


LSN SERIES Commercial Lighting

LSN-8FT-50W-MCTP-D
8FT NARROW STRIP

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!



Customer Name: _____
Project Name: _____
Note: _____ | Type: _____

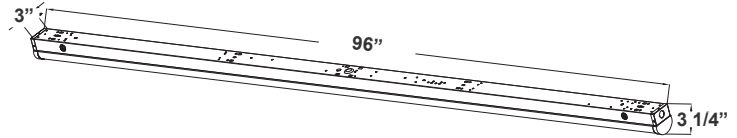

96"(L) x 3"(W) x 3 1/4"(H)

LED Strip Light is a cost-effective, energy-efficient lighting fixture for surface mount applications such as corridors, stairwells, public rooms, schools, hospitals utility areas, etc.

Ideal choice for residential, commercial, and industrial lighting. Steady performance and long lifetime. Ideal for applications requiring fixtures with motion sensor or battery backup, see factory-installed options below

Features

- High Lumen Efficiency
- Ceiling Mount or Suspended Mount
- Linkable (Optional Alignment Bracket Available)
- MCTP: Multi Color Temperature & Power (Selectable Switch Inside Fixture)

Technical Specifications

Electrical:

- Voltage: 120-277VAC 60Hz
- Wattage: 30W/40W/50W
- Power Factor: >0.99
- Efficacy: 130 LPW

Mechanical:

- Whit Finish
- Lens: Polycarbonate Frosted Lens, Shatter Resistant Translucent Lens Caps Illuminate With The Light.
- Integrated Lens & LED Module for Easy Installation & Ceiling Mount or Suspended Mount
- Junction Box Cover Kit Included, It Sits on Any 3" or 4" Round Junction Boxes
- Operating Temperature: -4°F -122°F
- Housing: Cold-rolled Steel
- Lens: Polycarbonate Frosted Lens
- IP20, Indoor Use Only
- 5-Year Warranty

Lighting:

- MCTP: Multi Color Temperature & Power (Selectable Switch Inside Fixture)
- Dimmable: 0~10V Dimming
- Total Lumens: 6500LM
- Color Temperatures: 3500K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Reduces Energy Consumption Up to 80% Compared to a Fluorescent Fixture
- Rated life: 50,000 Hrs

Applications:

- LED Strip Light is a cost-effective, energy-efficient lighting fixture for surface mount applications such as corridors, stairwells, public rooms, schools, hospitals utility areas, etc.
- Ideal for applications requiring fixtures with motion sensor or battery backup, see factory-installed options below
- Ideal for residential, commercial, and industrial lighting. Steady performance and long lifetime

Other Models:

- 80W | 10400LM | LSN-8FT-80W-MCTP-D





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |




WG-07252022

Photometrics: LSN-8FT-50W-MCTP-D

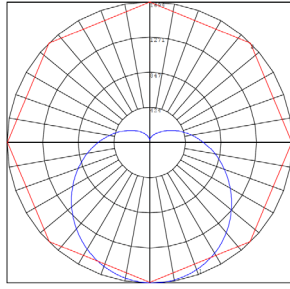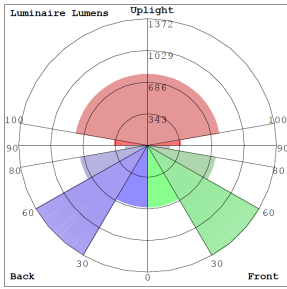

BUD Rating: B2-U4-G3

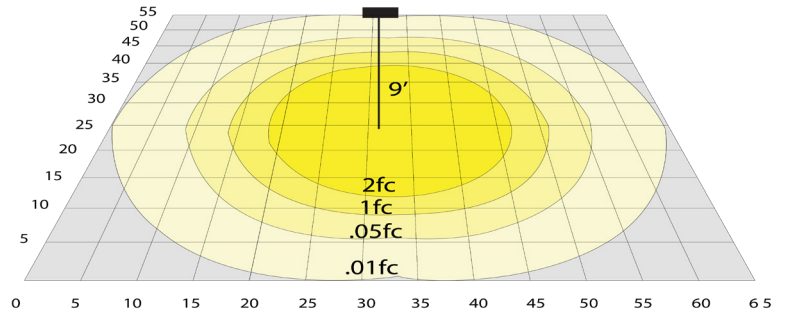

50W 5000K, Area 55'x 65' Mounting Height: 9'

Other Views:



Performance Table: LSN-8FT-50W-MCTP-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LSN-8FT-50W-MCTP-D	30W	120~277V	3900LM	3500K	B2-U4-G3	130
	40W		5200LM	4000K		
	50W		6500LM	5000K		

Sample Ordering

Model	Size	Wattage	Color Temp.	Dimming
LSN	8FT	50W	MCTP	D

Accessories:

- Blank = No Option For Accessories
- LSN-CB = LSN SERIES ALIGNMENT BRACKET
- SCL-TBC-WN = T-BAR CLIP WITH SUSPENSION HOLE ON TOP. WING NUT AND WASHER INCL.
- SCL-CSY = ADJUSTABLE 1/16" 6FT. SUSPENSION KIT WITH Y-CONNECTOR KEY HOLE SET + 2 T-BAR CLIPS + 1 CABLE BUSHING + 3 PLASTIC TIE STRAPS - 70 LBS. MAX LOAD
- SCL-GSY10 = HEAVY-DUTY ADJUSTABLE 1/16" 10FT. SUSPENSION KIT WITH Y-CONNECTOR & LOOP GRIPPER & HOOKS - 70 LBS. MAX LOAD (2 PER SET)
- SCL-GSY20 = HEAVY-DUTY ADJUSTABLE 1/16" 20FT. SUSPENSION KIT WITH Y-CONNECTOR & LOOP GRIPPER & HOOKS - 70 LBS. MAX LOAD (2 PER SET)
- SCL-GSY110 = ADJ. 20FT 1/16in SINGLE SUSPENSION CABLE WITH Y HOOK ENDS. LOOP GRIPPER ON TOP 70 LBS. MAX LOAD (ORDER 3 FOR 8FT.)
- SCL-GSY120 = ADJ. 20FT 1/16in SINGLE SUSPENSION CABLE WITH Y HOOK ENDS. LOOP GRIPPER ON TOP 70 LBS. MAX LOAD (ORDER 3 FOR 8FT.)
- LSN-4FT-WG = WIRE GUARD KIT FOR 4FT OR SET OF 2 FOR 8FT LSN STRIP LIGHT

Factory-Installed Options:

- Blank = No Option For Accessories
- OPT-EM-CM1INT= INTERNAL EMERGENCY BACKUP BATTERY
- OPT-SEN-2MDR-36= PROGRAMMABLE MICROWAVE BI-LEVEL
- OPT-HBC-125TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 125V
- OPT-HBC-277TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 277V
- OPT-HBC-125SB-WH = STRAIGHT BLADE PLUG 10FT, 15A,125V, 3-CONDUCTOR 18AWG
- WEC-3RC = OPTIONAL REMOTE

ACCESSORIES:



FACTORY-INSTALLED OPTIONS:

