LSS SERIES

Commercial Lighting





LED Strip Light is a cost-effective, energy-efficient lighting fixture for surface mount applications such as corridors, stairwells, public rooms, schools, hospitals utility areas, etc.

Ideal choice for residential, commercial, and industrial lighting. Steady performance and long lifetime. Ideal for applications requiring fixtures with motion sensor or battery backup, see factory-installed options below

Features

- High Lumen Efficiency
- Ceiling Mount or Suspended Mount

Technical Specifications

Electrical:

- Voltage: 120-277VAC 60Hz
- Wattage: 65W
- Power Factor: >0.99
- Efficacy: 135 LPW

Mechanical:

- White Finish
- High Lumen Efficiency Lumen
- Lens: Polycarbonate Frosted Lens, Shatter Resistant
- Ceiling Mount or Suspended Mount
- Operating Temperature: -4°F to 122°F
- Housing: Cold-rolled Steel
- Lens: Polycarbonate Frosted Lens
- IP44, Suitable For Damp Location
- 5-Year Warranty

Project Name:		
Note:	Туре:	
- '''	L	

- Linkable (Optional Alignment Bracket Available)
- MCT: Multi Color Temperature (Selectable Switch Inside Fixture)

Lighting:

- Dimmable: 0~10V Dimming
- Total Lumens: 8800LM
- Color Temperatures: 3500K/ 4000K/ 5000K
- Multi-CCT (Selectable switch inside fixture)
- Color Rendering Index: CRI ≥ 80
- Reduces Energy Consumption Up to 80% Compared to a Fluorescent Fixture
- Rated life: 50,000 Hrs

Applications:

- LED Strip Light is a cost-effective, energy-efficient lighting fixture for surface mount applications such as corridors, stairwells, public rooms, schools, hospitals utility areas, etc.
- Ideal for applications requiring fixtures with motion sensor or battery backup, see factory-installed options below
- Ideal for residential, commercial, and industrial lighting. Steady performance and long lifetime


Other Models:

• 65W | 8800LM | LSS-8FT-65W-MCT-BK







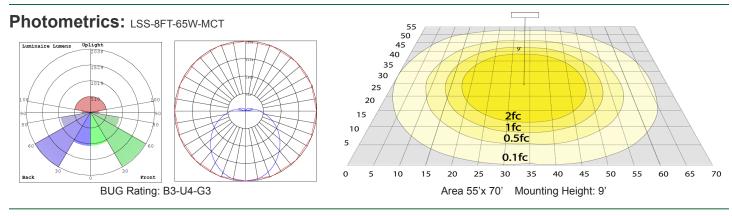

Other Views:

						1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1			
Side View Front V		iew		Back View					
Performance Table: LSS-8FT-65W-MCT									
MODEL NO.	Wattage	Voltage	Lumens		Color Temp.	BUG Rating	LPW		
LSS-8FT-65W-MCT	65W	120~277V	8800LM		3500K 4000K 5000K	B3-U4-G3	135		
Sample Ordering ACCESSORIES:									
Model Size Wattage Color Temp. LSS = 8FT = 65W = MCT Accessories = 65W = MCT Blank = No Option For Accessories = Sci. Tec.WN = T.BAR CLIP WITH SUSPENSION HOLE ON TOP. WING NUT AND WASHER INCL. SCI. TBC-WN = T.BAR CLIP WITH SUSPENSION HOLE ON TOP. WING NUT AND WASHER INCL. Sci. GSY10 = HEAVY-DUTY ADJUSTABLE 1/16" 10FT. SUSPENSION KIT WITH Y-CONNECTOR & LOOP GRIPPER & HOOKS - 70 LBS. MAX LOAD (2 PER SET) SCI. GSY20 = HEAVY-DUTY ADJUSTABLE 1/16" 20FT. SUSPENSION KIT WITH Y-CONNECTOR & LOOP GRIPPER & HOOKS - 70 LBS. MAX LOAD (2 PER SET) Sci. GSY110 = ADJ. 20FT 1/16in SINGLE SUSPENSION CABLE WITH Y HOOK ENDS. LOOP GRIPPER ON TOP 70 LBS. MAX LOAD (ORDER 3 FOR 8FT.) Sci. GSY110 = ADJ. 20FT 1/16in SINGLE SUSPENSION CABLE WITH Y HOOK ENDS. LOOP GRIPPER ON TOP 70 LBS. MAX LOAD (ORDER 3 FOR 8FT.) Sci. GSY120 = ADJ. 20FT 1/16in SINGLE SUSPENSION CABLE WITH Y HOOK ENDS. LOOP GRIPPER ON TOP 70 LBS. MAX LOAD (ORDER 3 FOR 8FT.) Sci. GSY120 = ADJ. 20FT 1/16in SINGLE SUSPENSION CABLE WITH Y HOOK ENDS. LOOP GRIPPER ON TOP 70 LBS. MAX LOAD (ORDER 3 FOR 8FT.) Sci. GSY120 = ADJ. 20FT 1/16in SINGLE SUSPENSION SING CANOPY SET WITH Y DOUBLE KEY-HOLE END CONNECTORS, NONPOWER SIDE Sci. GSY1P-6FT = ADJ. 6FT 1/16in SINGLE SUSPENSION 5in CANOPY SET WITH Y DOUBLE KEY-HOLE END CONNECTORS, POWER SIDE WITH SJTW18/5 WHITE CORD					Image: state stat				
Factory-Installed (Blank = No Option For Accessories OPT-EM-CM2INT= INTERNAL EMERGE OPT-SEN-2US = ULTRASONIC BI-LEVE OPT-HBC-125SL-WH = NEMA TWIST-LU OPT-HBC-277TL-WH = NEMA TWIST-LU OPT-HBC-125SB-WH = STRAIGHT BLA WEC-3RC = OPTIONAL REMOTE OPT-FWH-63 = 6FT 3-WIRE WHIP OPT-FWH-65 = 6FT 5-WIRE WHIP	ENCY BACKUP BATT EL DIMMING (REMOT OCK PLUG 8FT, 15A OCK PLUG 8FT, 15A	E NOT NEEDED) 125V 277V	NG	OPT-HBC-128		2US WEC-3RC FOR	HBC-277TL-WH ABC-277TL-WH OPT-FWH-63 OPT-FWH-65		

2

WESTGATE

