

LSS-8FT-65W-MCT-BK

Avail Finish:



Multi Color Temperature (Selectable)

Customer Name:

Project Name:		
Note:	Туре:	
	L	• W

88 3/4"(L) x 2 3/5"(W) x 2 2/3"(H)

LED Strip Light is a cost-effective, energy-efficient lighting fixture for surface mount applications such as corridors, stairwells, public rooms, schools, hospitals utility areas, etc.

Ideal choice for residential, commercial, and industrial lighting. Steady performance and long lifetime. Ideal for applications requiring fixtures with motion sensor or battery backup, see factory-installed options below

Features

- High Lumen Efficiency
- Ceiling Mount or Suspended Mount

Technical Specifications

Electrical:

- Voltage: 120-277VAC 60Hz
- Wattage: 65W
- Power Factor: >0.99
- Efficacy: 135 LPW

Mechanical:

- Black Finish
- High Lumen Efficiency Lumen
- Lens: Polycarbonate Frosted Lens, Shatter Resistant
- Ceiling Mount or Suspended Mount
- Operating Temperature: -4°F to 122°F
- Housing: Cold-rolled Steel
- IP44, Suitable For Damp Location
- 5-Year Warranty

- Linkable (Optional Alignment Bracket Available)
- MCT: Multi Color Temperature (Selectable Switch Inside Fixture)

Lighting:

- Dimmable: 0~10V Dimming
- Total Lumens: 8800LM
- Color Temperatures: 3500K/ 4000K/ 5000K
- Multi-CCT (Selectable switch inside fixture)
- Color Rendering Index: CRI ≥ 80
- Reduces Energy Consumption Up to 80% Compared to a Fluorescent Fixture
- Rated life: 50.000 Hrs

Applications:

- LED Strip Light is a cost-effective, energy-efficient lighting fixture for surface mount applications such as corridors, stairwells, public rooms, schools, hospitals utility areas, etc.
- Ideal for applications requiring fixtures with motion sensor or battery backup, see factory-installed options below
- Ideal for residential, commercial, and industrial lighting. Steady performance and long lifetime


Other Models:

65W | 8800LM | LSS-8FT-65W-MCT







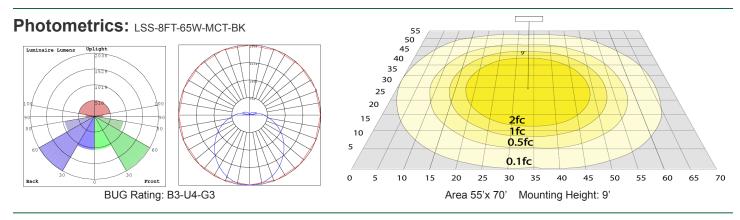

Other Views:

Side View			Front View			Back View				
Performance Table: LSS-8FT-65W-MCT-BK										
MODEL NO.	Wattage	Voltage	Lun	mens Color Temp		BUG Rating	LPW			
LSS-8FT-65W-MCT-BK	65W	120~277V	8800LM		3500K 4000K 5000K	B3-U4-G3	135			
Sample Ordering ACCESSORIES:										
Model Size Wattage Color Temp. Housing										
LSS = 8FT = 65W = MCT = BK										
Accessories:										
Blank = No Option For Accessories LSS-CB2 = ALIGNMENT BRACKET SCL-TBC-WN = T-BAR CLIP WITH SUSPENSION HOLE ON TOP. WING NUT AND WASHER INCL. SCL-GSY10 = HEAVY-DUTY ADJUSTABLE 1/16" 10FT. SUSPENSION KIT WITH Y-CONNECTOR & LOOP GRIPPER & HOOKS - 70 LBS. MAX LOAD (2 PER SET) SCL-GSY20 = HEAVY-DUTY ADJUSTABLE 1/16" 20FT. SUSPENSION KIT WITH Y-CONNECTOR & LOOP GRIPPER & HOOKS - 70 LBS. MAX LOAD (2 PER SET) SCL-GSY110 = ADJ. 20FT 1/16 in SINGLE SUSPENSION CABLE WITH Y HOOK ENDS. LOOP GRIPPER ON TOP 70 LBS. MAX LOAD (ORDER 3 FOR 8FT.) SCL-GSY120 = ADJ. 20FT 1/16 in SINGLE SUSPENSION CABLE WITH Y HOOK ENDS. LOOP GRIPPER ON TOP 70 LBS. MAX LOAD (ORDER 3 FOR 8FT.) SCL-CSY16FT = ADJ. 6FT 1/16 in SINGLE SUSPENSION 5 in CANOPY SET WITH Y DOUBLE KEY- HOLE END CONNECTORS, NONPOWER SIDE SCL-CSY19-6FT = ADJ. 6FT 1/16 in SINGLE SUSPENSION 5 in CANOPY SET WITH Y DOUBLE KEY- HOLE END CONNECTORS, POWER SIDE WITH SJTW18/5 WHITE CORD				SCL-GSY110 SCL-GSY120 SCL-TBC-WN BRACKET (Can be painted)						
Factory-Installed C	NCY BACKUP BATT L DIMMING (REMOT ICK PLUG 8FT, 15A, ICK PLUG 8FT, 15A,	E NOT NEEDED) 125V 277V	VG	OPT-HBC-124		U U U U U U U U U U U U U U	HBC-277TL-WH			

2

WESTGATE

