LSWX SERIES Outdoor Lighting

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

LSWX-13-26W-MCTP-PC-BR
LSWX-13-26W-MCTP-PC-BK
LSWX-13-26W-MCTP-PC-WH

POWER & CCT-ADJUSTABLE SMALL WALL PACK WITH PHOTOCELL

MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)

Customer Name:


Project Name:

Note: | Type:



Avail. Finishes:



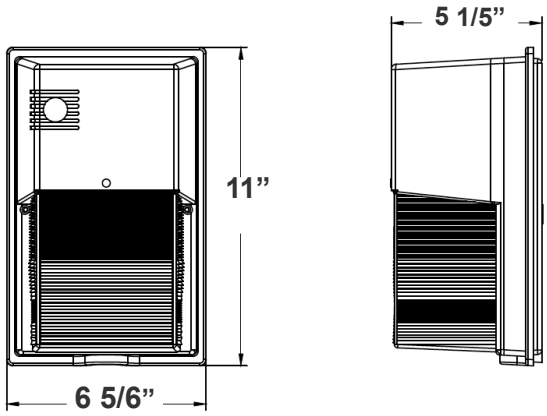

11”(L) x 6 5/6”(W) x 5 1/5”(H)

LED Non-Cutoff Wall Pack with Photocell is ideal for general site lighting, loading docks, doorway, pathway and parking areas.

Features

- Back plate: Die-cast aluminum
- Threaded 1/2” Knockout Provided on Top Section of the Back
- Polycarbonate Housing & Lens
- 7-Year Warranty
- Multi-Power (The switch is inside the fixture)

Technical Specifications

Electrical:

- Voltage: 120-277V AC 60Hz
- Wattage: 13W/20W/26W
- Power Factor: >0.90
- Efficacy: 162 LPW
- Includes Pre-wired Photo Electric Control (Dusk to Dawn Photocell), 120 Volt, Removable
- Photocell Response Time: Maximum 3 Seconds

Mechanical:

- Back plate: Aluminum LED board: High Conductive, Waterproof, Aging Resistance, Salt Mist Resistance
- Threaded 1/2” Knockout Provided on Top Section of the Back
- Polycarbonate Housing & Lens
- Non-Cutoff Optics Ideal for Maximum Light Distribution
- Operating Temperature: -4ºF -104ºF
- Wet Location
- 7-Year Warranty
- IP54

Lighting:

- LED Type/Brand: 2835LUMILEDS
- Front: Polycarbonate Lens and Housing
- Multi-Power (The switch is inside the fixture)
- Total Lumens: 4231LM Max.
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 70
- Beam Angle: 90° x 110°
- Rated life: 70,000 Hrs

Applications:


- Ideal for general site lighting, loading docks, doorway, pathway and parking areas.


UL LISTED | WET LOCATION | IP54

Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |


WG-07182024

Photometrics: LSWX-13-26W-MCTP-PC





BUD Rating: B1-U3-G1

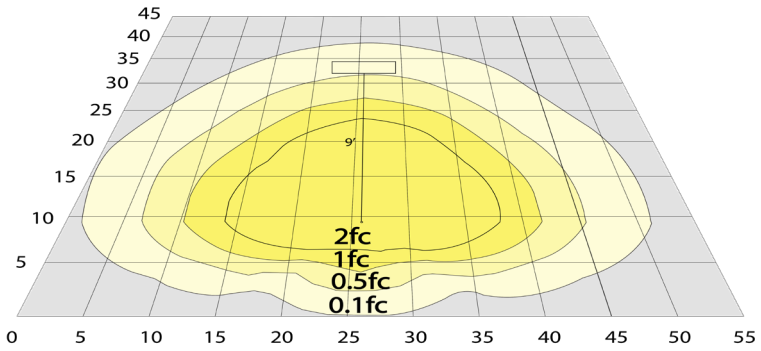

Area 45'x 55' Mounting Height: 9'

Other Views:

LSWX-13-26W-MCTP-PC-BR




Side View



Front View



Back View



Bottom View

LSWX-13-26W-MCTP-PC-BK




Side View



Front View



Back View



Bottom View

LSWX-13-26W-MCTP-PC-WH



Side View



Front View



Back View



Bottom View

Performance Table: LSWX-13-26W-MCTP-PC

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LSWX-13-26W-MCTP-PC-BR LSWX-13-26W-MCTP-PC-BK LSWX-13-26W-MCTP-PC-WH	13W 20W 26W	120~277V	4231LM	3000K 4000K 5000K	B1-U3-G1	162

Sample Ordering

Model	Min.	Max.Wattage	Color Temp.	Feature	Finishes
LSW	13	26		PC	
			30K = 3000K 40K = 4000K 50K = 5000K		BR = BRONZE BK = BLACK WH = WHITE

Factory-Installed Options:

Blank = No Option For Accessories
OPT-NOPC = REMOVE PHOTOCELL
OPT-EM-LSW = INTERNAL EMERGENCY BATTERY BACK UP
OPT-TRS-T20 = TAMPER RESISTANT SCREW
OPT-SEN-SLPIR = EXTERNAL SECURITY LIGHT TYPE PIR MOTION SENSOR

FACTORY-INSTALLED OPTIONS:



OPT-SEN-SLPIR



OPT-EM-LSW