

# LTRA SERIES Commercial Lighting

## LTRA-2X4-MCTP

ARCHITECTURAL GRILLE TROFFER, WATTAGE & CCT SELECTABLE

**MCTP** Multi Color Temperature & Multi Power/Wattage (Selectable)


**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

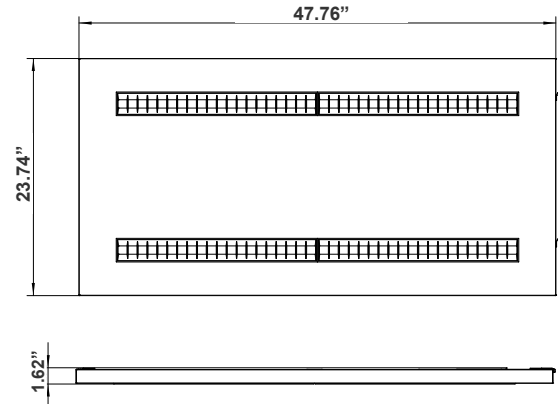

The Architectural Grille Troffer with wattage and CCT selectability offers customizable illumination for commercial and architectural spaces. Featuring adjustable light output and color temperatures (3000K-5000K), it provides energy-efficient, versatile, and aesthetically pleasing lighting.

1.62"(D) x 47.76"(W) x 23.74"(H)

## Features

- High Quality LED Chips Provide High Efficiency, Heat Dissipation, Stability, and Lumen Maintenance
- 5-Year Warranty
- 50,000 Hours Rated Life
- Lens: Polycarbonate
- Multi CCT: Selectable Multi-CCT & Power Switches Inside The Driver Box

## Technical Specifications

### Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 30W/40W/50W/60W
- Power Factor: >0.92
- Efficacy: 125 LPW

### Mechanical:

- High Quality LED Chips Provide High Efficiency, Heat Dissipation, Stability, And Lumen Maintenance
- Individual, Pure Aluminum Heat Sinks Offers Heat Transmission Faster Than Die Cast Steel
- Driver Disconnect provided Where Required to Comply With US And Canadian Codes
- Performance Engineered Optical Lens Assembly Delivers Unique Beam Angles and Reduces Glare
- Polycarbonate Lens
- Operating Temp: -22°F to 104°F
- 5-Year Warranty

### Lighting:

- Dimmable: 0~10V Dimming
- Multi CCT: Selectable Multi-CCT & Power Switches Inside The Driver Box
- Total Lumens: 7500LM Max.
- Color Temperatures: 3500K/4000K/5000K
- Inside The Driver Box
- Color Rendering Index: CRI ≥ 80
- IP Rating: IP20 Indoor use only
- 50,000 Hours Rated Life

### Applications:

- Ideal for offices, schools, healthcare, and retail settings, this sleek fixture ensures seamless integration and optimal visual comfort.




Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com |





WG-11182024

## Photometrics: LTRA-2X4-MCTP



BUG Rating: B2-U3-G2

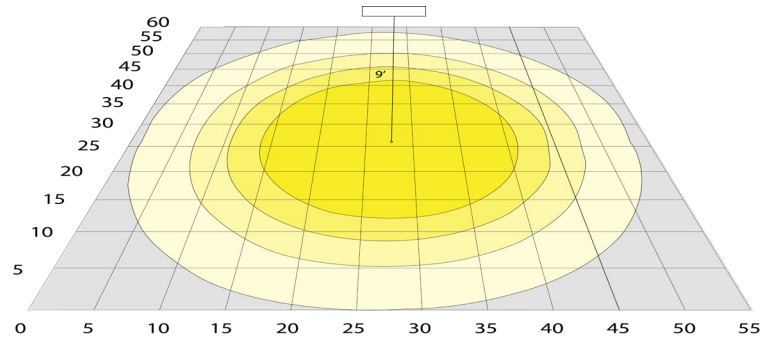


Area 60'x 55' Mounting Height: 9'

## Other Views:



Side View

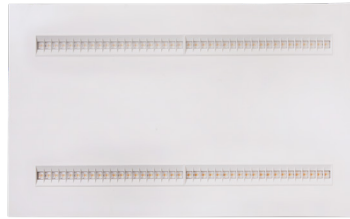

Front View



Back View

## Performance Table: LTRA-2X4-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LTRA-2X4-MCTP	30W 40W 50W 60W	120~277V	3750LM 5000LM 6250LM 7500LM	3500K 4000K 5000K	B2-U3-G2	125

## Sample Ordering

Model Size Color Temp./Watts

LTRA - 2X4 - MCTP


## Accessories:

Blank = No Option For Accessories  
LPNG-SRFC-2X4 = SURFACE MOUNTING KIT

## Factory-Installed Options:

Blank = No Option For Accessories  
OPT-EM-LTRA = EXTERNAL EMERGENCY BACKUP BATTERY MOUNTED ON TOP  
OPT-SEN-2MRD-36 = PROGRAMMABLE MICROWAVE BI-LEVEL SENSOR  
WEC-3RC = OPTIONAL REMOTE CONTROL  
OPT-FWH-63 = 6FT 3-WIRE WHIP  
OPT-FWH-65 = 6FT 5-WIRE WHIP  
OPT-FWH-66 = 6FT 6-WIRE WHIP

## ACCESSORIES and MOUNTING KIT:

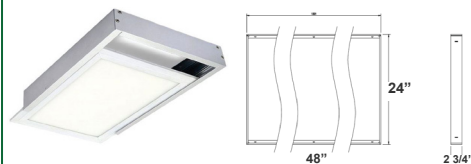

LPNG-SRFC-2X4

## FACTORY-INSTALLED OPTIONS:



OPT-EM-LTRA



OPT-SEN-2MDR-36



OPT-FWH-63  
OPT-FWH-65  
OPT-FWH-66



WEC-3RC

