

LTRE SERIES

Commercial Lighting

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

LTRE-G2-2X2-MCTP

G2 PREMIUM CENTER-LENS TROFFER
POWER AND CCT ADJUSTABLE




Multi Color Temperature &
Multi Power/Wattage (Selectable)

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

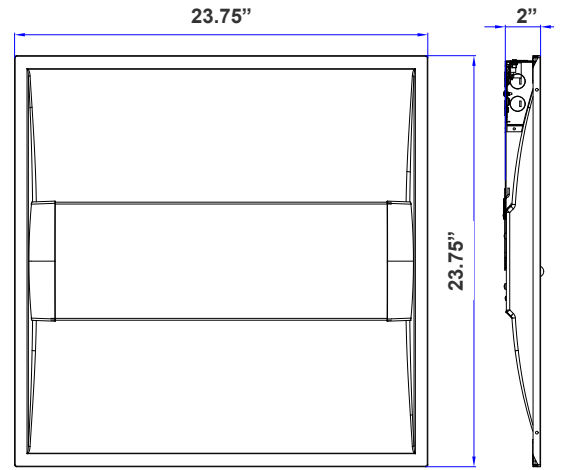

23.75"(L) x 23.75"(W) x 2"(H)

G2 Premium Center-Lens Troffer featuring adjustable power and CCT, offering flexible, energy-efficient lighting ideal for commercial and institutional applications.

Features

- 5-Year Warranty
- White Finish
- Rated Life: 50,000 Hours
- Lens: Polycarbonate
- Multi CCT & Power (Selectable Switch On Back Of Fixture)

Technical Specifications

Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 15W/20W/25W/30W/40W
- Power Factor: >0.97
- Efficacy: 125 LPW

Mechanical:

- White Finish
- Cold-Rolled Steel
- Earthquake Hooks Built Into The Housing
- Operating Temperature: -4°F ~ 122°F
- 5-Year Warranty

Lighting:

- Multi CCT & Power (Selectable Switch On Back Of Fixture)
- Dimmable: 0~10V Dimming
- LED Type: SMD 2835
- Total Lumens: 5000LM Max.
- Color Rendering Index: CRI ≥ 80
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Rated Life: 50,000 Hours

Applications:

- This LED Center Basket Troffer Light is ideal for Hotels, Offices, Retail Outlets, Restaurants, Storage





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |




WG-10272022

Photometrics: LTRE-G2-2X2-MCTP



BUG Rating: B1-U3-G1

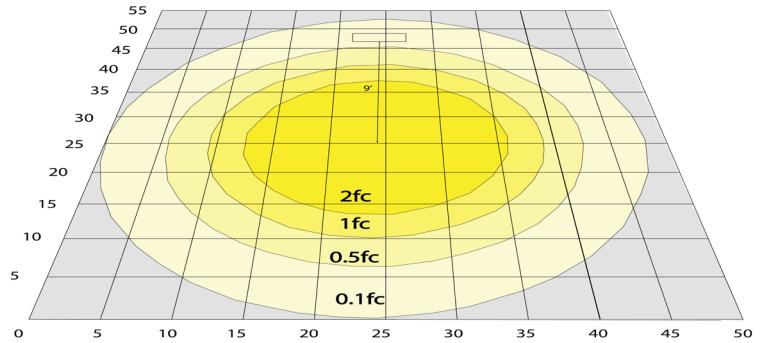

Area 55'x 50' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: LTRE-G2-2X2-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LTRE-G2-2X2-MCTP	15W	120~277V	1875LM	2700K	B1-U3-G1	125
	20W		2500LM	3000K		
	25W		3125LM	3500K		
	30W		4000LM	4000K		
	40W		5000LM	5000K		

Sample Ordering

Model	Generation	Size	Watt/Color Temp.
LTRE	-	G2	-
		2X2	-
			MCTP


Accessories:

Blank = No Option For Accessories
OPT-2X4-RL = RIBBED LENS FOR 2X2
WEC-3RC = OPTIONAL REMOTE CONTROL

Factory-Installed Options:

Blank = No Option For Accessories
OPT-EM-LTRM = MOUNTED ON TOP
OPT-FWH-6 = 6FT 3-WIRE WHIP
OPT-FWH-65 = 6FT 5-WIRE WHIP
OPT-FWH-66 = 6FT 6-WIRE WHIP
OPT-SEN-2MDR-36 = PROGRAMMABLE MICROWAVE BI-LEVEL
OPT-SEN-NLS-2MDR-36 = WG NETWORK SENSOR
OPT-SEN-KEILTON-2MDR-36 = KEILTON NETWORK SENSOR

ACCESSORIES & MOUNTING KIT:

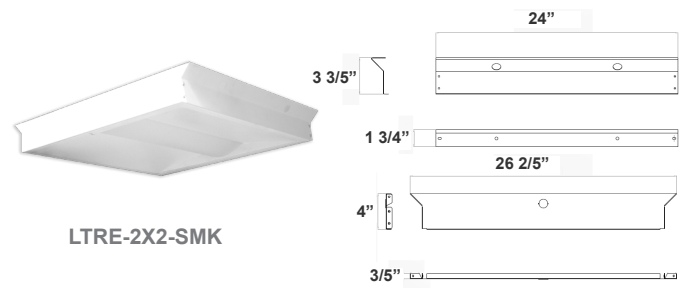

LTRE-2X2-SMK

BUILT-IN SWITCH:



MULTI-CCT & WATTAGE



WEC-3RC

FACTORY-INSTALLED OPTIONS:



OPT-EM-LTRE



OPT-SEN-3MRLV-5



OPT-FWH-63
OPT-FWH-65
OPT-FWH-66

