


LTRG SERIES Commercial Lighting

LTRG-1X4-MCTP
ARCHITECTURAL GRILLE TROFFER, WATTAGE & CCT SELECTABLE
MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)

Customer Name: _____
Project Name: _____
Note: _____ | Type: _____

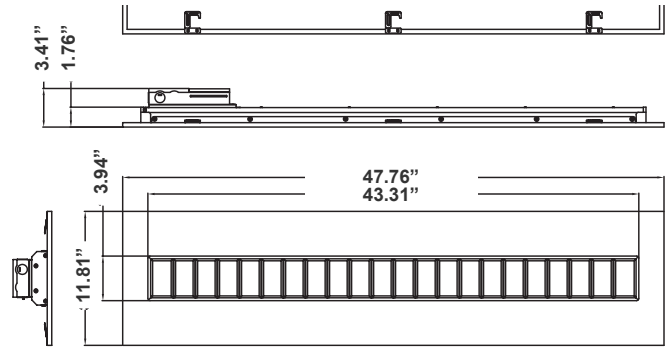

The Architectural Grille Troffer with wattage and CCT selectability offers customizable illumination for commercial and architectural spaces. Featuring adjustable light output and color temperatures (3000K-5000K), it provides energy-efficient, versatile, and aesthetically pleasing lighting.

3.41"(D) x 47.76"(W) x 11.81"(H)

Features

- High Quality LED Chips Provide High Efficiency, Heat Dissipation, Stability, and Lumen Maintenance
- 7-Year Warranty
- 70,000 Hours Rated Life
- Lens: Polycarbonate
- Multi CCT: Selectable Multi-CCT & Power Switches Inside The Driver Box

Technical Specifications

Electrical:

- Voltage: 120-277V AC 50/60Hz
- Wattage: 24W/28W/36W
- Power Factor: >0.92
- Efficacy: 120 LPW

Mechanical:

- High Quality LED Chips Provide High Efficiency, Heat Dissipation, Stability, And Lumen Maintenance
- Individual, Pure Aluminum Heat Sinks Offers Heat Transmission Faster Than Die Cast Steel
- Driver Disconnect provided Where Required to Comply With US And Canadian Codes
- Performance Engineered Optical Lens Assembly Delivers Unique Beam Angles and Reduces Glare
- Polycarbonate Lens
- Operating Temp: -22°F to 104°F
- IP Rating: IP20 Indoor use only
- 7-Year Warranty

Lighting:



- Dimmable: 0~10V Dimming
- Multi CCT: Selectable Multi-CCT & Power Switches Inside The Driver Box
- Total Lumens: 2880LM/3360LM/4320LM
- Color Temperatures: 3500K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- 70,000 Hours Rated Life

Applications:


- Ideal for offices, schools, healthcare, and retail settings, this sleek fixture ensures seamless integration and optimal visual comfort.



Photometrics: LTRG-1X4-MCTP



BUG Rating: B2-U3-G2

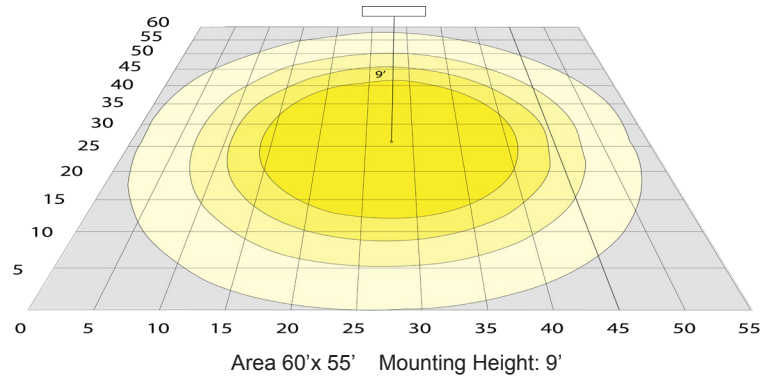

Other Views:



Side View



Back View

Performance Table: LTRG-1X4-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LTRG-1X4-MCTP	24W 28W 36W	120~277V	2880LM 3360LM 4320LM	3500K 4000K 5000K	B2-U3-G2	120

Sample Ordering

Model Size Color Temp./Watts

LTRG - 1X4 - MCTP

Factory-Installed Options:

Blank = No Option For Accessories
 OPT-EM-LTRG = EXTERNAL EMERGENCY BACKUP BATTERY MOUNTED ON TOP
 OPT-SEN-2MRD-36 = PROGRAMMABLE MICROWAVE BI-LEVEL SENSOR
 WEC-3RC = OPTIONAL REMOTE CONTROL
 OPT-FWH-63 = 6FT 3-WIRE WHIP
 OPT-FWH-65 = 6FT 5-WIRE WHIP
 OPT-FWH-66 = 6FT 6-WIRE WHIP

FACTORY-INSTALLED OPTIONS:



OPT-EM-LTRG



OPT-FWH-63
 OPT-FWH-65
 OPT-FWH-66



WEC-3RC



OPT-SEN-2MRD-36

