

LTRI SERIES

Commercial Lighting

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

LTRI-2X4-MCTP

SPEC SERIES INDIRECT MESH-BASKET TROFFER
WATTAGE AND CCT SELECTABLE

MCTP Multi Color Temperature &
Multi Power/Wattage (Selectable)




Customer Name: _____

Project Name: _____

Note: _____

Type: _____

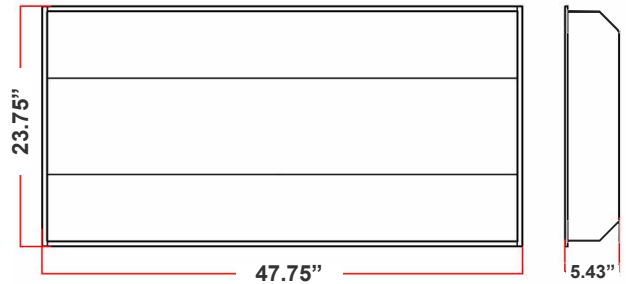

The SPEC Series Indirect Mesh-Basket Troffer features a modern design with high-efficiency performance. It offers selectable wattage and CCT options, providing flexibility to adjust brightness and color temperature based on application needs. Ideal for offices, schools, and commercial spaces, this fixture delivers uniform, glare-free illumination with a sleek architectural appearance.

47.75"(L) x 23.75"(W) x 5.43"(H)

Features

- 5-Year Warranty
- White Finish
- Rated Life: 50,000 Hours
- Lens: Polycarbonate
- Multi CCT & Power (Selectable Switch On Back Of Fixture)

Technical Specifications

Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 50W/60W/72W
- Power Factor: >0.97
- Efficacy: 110 LPW

Mechanical:

- White Finish
- Cold-Rolled Steel
- Earthquake Hooks Built Into The Housing
- Operating Temperature: -4°F ~ 122°F
- 5-Year Warranty

Lighting:

- Multi CCT & Power (Selectable Switch On Back Of Fixture)
- Dimmable: 0~10V Dimming
- LED Type: SMD 2835
- Total Lumens: 7920LM Max.
- Color Rendering Index: CRI ≥ 80
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Rated Life: 50,000 Hours

Applications:

- This LED Center Basket Troffer Light is ideal for Hotels, Offices, Retail Outlets, Restaurants, Storage





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |




WG-10272022

Photometrics: LTRI-2X4-MCTP



BUG Rating: B2-U3-G2

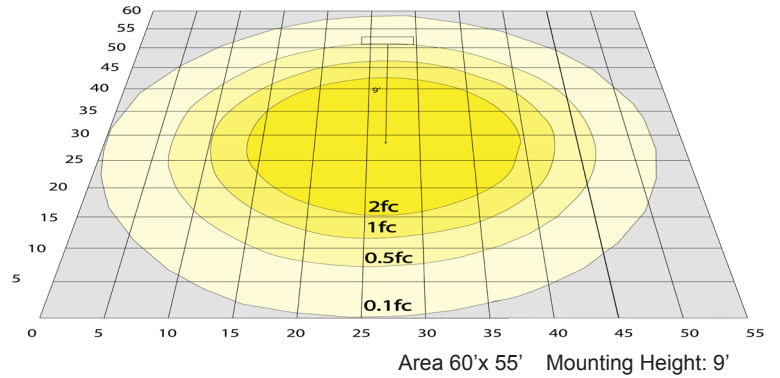

Other Views:



Side View



Night View

Performance Table: LTRI-2X4-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LTRI-2X4-MCTP	50W 60W 72W	120~277V	5500LM 6600LM 7920LM	3000K 3500K 4000K 5000K	B2-U3-G2	110

Sample Ordering

Model Size Watt/Color Temp.

LTRI - 2X4 - MCTP

Factory-Installed Options:

Blank = No Option For Accessories
 OPT-EM-LTRM = MOUNTED ON TOP
 OPT-FWH-6 = 6FT 3-WIRE WHIP
 OPT-FWH-65 = 6FT 5-WIRE WHIP
 OPT-FWH-66 = 6FT 6-WIRE WHIP
 OPT-SEN-2MDR-36 = PROGRAMMABLE MICROWAVE BI-LEVEL
 OPT-SEN-NLS-2MDR-36 = WG NETWORK SENSOR
 OPT-SEN-KEILTON-2MDR-36 = KEILTON NETWORK SENSOR

FACTORY-INSTALLED OPTIONS:



OPT-EM-LTRE



OPT-SEN-3MRLV-5



OPT-FWH-63
 OPT-FWH-65
 OPT-FWH-66

