
## LVC SERIES Indoor Lighting

LVC-24-MCT5-BN 24" MULTI-CCT VANITY LIGHTS



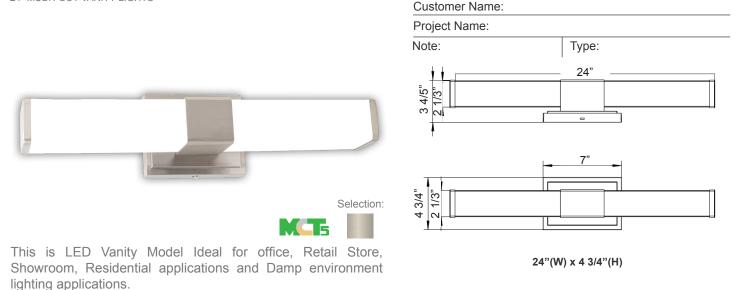

## **Features**

- Corrosion and Heat Resistance Powder Coated
- Finish: Brushed Nickel
- Durable Die-cast Aluminum

- Lens Type: Polycarbonate Lens
- MCT: Multi Color Temperature (Selectable Switch Inside Fixture)

# **Technical Specifications**

#### **Electrical:**

Voltage: 120V AC 50/60Hz

Wattage: 16WPower Factor: >0.95

Total Harmonic Distortion: ≤ 20 %

· Efficacy: 70 LPW

#### **Mechanical:**

- Corrosion and Heat Resistance Powder Coated
- Finish: Brushed Nickel
- Durable Die-cast Aluminum
- Lens Type: Polycarbonate Lens
- Suitable for Damp Location
- Operating Temperature: -22°F to 104°F

#### **Lighting:**

- Dimming: TRIAC Dimming (Dimmable Down to 5% Compatible with Traic and ELV Dimmers)
- Total Lumens: 1120LM
- Color Temperatures: 2700K/ 3000K/3500K/4000K/5000K
- Multi-CCT(Selectable Switch Inside Fixture)
- Color Rendering Index: CRI ≥ 90
- 50,000 Hours Rated Life
- 5-Year Warranty
- Beam Angle: 104.8°(H) x 100.5°(V)

#### **Applications:**

 Ideal for Office, Retail Store, Showroom, Residential Applications and Damp Environment Lighting Applications

#### Other Models:

• 24W | 1680LM | LVC-36-MCT5-BN















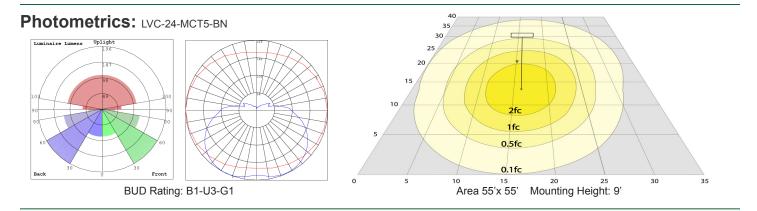

## **Other Views:**



## Performance Table: LVC-24-MCT5-BN

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LVC-24-MCT5-BN	16W	120V	1120LM	2700K 3000K 3500K 4000K 5000K	B1-U3-G1	70

# Sample Ordering

Model	Size	Color Temp.	Housing	
LVC -	24	<b>–</b> MCT5 <b>–</b>	BN	

## **Example:**

1. LVC-24-MCT5-BN

(For LVC 16W MCT5 fixture 120V)

Other Model: LVC-36-MCT5-BN

