


# LVD SERIES Indoor Lighting

LVD-48-MCT5-BN  
48" MULTI-CCT VANITY LIGHTS

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_ | Type: \_\_\_\_\_

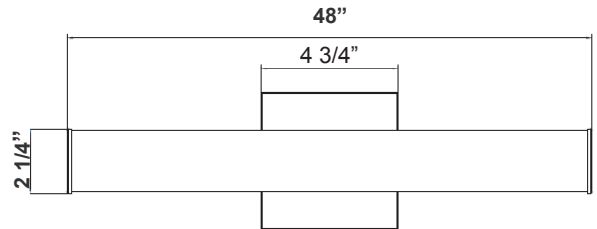

Selection:



This is LED Vanity Model Ideal for office, Retail Store, Showroom, Residential applications and Damp environment lighting applications.

48"(W) x 2 1/4"(H)

## Features

- Corrosion and Heat Resistance Powder Coated
- Finish: Brushed Nickel
- Durable Die-cast Aluminum
- Lens Type: Polycarbonate Lens
- MCT: Multi Color Temperature (Selectable Switch Inside Fixture)

## Technical Specifications

### Electrical:

- Voltage: 120V AC 50/60Hz
- Wattage: 32W
- Power Factor: >0.95
- Total Harmonic Distortion: ≤ 20 %
- Efficacy: 84 LPW

### Mechanical:

- Corrosion and Heat Resistance Powder Coated
- Finish: Brushed Nickel
- Durable Die-cast Aluminum
- Lens Type: Polycarbonate Lens
- IP20, Indoor Use only
- Operating Temperature: -22°F to 104°F

### Lighting:

- Dimming: TRIAC Dimming (Dimmable Down to 5% Compatible with Traic and ELV Dimmers)
- Total Lumens: 2700LM
- Color Temperatures: 2700K/ 3000K/3500K/4000K/5000K
- Multi-CCT(Selectable Switch Inside Fixture)
- Color Rendering Index: CRI ≥ 90
- 50,000 Hours Rated Life
- 5-Year Warranty
- Beam Angle: 104.8°(H) x 100.5°(V)

### Applications:



- Ideal for Office, Retail Store, Showroom, Residential Applications and Damp Environment Lighting Applications

• 16W | 1300LM | LVD-24-MCT5-BN


• 24W | 2000LM | LVD-36-MCT5-BN



## Photometrics: LVD-48-MCT5-BN



BUD Rating: B1-U3-G1

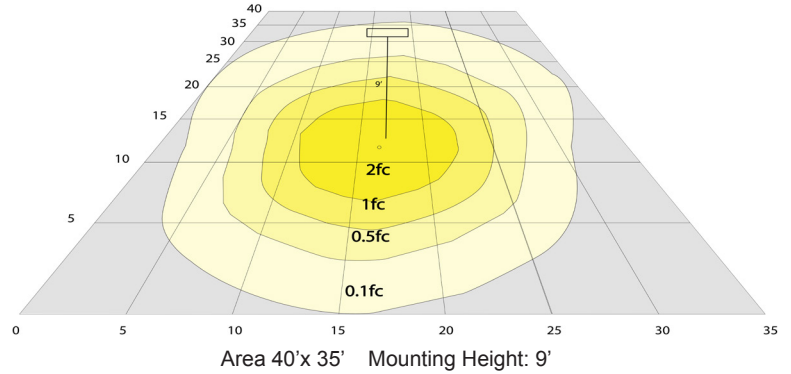

## Other Views:



Side View



Front View



Back View

## Performance Table: LVD-48-MCT5-BN

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LVD-48-MCT5-BN	32W	120V	2700LM	2700K 3000K 3500K 4000K 5000K	B1-U3-G1	84

## Sample Ordering

Model Size Color Temp. Housing

LVD - 48 - MCT5 - BN

## Example:

1. LVD-48-MCT5-BN

(For LVD 32W MCT5 fixture 120V)

## OTHER MODEL: LVD-36-MCT5-BN



Side View



Front View



Back View

