

LVD SERIES Indoor Lighting

LVD-WS-MCT5-BN
MODEL LVD ARCHITECTURAL LED MULTI COLOR-TEMPERATURE
VANITY LIGHT WITH TUBE PC

MCT5 Multi Color Temperature (Selectable)




This is LED Vanity Model Ideal for office, Retail Store, Showroom, Residential applications and Damp environment lighting applications.

Customer Name: _____

Project Name: _____

Note: _____ Type: _____

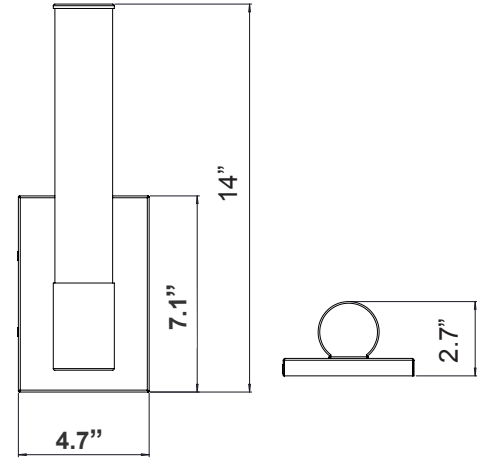

4.7"(W) x 14"(H) x 2.7"(D)

Features

- Corrosion and Heat Resistance Powder Coated
- Finish: Brushed Nickel
- Durable Die-cast Aluminum
- Lens Type: Polycarbonate Lens
- MCT: Multi Color Temperature (Selectable Switch Inside Fixture)

Technical Specifications

Electrical:

- Voltage: 120V AC 50/60Hz
- Wattage: 16W
- Power Factor: >0.95
- Total Harmonic Distortion: ≤ 20 %
- Efficacy: 85LPW

Mechanical:

- Corrosion and Heat Resistance Powder Coated
- Finish: Brushed Nickel
- Durable Die-cast Aluminum
- Lens Type: Polycarbonate Lens
- IP20, Indoor Use only
- Operating Temperature: -22°F to 104°F

Lighting:

- Dimming: TRIAC Dimming (Dimmable Down to 5% Compatible with Traic and ELV Dimmers)
- Total Lumens: 1360LM
- Color Temperatures: 2700K/ 3000K/3500K/4000K/5000K
- Multi-CCT(Selectable Switch Inside Fixture)
- Color Rendering Index: CRI ≥ 90
- 50,000 Hours Rated Life
- 5-Year Warranty
- Beam Angle: 104.8°(H) x 100.5°(V)

Applications:

- Ideal for Office, Retail Store, Showroom, Residential Applications and Damp Environment Lighting Applications



• 24W | 2000LM | LVD-36-MCT5-BN

• 32W | 2700LM | LVD-48-MCT5-BN


• 32W | 2700LM | LVD-48-MCT5-BN



Photometrics: LVD-WS-MCT5-BN



BUD Rating: B1-U3-G1

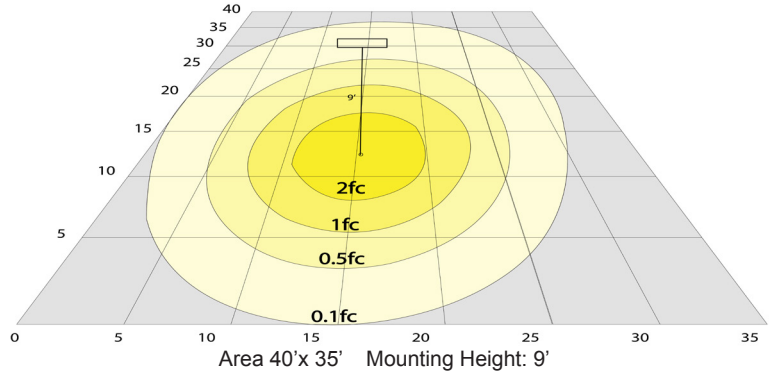

Other Views:



Side View



Back View

Performance Table: LVD-WS-MCT5-BN

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LVD-WS-MCT5-BN	16W	120V	1360LM	2700K 3000K 3500K 4000K 5000K	B1-U3-G1	85

Sample Ordering

Model Style Color Temp. Housing

LVD - WS - MCT5 - BN

OTHER MODEL: LVD-36-MCT5-BN



Side View



Front View



Back View

