

LVE SERIES Indoor Lighting



LVE-36-MCT-BN
36" MULTI-CCT VANITY LIGHTS



Customer Name: _____

Project Name: _____

Note: _____ Type: _____

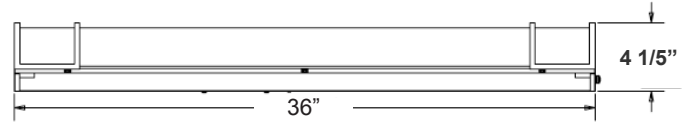

This is LED Vanity Model Ideal for office, Retail Store, Showroom, Residential applications and Damp environment lighting applications.

4 1/5"(H) x 36" (W) x 6"(D)

Features

- Steel base with white powder coated
- Finish: Brushed Nickel
- Durable Die-cast Aluminum
- Lens Type: Polycarbonate Lens
- MCT: Multi Color Temperature (Selectable Switch Inside Fixture)

Technical Specifications

Electrical:

- Voltage: 120 V AC 50/60Hz
- Wattage: 25W
- Power Factor: >0.95
- Total Harmonic Distortion: ≤ 20 %
- Efficacy: 102 LPW

Mechanical:

- Steel Base With White Powder Coated
- Finish: Brushed Nickel
- Durable Die-cast Aluminum
- Lens Type: Polycarbonate Lens
- Suitable for Damp Location
- Operating Temperature: -22°F to 104°F

Lighting:

- Dimming: TRIAC Dimming (Dimmable Down to 5% Compatible with Traic and ELV Dimmers)
- 120V Dimming Quantum Driver
- Total Lumens: 2560LM
- Color Temperatures: 3000K / 3500K / 4000K
- Multi-CCT(Selectable Switch Inside Fixture)
- Color Rendering Index: CRI ≥ 90
- 50,000 Hours Rated Life
- 5-Year Warranty
- Beam Angle: 104.8°(H) x 100.5°(V)

Applications:



- Ideal for Office, Retail Store, Showroom, Residential Applications and Damp Environment Lighting Applications

Other models:


- 17W | 1760LM | LVE-24-MCT-BN
- 34W | 3500LM | LVE-48-MCT-BN



Photometrics: LVE-36-MCT-BN



BUD Rating: B1-U3-G1

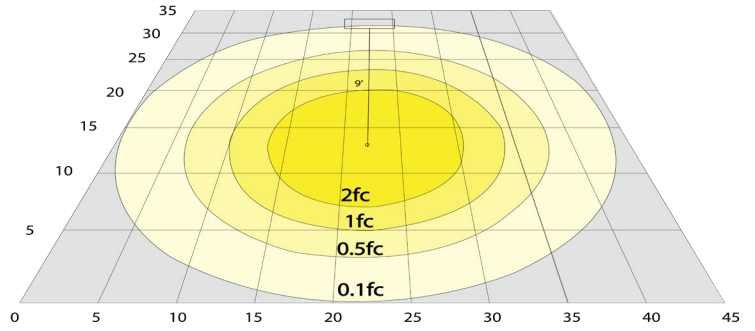

Area 35'x 45' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: LVE-36-MCT-BN

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LVE-36-MCT-BN	25W	120V	2560LM	3000K 3500K 4000K	B1-U3-G1	102

Sample Ordering

Model **Size** **Color Temp.** **Housing**


LVE - 36 - MCT - BN

Example:

1. LVE-36-MCT-BN

(For LVE 25W MCT fixture 120V)

Other Model: LVE-24-MCT-BN



Side View



Front View



Back View