
LVE SERIES Indoor Lighting

LVE-48-MCT-BN

48" MULTI-CCT VANITY LIGHTS



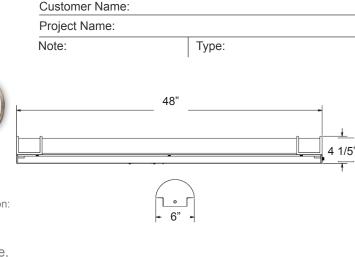

4 1/5"(H) x48" (W) x 6"(D)



Selection:



Features

- Steel base with white powder coated
- Finish: Brushed Nickel
- Durable Die-cast Aluminum

- Lens Type: Polycarbonate Lens
- MCT: Multi Color Temperature (Selectable Switch Inside Fixture)

Technical Specifications

Electrical:

Voltage: 120 V AC 50/60Hz

Wattage: 34WPower Factor: >0.95

Total Harmonic Distortion: ≤ 20 %

Efficacy: 102 LPW

Mechanical:

- Steel Base With White Powder Coated
- Finish: Brushed Nickel
- Durable Die-cast Aluminum
- Lens Type: Polycarbonate Lens
- Suitable for Damp Location
- Operating Temperature: -22°F to 104°F

Lighting:

- Dimming: TRIAC Dimming (Dimmable Down to 5% Compatible with Traic and ELV Dimmers)
- 120V Dimming Quantum Driver
- Total Lumens: 3500LM
- Color Temperatures: 3000K / 3500K / 4000K
- Multi-CCT(Selectable Switch Inside Fixture)
- Color Rendering Index: CRI ≥ 90
- 50,000 Hours Rated Life
- 5-Year Warranty
- Beam Angle: 104.8°(H) x 100.5°(V)

Applications:

 Ideal for Office, Retail Store, Showroom, Residential Applications and Damp Environment Lighting Applications

Other models:

• 17W | 1760LM | LVE-24-MCT-BN

• 25W | 2560LM | LVE-36-MCT-BN














Other Views:



Performance Table: LVE-48-MCT-BN

| MODEL NO. | Wattage | Voltage | Lumens | Color Temp. | BUG Rating | LPW |
|---------------|---------|---------|--------|-------------------------|------------|-----|
| LVE-48-MCT-BN | 34W | 120V | 3500LM | 3000K 3500K 4000K | B1-U3-G1 | 102 |

Sample Ordering



Example:

1. LVE-48-MCT-BN

(For LVE 34W MCT fixture 120V)

Other Model: LVE-36-MCT-BN



Side View Front View Back View