

# LVO SERIES Indoor Lighting

LVO-24-MCT5-BN

OVAL-BACK 360° MODERN VANITY



**MCT** Multi Color Temperature (Selectable)

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

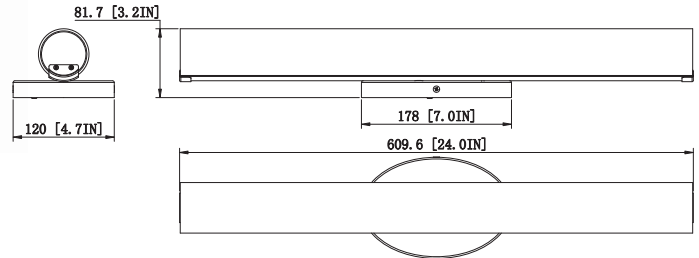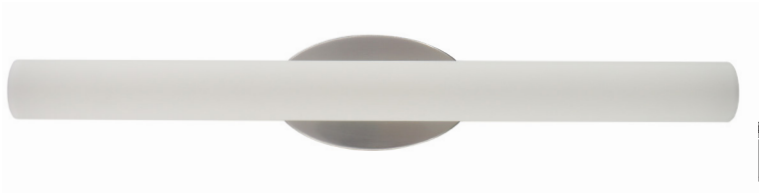

This is LED Vanity Model Ideal for office, Retail Store, Showroom, Residential applications and Damp environment lighting applications.

**24"(W) x 3.2"(H) x 4.7"(D)**

## Features

- Corrosion and Heat Resistance Powder Coated
- Finish: Brushed Nickel
- Durable Die-cast Aluminum
- Lens Type: Polycarbonate Lens
- MCT: Multi Color Temperature (Selectable Switch Inside Fixture)

## Technical Specifications

### Electrical:

- Voltage: 120V AC 50/60Hz
- Wattage: 24W
- Power Factor: >0.95
- Total Harmonic Distortion: ≤ 20 %
- Efficacy: 870 LPW

### Mechanical:

- Corrosion and Heat Resistance Powder Coated
- Finish: Brushed Nickel
- Durable Die-cast Aluminum
- Lens Type: Polycarbonate Lens
- IP20, Indoor Use only
- Operating Temperature: -22°F to 104°F

### Lighting:



- Dimming: TRIAC Dimming (Dimmable Down to 5% Compatible with Traic and ELV Dimmers)
- Total Lumens: 1680LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Multi-CCT(Selectable Switch Inside Fixture)
- Color Rendering Index: CRI ≥ 90
- 50,000 Hours Rated Life
- 5-Year Warranty
- Beam Angle: 104.8°(H) x 100.5°(V)

### Applications:


- Ideal for Office, Retail Store, Showroom, Residential Applications and Damp Environment Lighting Applications



**Photometrics:** LVO-24-MCT5-BN

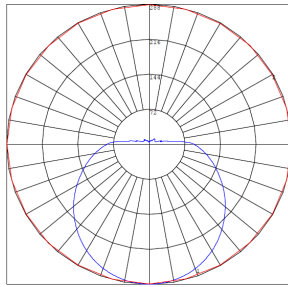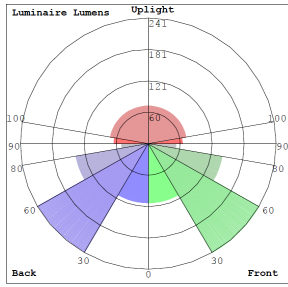

BUD Rating: B1-U3-G1

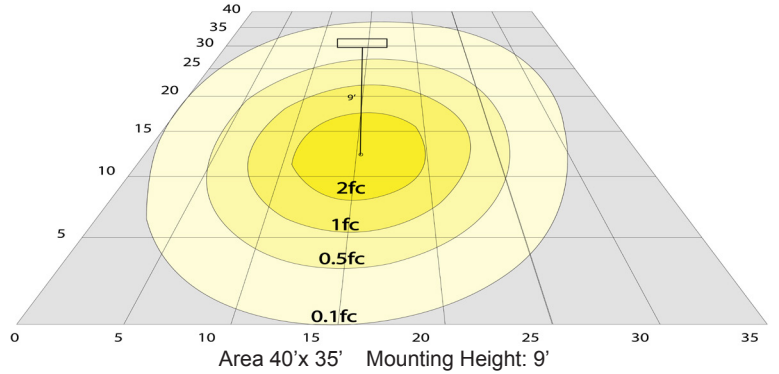

**Other Views:**



Side View



Front View



Back View

**Performance Table:** LVO-24-MCT5-BN

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LVO-24-MCT5-BN	24W	120V	1680LM	2700K 3000K 3500K 4000K 5000K	B1-U3-G1	70

**Sample Ordering**

**Model    Size    Color Temp.    Housing**

LVO - 24 - MCT5 - BN

**OTHER MODEL:** LVO-18-MCT5-BN



Side View



Front View



Back View

