

LVO SERIES Indoor Lighting

LVO-36-MCT5-BN

OVAL-BACK 360° MODERN VANITY

MCT Multi Color Temperature (Selectable)



WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

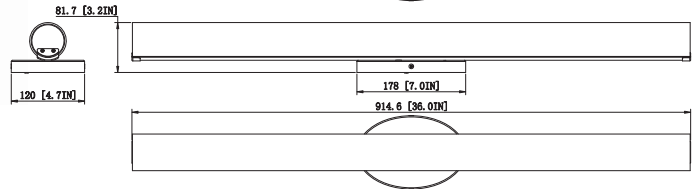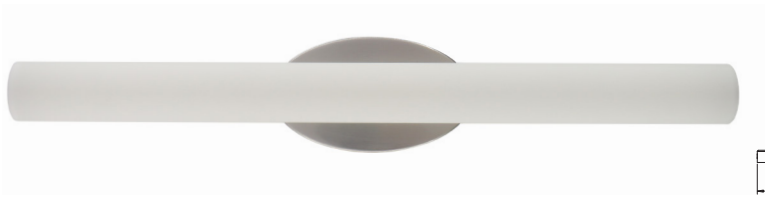

This is LED Vanity Model Ideal for office, Retail Store, Showroom, Residential applications and Damp environment lighting applications.

36"(W) x 3.2"(H) x 4.7"(D)

Features

- Corrosion and Heat Resistance Powder Coated
- Finish: Brushed Nickel
- Durable Die-cast Aluminum
- Lens Type: Polycarbonate Lens
- MCT: Multi Color Temperature (Selectable Switch Inside Fixture)

Technical Specifications

Electrical:

- Voltage: 120V AC 50/60Hz
- Wattage: 36W
- Power Factor: >0.95
- Total Harmonic Distortion: ≤ 20 %
- Efficacy: 870 LPW

Mechanical:

- Corrosion and Heat Resistance Powder Coated
- Finish: Brushed Nickel
- Durable Die-cast Aluminum
- Lens Type: Polycarbonate Lens
- IP20, Indoor Use only
- Operating Temperature: -22°F to 104°F

Lighting:

- Dimming: TRIAC Dimming (Dimmable Down to 5% Compatible with Traic and ELV Dimmers)
- Total Lumens: 2520LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Multi-CCT(Selectable Switch Inside Fixture)
- Color Rendering Index: CRI ≥ 90
- 50,000 Hours Rated Life
- 5-Year Warranty
- Beam Angle: 104.8°(H) x 100.5°(V)

Applications:

- Ideal for Office, Retail Store, Showroom, Residential Applications and Damp Environment Lighting Applications





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |




WG-02112025

Photometrics: LVO-36-MCT5-BN

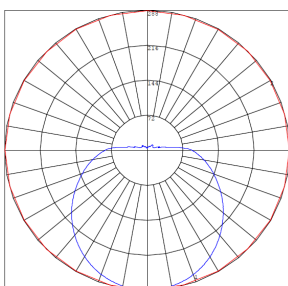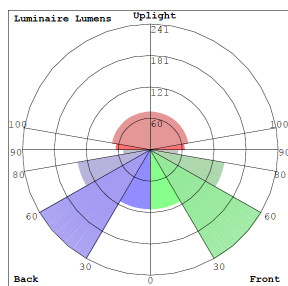

BUD Rating: B1-U3-G1

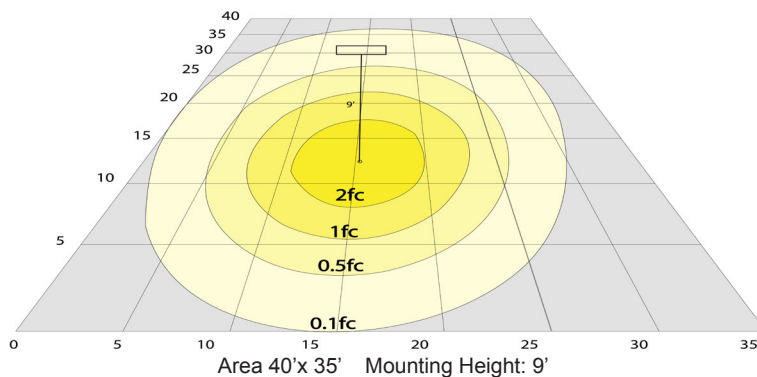

Other Views:



Side View



Front View



Back View

Performance Table: LVO-36-MCT5-BN

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LVO-36-MCT5-BN	36W	120V	2520LM	2700K 3000K 3500K 4000K 5000K	B1-U3-G1	70

Sample Ordering

Model	Size	Color Temp.	Housing
LVO	36	MCT5	BN

OTHER MODEL: LVO-18-MCT5-BN



Side View



Front View



Back View

