

LVC SERIES Indoor Lighting



LVP-18-MCT5-BK
LVP-18-MCT5-BN
18" MULTI-CCT VANITY LIGHTS

MCT5 Multi Color Temperature (Selectable)

Customer Name: _____

Project Name: _____

Note: _____ Type: _____

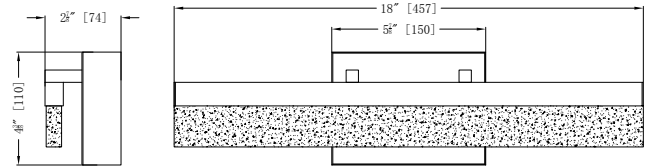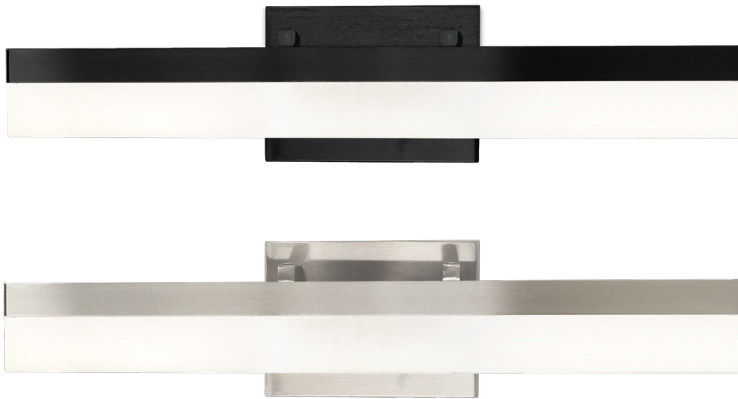

Avail Finishes:



18"(W) x 4 3/8"(H) 2 7/8"(D)

This is LED Vanity Model Ideal for office, Retail Store, Showroom, Residential applications and Damp environment lighting applications.

Features

- Corrosion and Heat Resistance Powder Coated
- Finish: Brushed Nickel
- Durable Die-cast Aluminum
- Lens Type: Polycarbonate Lens
- MCT: Multi Color Temperature (Selectable Switch Inside Fixture)

Technical Specifications

Electrical:

- Voltage: 120V AC 50/60Hz
- Wattage: 20W
- Power Factor: >0.95
- Total Harmonic Distortion: ≤ 20 %
- Efficacy: 70 LPW

Mechanical:

- Corrosion and Heat Resistance Powder Coated
- Finish: Brushed Nickel
- Durable Die-cast Aluminum
- Lens Type: Polycarbonate Lens
- IP20, Suitable for Damp Location
- Operating Temperature: -22°F to 104°F

Lighting:



- Dimming: TRIAC Dimming (Dimmable Down to 5% Compatible with Traic and ELV Dimmers)
- Total Lumens: 1400LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Multi-CCT(Selectable Switch Inside Fixture)
- Color Rendering Index: CRI ≥ 90
- 50,000 Hours Rated Life
- 5-Year Warranty
- Beam Angle: 104.8°(H) x 100.5°(V)

Applications:


- Ideal for Office, Retail Store, Showroom, Residential Applications and Damp Environment Lighting Applications



Photometrics: LVP-18-MCT5



BUD Rating: B1-U3-G1

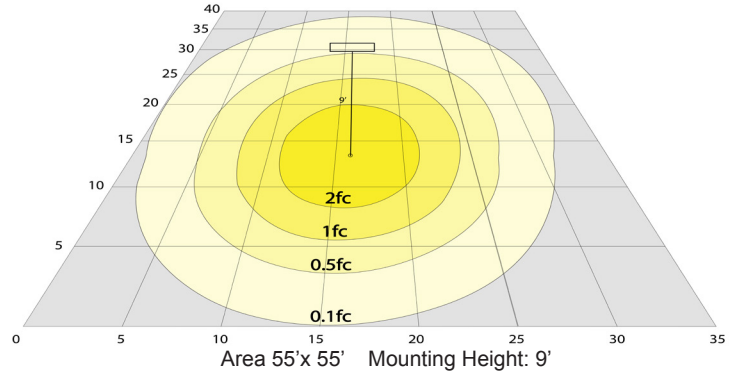

Performance Table: LVP-18-MCT5-BN

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LVP-18-MCT5-BK LVP-18-MCT5-BN	20W	120V	1400LM	2700K 3000K 3500K 4000K 5000K	B1-U3-G1	70

Sample Ordering

Model Size Color Temp. Housing

LVP - 18 - MCT5 -

BK = Black
BN = Brushed Nickel