LVS SERIES Indoor Lighting

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Type:

LVS-36-MCT5-BB

SLIM ROTATABLE VANITY LIGHTS AND SCONCES



36" 6"

This is LED Vanity Model Ideal for office, Retail Store, Showroom, Residential applications and Damp environment lighting applications.

36"(W) x 4"(H)

Features

- Corrosion and Heat Resistance Powder Coated
- Finish: Brushed Brass
- Durable Die-cast Aluminum

Lens Type: Polycarbonate Lens

Customer Name: Project Name:

Note:

 MCT: Multi Color Temperature (Selectable Switch Inside Fixture)

Technical Specifications

Electrical:

Voltage: 120V AC 50/60Hz

Wattage: 30WPower Factor: >0.95

• Total Harmonic Distortion: ≤ 20 %

Efficacy: 70 LPW

Mechanical:

- Corrosion and Heat Resistance Powder Coated
- Finish: Brushed Brass
- Durable Die-cast Aluminum
- 180-Degree Rotatable Light Bars
- Operating Temperature: -22°F to 104°F
- IP20, Suitable for Damp Location
- 5-Year Warranty

Lighting:

- Multi-CCT(Selectable Switch Inside Fixture)
- Lens Type: Polycarbonate Lens
- Dimming: TRIAC Dimming (Dimmable Down to 5% Compatible With Traic and ELV Dimmers)
- Total Lumens: 2100LM
- Color Temperatures: 2700K/ 3000K/3500K/4000K/5000K
- Color Rendering Index: CRI ≥ 90
- 50,000 Hours Rated Life
- Beam Angle: 104.8°(H) x 100.5°(V)

Applications:

 Ideal for Office, Retail Store, Showroom, Residential Applications and Damp Environment Lighting Applications

Other Models:

• 30W | 2100LM | LVS-36-MCT5-BN • 30W | 2100LM | LVS-36-MCT5-BK











Photometrics: LVS-36-MCT5-BB



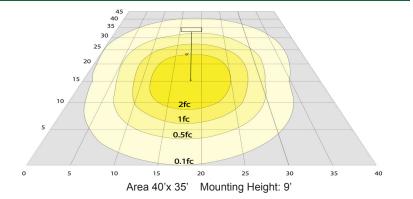

Other Views:







Performance Table: LVS-36-MCT5-BB

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LVS-36-MCT5-BB	30W	120V	2100LM	2700K 3000K 3500K 4000K 5000K	B1-U3-G1	70

Sample Ordering

Model Size Color Temp. Housing

LVS = 36 = MCT5 = BB

Example:

1. LVS-36-MCT5-BB

(For LVS 30W MCT5 fixture 120V)

Other Model:





LVS-36-MCT5-BK LVS-36-MCT5-BK