
# LVS SERIES Indoor Lighting



LVS-48-MCT5-BN

SLIM ROTATABLE VANITY LIGHTS AND SCONCES

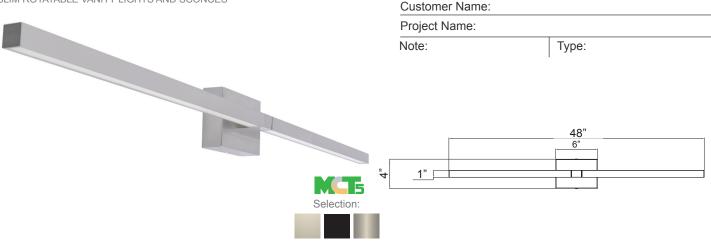

This is LED Vanity Model Ideal for office, Retail Store, Showroom, Residential applications and Damp environment lighting applications.

48"(W) x 4"(H)

## **Features**

- Corrosion and Heat Resistance Powder Coated
- Finish: Brushed Nickel
- Durable Die-cast Aluminum

- Lens Type: Polycarbonate Lens
- MCT: Multi Color Temperature (Selectable Switch Inside Fixture)

## **Technical Specifications**

#### **Electrical:**

Voltage: 120V AC 50/60Hz

Wattage: 40WPower Factor: >0.95

Total Harmonic Distortion: ≤ 20 %

Efficacy: 70 LPW

#### Mechanical:

- Corrosion and Heat Resistance Powder Coated
- Finish: Brushed Nickel
- Durable Die-cast Aluminum
- 180-Degree Rotatable Light Bars
- Operating Temperature: -22°F to 104°F
- IP20, Suitable for Damp Location
- 5-Year Warranty

## Lighting:

- Multi-CCT(Selectable Switch Inside Fixture)
- Lens Type: Polycarbonate Lens
- Dimming: TRIAC Dimming (Dimmable Down to 5% Compatible With Traic and ELV Dimmers)
- Total Lumens: 2800LM
- Color Temperatures: 2700K/ 3000K/3500K/4000K/5000K
- Color Rendering Index: CRI ≥ 90
- 50,000 Hours Rated Life
- Beam Angle: 104.8°(H) x 100.5°(V)

## **Applications:**

 Ideal for Office, Retail Store, Showroom, Residential Applications and Damp Environment Lighting Applications

#### Other Models:

• 40W | 2800LM | LVS-48-MCT5-BK • 40W | 2800LM | LVS-48-MCT5-BB











#### Photometrics: LVS-48-MCT5-BN



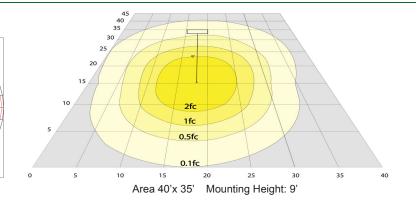

## **Other Views:**







## Performance Table: LVS-48-MCT5-BN

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LVS-48-MCT5-BN	40W	120V	2800LM	2700K 3000K 3500K 4000K 5000K	B1-U3-G1	70

# Sample Ordering

Model Size Color Temp. Housing

LVS = 48 = MCT5 = BN

### **Example:**

1. LVS-48-MCT5-BN

(For LVS 40W MCT5 fixture 120V)

## **Other Model:**



LVS-48-MCT5-BK LVS-48-MCT5-BB