

LVTE SERIES

Industrial Lighting

LVTE-4FT-30-60W-MCTP

MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)



Suitable for restaurants, bakeries, food facilities, gyms, pool areas, workshops, garages, canopies, parking garages, cold storage facilities, food processing facilities, farmyards, and other harsh, humid, dusty, and wet environment lighting applications, and any application where NSF certified fixtures or high-end architectural designer grade fixtures are required.

NSF/ANSI 2:2015 Food Equipment: Splash Zone: Equipment surfaces that are subject to splash and food spillage during operation of the equipment other than those in a direct contact food-zone.

Features

- LED Linear Vapor Light
- Grey Finish
- 5-Year Warranty
- 50,000 Hours Rated Life
- Lens: Opal Polycarbonate
- Vandal-Proof Polycarbonate Lens
- MCT: Multi Color Temperature & Power (Selectable Switch Inside Fixture)

Technical Specifications

Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 30W/45W/60W
- Power Factor: >0.9
- Efficacy: 140LM/W

Mechanical:

- Grey Finish
- Housing: Polycarbonate
- NSF Certified: NSF/ANSI 2 - Food Equipment. for Splash Zone and Non Food Zone
- Vandal-Proof Polycarbonate Lens
- 1/2" NPT knockout on both ends. Liquid Tight Cord Connectors Incl.
- Polycarbonate Construction Highly Impacts Resistant
- UV-Stabilized Polycarbonate Diffuser Eliminates Glare
- Diffuser Crystals Enhance Even Light Distribution
- Stainless Steel Clips Evenly Seal The Luminaires
- Stainless Steel Clamp
- Operating Temp: -25.6°F to 104°F
- Suitable For Wet Locations
- IP Rating: IP66


WESTGATE

THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____ Type: _____



46 2/3"(W) x 4 1/4"(H) x 3 1/4"(D)

Lighting:

- Dimmable: 0~10V Dimming
- LED SMD Type: 2835
- Total Lumens: 8400LM
- Multi-CCT & Power (Selectable Switch Inside Fixture)
- Color Temperatures: 3500K/4000K/5000K
- Color Rendering Index: CRI ≥ 80

Applications:

- Ideal for offices, retail stores, showrooms, and residential applications. Uniquely suited for areas where accessing the fixture is challenging.
- Suitable for restaurants, bakeries, food facilities, gyms, pool areas, and any application where NSF certified fixtures or high-end architectural designer grade fixtures are required.
- NSF/ANSI 2:2015 Food Equipment: Splash Zone: Equipment surfaces that are subject to splash and food spillage during operation of the equipment other than those in a direct contact food-zone.




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |





WG-07102023

Photometrics: LVTE-4FT-30-60W-MCTP



BUG Rating: B2-U3-G2

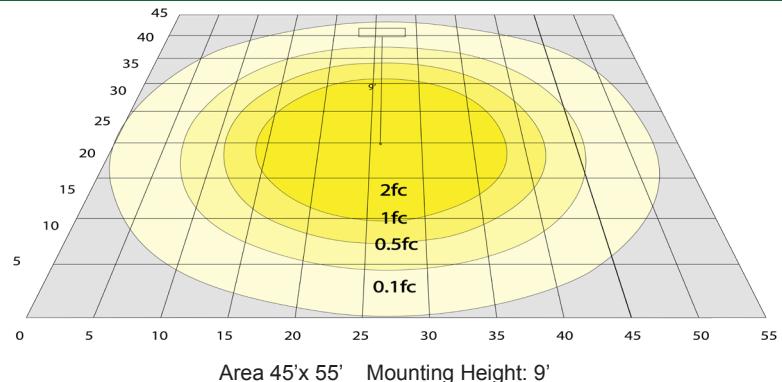

Area 45' x 55' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: LVTE-4FT-30-60W-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LVTE-4FT-30-60W-MCTP	30W	120~277V	4200LM	3500K		
	45W		6300LM	4000K	B2-U3-G2	
	60W		8400LM	5000K		140

Sample Ordering

Model Size Wattage Color Temp.
 LVTE - 4FT - 30 - 60W - MCTP

SENSOR AND EMERGENCY BATTERY BACK UP OPTIONS:



OPT-HBC-125SB-WH

OPT-HBC-125TL-WH

OPT-HBC-277TL-WH



OPT-SEN-2MDR-36

OPT-EM-CM1INT



WEC-3RC

Factory-Installed Options:



Blank = No Option For Accessories

OPT-EM-CM1INT= INTERNAL EMERGENCY BACKUP BATTERY

OPT-HBC-125TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 125V, WHITE

OPT-HBC-277TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 277V, WHITE

OPT-HBC-125SB-WH = STRAIGHT BLADE PLUG 10FT, 15A,125V, 3-CONDUCTOR 18AWG,WHITE

OPT-SEN-2MDR-36=PROGRAMMABLE MICROWAVE BI-LEVEL SENSOR

WEC-3RC=OPTIONAL REMOTE CONTROL

