# LVTT SERIES MCTP

VAPOR LIGHTING

LVTT-2FT-15-30W-MCTP-SR
2FT LED Round Vapor Tight Selectable Power & CCT | Sensor-Ready

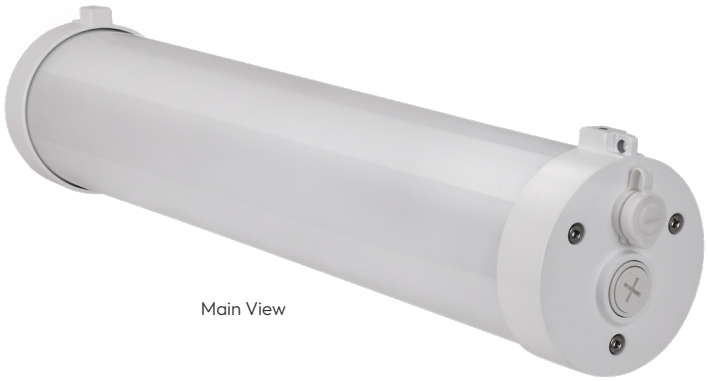

Main View



Side View



Side View
Shown with Surface-Mounting Kit With Two Brackets - Not Incl.



Shown with Pigtail Accessory - Not Incl.



Shown with Surface-Mounting Kit With Two Brackets - Not Incl.

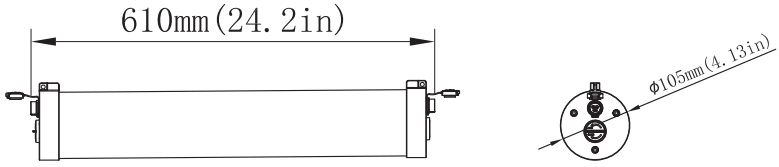


Technical Drawing: 4.13" (D) x 24.2" (W) x 4.13" (H)

The LVTT-2FT-15-30W-MCTP-SR is a compact round LED vapor tight fixture designed for demanding wet, dusty, and washdown environments. With selectable wattage, selectable CCT, high-efficacy output, and sensor-ready construction, it provides flexible performance for industrial, food processing, refrigeration, garage, and utility applications. Its IP69K-rated housing, impact-resistant polycarbonate lens, and aluminum die-cast endcaps support long-lasting performance in harsh operating conditions.

Customer Name:

Project Name:

Note: | Type:

FEATURES:

- Selectable power and CCT for field flexibility
- Sensor-ready design with pre-installed DC sensor base
- IP69K construction for demanding wet and washdown applications
- High-output 360° illumination
- Impact-resistant lens for industrial environments
- NSF approval, ideal for food industry applications
- Suitable for food/beverage factories, heavy manufacturing, garages, refrigerated storage rooms, and fishing boats

## SPECIFICATIONS:

ELECTRICAL:

- Voltage: 120-347VAC
- Selectable Wattage: 15W / 20W / 25W / 30W
- Dimmable driver
- Pre-installed DC sensor base
- Operating Temperature: -4°F to 122°F

MECHANICAL:

- Length: 2FT
- Dimensions: 24.0" x 3.9"
- Aluminum alloy die-cast endcaps
- Dust-tight and waterproof construction
- IP69K rated
- Surface mount or suspended installation
- Standard 6FT and 1FT cable
- Mounting bracket included
- Hanging cable included

LIGHTING:

- Selectable CCT: 3500K/4000K/5000K
- Efficacy: >130 LM/W
- CRI: >80
- Beam Angle: 360°
- Impact-resistant polycarbonate lens

APPLICATIONS:

- Parking garages and parking structures.
- Industrial facilities and warehouses.
- Car washes and maintenance bays.
- Utility rooms, tunnels, and service corridors.
- Food-processing and cold-storage areas.
- Outdoor covered walkways and loading docks.



Phone/Fax: (877) 805-2252
www.westgatemfg.com

# PERFORMANCE TABLE

| MODEL NO. | WATTAGE | LUMEN | COLOR TEMP. | LPW |
|---|---|---|---|---|
| LVTT-2FT-15-30W-MCTP-SR | 15W/20W/25W/30W | 1950<br>2600<br>3250<br>3900 | 3500K<br>4000K<br>5000K | 130LM/W |

NOTES

- Fixture requires either suspension cables or the surface-mounting bracket listed in the accessories.
- Fixture requires a pigtail power cable to power the fixture.
- Jumper cable is required when coupling or connecting multiple fixtures together.

# ACCESSORIES

| MODEL NO. | DESCRIPTION | IMAGE |
|---|---|---|
| LVTT-JUMP-6FT | Jumper cable with connectors on both ends, 6FT |  |
| LVTT-JUMP-12FT | Jumper cable with connectors on both ends, 12FT | |
| LVTT-PTAIL-6FT | Pigtail Power Cable With Connector On One End FT | |
| LVTT-PTAIL-12FT | Pigtail Power Cable With Connector On One End 12FT | |
| LVTT-SMK | Surface-Mounting Kit With Two Brackets |  |
| WEC-3PR-78-AJ-WH | PIR Sensor 1-Pin Audio Jack Contact 600W 40Ft 120-277V 0-10V Bi-Level & RC (Optional RC WEC-3RC) |  |
| WEC-AJ-SA | 12-24Vdc Swivel Arm For 3.5Mm Plug-In 1-Pin Audio-Jack Sensors | |
| SCL-GS220 | Heavy-Duty Adjustable 5/64" 20 Ft.<br>Suspension Kit With Loop Gripper & Hook (1) |  |
| SCL-GS210 | Heavy-Duty Adjustable 5/64" 10 Ft.<br>Suspension Kit With Loop Gripper & Hook (1) |  |