
LVTT SERIES MCTP

VAPOR LIGHTING

LVTT-2FT-15-30W-MCTP-SR
2FT LED Round Vapor Tight Selectable Power & CCT | Sensor-Ready



Main View

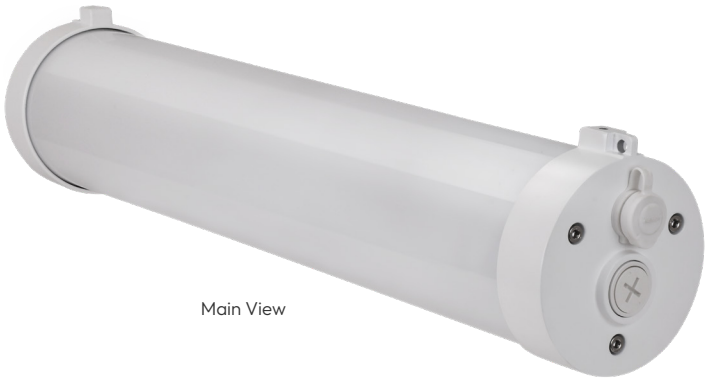

Side View




Side View
Shown with Surface-Mounting Kit With Two Brackets - Not Inlc.



Shown with Pigtail Accessory - Not Inlc.



Shown with Surface-Mounting Kit With Two Brackets - Not Inlc.

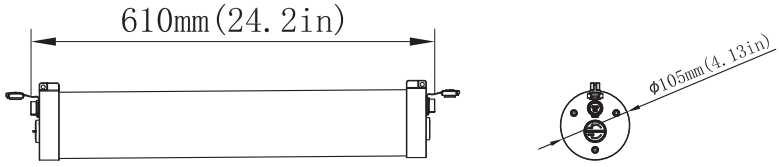

Technical Drawing: 4.13" (D) x 24.2" (W) x 4.13" (H)

The LVTT-2FT-15-30W-MCTP-SR is a compact round LED vapor tight fixture designed for demanding wet, dusty, and washdown environments. With selectable wattage, selectable CCT, high-efficacy output, and sensor-ready construction, it provides flexible performance for industrial, food processing, refrigeration, garage, and utility applications. Its IP69K-rated housing, impact-resistant polycarbonate lens, and aluminum die-cast endcaps support long-lasting performance in harsh operating conditions.

Customer Name:

Project Name:

Note: | Type:

FEATURES:
- Selectable power and CCT for field flexibility
- Sensor-ready design with pre-installed DC sensor base
- IP69K construction for demanding wet and washdown applications
- High-output 360° illumination
- Impact-resistant lens for industrial environments
- NSF approval, ideal for food industry applications
- Suitable for food/beverage factories, heavy manufacturing, garages, refrigerated storage rooms, and fishing boats

SPECIFICATIONS:

ELECTRICAL:
- Voltage: 120-347VAC
- Selectable Wattage: 15W / 20W / 25W / 30W
- Dimmable driver
- Pre-installed DC sensor base
- Operating Temperature: -4°F to 122°F

MECHANICAL:
- Length: 2FT
- Dimensions: 24.0" x 3.9"
- Aluminum alloy die-cast endcaps
- Dust-tight and waterproof construction
- IP69K rated
- Surface mount or suspended installation
- Standard 6FT and 1FT cable
- Mounting bracket included
- Hanging cable included

LIGHTING:
- Selectable CCT: 3500K/4000K/5000K
- Efficacy: >130 LM/W
- CRI: >80
- Beam Angle: 360°
- Impact-resistant polycarbonate lens

APPLICATIONS:
- Parking garages and parking structures.
- Industrial facilities and warehouses.
- Car washes and maintenance bays.
- Utility rooms, tunnels, and service corridors.
- Food-processing and cold-storage areas.
- Outdoor covered walkways and loading docks.

Phone/Fax: (877) 805-2252
www.westgatemfg.com

PERFORMANCE TABLE

MODEL NO.	WATTAGE	LUMEN	COLOR TEMP.	LPW
LVTT-2FT-15-30W-MCTP-SR	15W/20W/25W/30W	1950 2600 3250 3900	3500K 4000K 5000K	130LM/W

NOTES

- Fixture requires either suspension cables or the surface-mounting bracket listed in the accessories.
- Fixture requires a pigtail power cable to power the fixture.
- Jumper cable is required when coupling or connecting multiple fixtures together.

ACCESSORIES

MODEL NO.	DESCRIPTION	IMAGE
LVTT-JUMP-6FT	Jumper cable with connectors on both ends, 6FT	
LVTT-JUMP-12FT	Jumper cable with connectors on both ends, 12FT	
LVTT-PTAIL-6FT	Pigtail Power Cable With Connector On One End FT	
LVTT-PTAIL-12FT	Pigtail Power Cable With Connector On One End 12FT	
LVTT-SMK	Surface-Mounting Kit With Two Brackets	
WEC-3PR-78-AJ-WH	PIR Sensor 1-Pin Audio Jack Contact 600W 40Ft 120-277V 0-10V Bi-Level & RC (Optional RC WEC-3RC)	
WEC-AJ-SA	12-24Vdc Swivel Arm For 3.5Mm Plug-In 1-Pin Audio-Jack Sensors	
SCL-GS220	Heavy-Duty Adjustable 5/64" 20 Ft. Suspension Kit With Loop Gripper & Hook (1)	
SCL-GS210	Heavy-Duty Adjustable 5/64" 10 Ft. Suspension Kit With Loop Gripper & Hook (1)	