


# LVW SERIES Outdoor Lighting

LVW-210-UD-MCT-ORB  
12V LED MINI WALL SCONCE



Customer Name: \_\_\_\_\_  
Project Name: \_\_\_\_\_  
Note: \_\_\_\_\_ | Type: \_\_\_\_\_

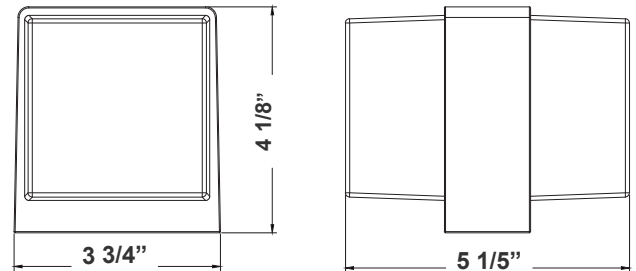

3 3/4"(W) x 4 1/8"(H) x 5 1/5"(D)

LED 12V mini wall light with double-walled clear/frosted lens is ideal for general site lighting, landscape canopies, doorway, pathway and parking areas.

## Features

- Back plate: Die-cast aluminum
- Polycarbonate Lens
- 3-Year Warranty
- Multi CCT Switch is Inside Fixture

## Technical Specifications

### Electrical:

- Voltage: 12V AC
- Wattage: 6W
- Power Factor: >0.90
- Efficacy: 66.7 LPW

### Mechanical:

- Back plate: Die-Cast Aluminum with Mounting/Gasket Installed
- Color: Oil-Rubbed Bronze
- Polycarbonate Lens
- Operating Temperature: -4°F to 104°F
- Wet Location
- 3-Year Warranty
- IP54

### Lighting:

- Multi CCT Switch is Inside Fixture
- Total Lumens: 400LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 90
- Beam Angle: 90° x 110°
- Rated life: 50,000 Hrs

### Applications:



- LED 12V mini wall light with double-walled clear/frosted lens is ideal for general site lighting, landscape canopies, doorway, pathway and parking areas.

## Other Models:


- 3W | 200LM | LVW-210-MCT-ORB



**Photometrics:** LVW-210-UD-MCT-ORB



BUD Rating: B0-U3-G0

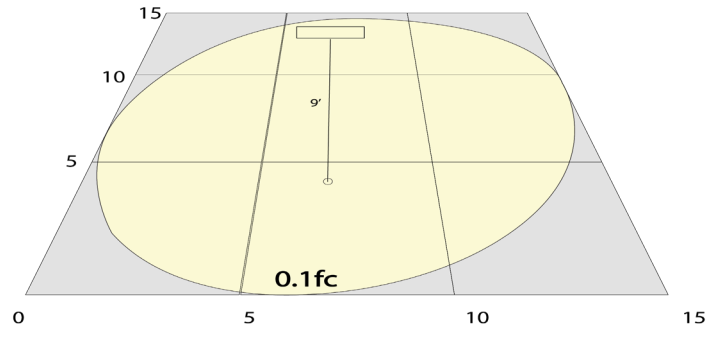

Area 15'x 15' Mounting Height: 9'

**Other Views:**



Side View



Front View



Back View

**Performance Table:** LVW-210-UD-MCT-ORB

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LVW-210-UD-MCT-ORB	6W	12V	400LM	3000K 4000K 5000K	B0-U3-G0	66.7

**Sample Ordering**

Model
Color Temp.
Housing

LVW - 
 210 - 
 UD - 
 MCT - 
 ORB

**Other Models:**



LVW-210-MCT-ORB

