


# LW360 SERIES Outdoor Lighting

LW360-25W-30K-G2  
LW360-25W-40K-G2  
LW360-25W-50K-G2

Customer Name: \_\_\_\_\_  
Project Name: \_\_\_\_\_  
Note: \_\_\_\_\_ | Type: \_\_\_\_\_

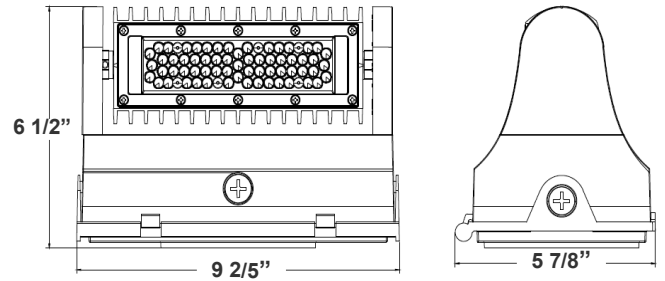

6 1/2"(H) x 9 2/5"(W) x 5 7/8"(L)

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

## Features

- Three 1/2" Threaded Knockouts: 1 Bottom. 1 On Each Side
- Light Head rotates 350°
- Die-cast aluminum housing with powder coat finish (Dark Bronze or White)
- 7-Year Warranty

## Technical Specifications

### Electrical:

- Voltage: 120-277V AC 50/60Hzv
- Wattage: 25W
- Power Factor: >0.95
- Efficacy: 130 LPW

### Mechanical:

- Die-Cast Aluminum With Powder Coat Finish (Dark Bronze)
- Light Head rotates 350°
- Includes Mounting Hardware
- Operating Temperature: -40°F -104°F
- Five 1/2" Threaded Knockouts: 1 on Each Side, 1 on The Back
- 7-Year Warranty
- IP65, Suitable for Wet Locations

### Lighting:

- TIR Optic Lens - TYPE II
- Dimmable: 0~10V Dimming
- Total Lumens: 3250LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 60°
- Rated life: 70,000 Hrs

### Applications:



- General site Lighting
- Alleys
- Loading docks
- Doorways
- Pathways
- Parking areas

### Other Models:


- 40W | 5200LM | LW360-40W-30K-G2
- 60W | 8100LM | LW360-60W-30K-G2
- 60W | 7800LM | LW360-60W-30K-G2
- 120W | 15600LM | LW360-120W-30K-G2
- 40W | 5200LM | LW360-40W-40K-G2
- 60W | 8100LM | LW360-60W-40K-G2
- 60W | 7800LM | LW360-60W-40K-G2
- 120W | 15600LM | LW360-120W-40K-G2
- 40W | 5200LM | LW360-40W-50K-G2
- 60W | 8100LM | LW360-60W-50K-G2
- 60W | 7800LM | LW360-60W-50K-G2
- 120W | 15600LM | LW360-120W-50K-G2



## Photometrics: LW360-25W

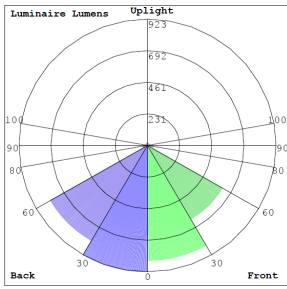

BUG Rating: B2-U2-G0

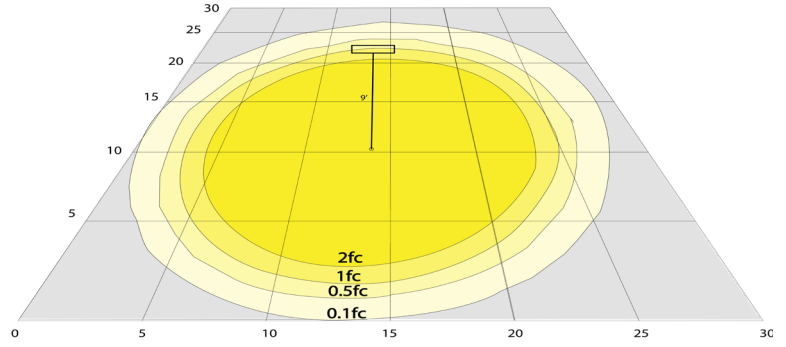

Area 30'x 30' Mounting Height: 9'

## Other Views:



Side View



Front View



Back View

## Performance Table: LW360-25W

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LW360-25W-30K-G2	25W	120~277V	3250LM	3000K	B2-U2-G0	130
LW360-25W-40K-G2			3250LM	4000K		
LW360-25W-50K-G2			3250LM	5000K		

## Sample Ordering

Model	Wattage	Color Temp.	Series
LW360	25W	<input type="text"/> 3000K 4000K 5000K	G2


## Accessory:

Blank = No Option For Accessories  
LW360-SH1= SHROUD FOR LW360 SERIES, BRONZE FINISH

## Factory-Installed Options:

Blank = No Option For Accessories  
OPT-EM-LW360= EMERGENCY BACKUP BATTERY, BACK BOX  
OPT-SEN-LW360-3MRLV-5= PROGRAMMABLE MICROWAVE BI-LEVEL  
OPT-CLR-85= COLOR PAINT  
OPT-LW360-PC-B = PHOTOCELL 120-277V  
WEC-8RC = OPTIONAL REMOTE

## ACCESSORY:



LW360-SH1

## FACTORY-INSTALLED OPTIONS:



OPT-EM-LW360-LG



WEC-8RC



OPT-LW360-PC-B



OPT-SEN-LW360-3MRLV-5



**COLOR CHART:** \* Choose from one of our Premium Colors with no set-up fee.

**Gloss:**



SILVER METALLIC  
70 GLOSS  
T357-GR105



SILVER METALLIC  
30 GLOSS  
T353-GR06



DARK RED 90  
GLOSS  
P009-RD02



INTERNATIONAL  
ORANGE 90  
GLOSS  
T009-OG26




SAFETY ORANGE  
90 GLOSS  
T009-OG01




YELLOW 90  
GLOSS  
T009-YL14



YELLOW 90  
GLOSS  
T009-YL01



TRAFFIC GREEN  
70 GLOSS  
T007-GN16



GREEN 70 GLOSS  
T007-GN13




GREEN 60 GLOSS  
C006-GN03



BLUE 90 GLOSS  
T009-BL01



DARK BLUE 80  
GLOSS  
T008-BL20



RAL 8028 TERRA  
BROWN 90 GLOSS  
C209-BR358

**Hammer:**




WHITE HAMMER  
T013-WH09



BEIGE HAMMER  
T013-BG38



GREY HAMMER  
C013-GR08




SILVER  
HAMMERTONE  
T064-GR05




BLACK HAMMER  
T013-BK62



RED HAMMER  
T013-RD15



GREEN HAMMER  
T013-GN220



BLUE HAMMER  
T013-BL468



BRONZE HAMMER  
T012-BR161

**Texture:**



WHITE TEXTURE  
C031-WH120



FLINT GRAY  
TEXTURE  
T243-GR522



BLACK TEXTURE  
C241-BK109



RED TEXTURE  
T241-RD129



BLUE TEXTURE  
C241-BL544



OIL RUBBED  
BRONZE TEXTURE  
T291-BR251


**Vein:**



BLACK/WHITE  
VEIN  
T075-WH34



SILVER VEIN  
T375-BK26



COPPER VEIN  
EXTERIOR  
T075-BK211



GOLD VEIN  
T375-BK10



COPPER VEIN  
T375-BK07

