

LW360 SERIES MCTP

ARCHITECTURAL OUTDOOR LIGHTING

LW360-60-120W-MCTP-PSR
 LW360-60-120W-MCTP-PSR-WH
 LW360-60-120W-MCTP-PSR-SIL
 LW360-60-120W-MCTP-PSR-BK

LED 360° ROTATABLE WALL PACK, PHOTOCELL, SENSOR-READY



Bronze




White



Black



Silver

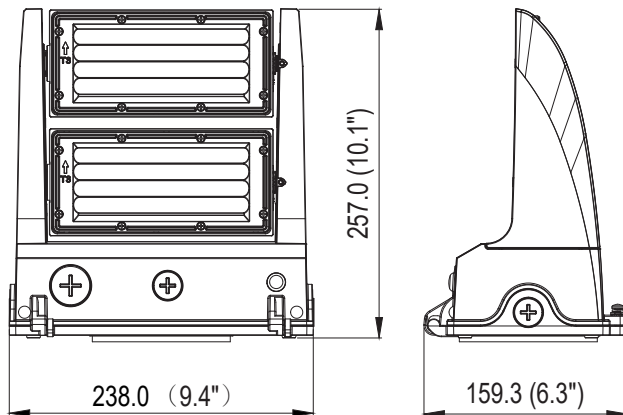

Technical Drawing: 6.3" (D) x 9.4" (W) x 10.1" (H)

The LW360-60-120W-MCTP-PSR Series is a high-output adjustable LED wall pack designed for commercial exterior applications requiring greater lumen output and coverage. Its dual-lens configuration delivers up to 18,000 lumens while providing four selectable wattages and selectable 3000K, 4000K or 5000K color temperature. An integrated dusk-to-dawn photocell, 0-10V dimming and adjustable lighting heads provide application flexibility, while the die-cast aluminum housing, IP65 construction and wet-location rating support demanding outdoor installations. Factory-installed emergency, sensor Compatible sensor accessories and an emergency-backup option are available for expanded control flexibility.

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

FEATURES:

- IP65 wet-location construction
- Polycarbonate lens ,High-output dual-lens design
- Adjustable light distribution
- Pre-installed dusk-to-dawn photocell with ON/OFF control
- Sensor-ready design
- Sensor sold separately
- 7-year warranty

SPECIFICATIONS:

ELECTRICAL:

- 120-277VAC, 50/60 Hz
- Selectable wattage: 60W / 80W / 100W / 120W
- 0-10V dimming
- Power factor: ≥ 0.90
- THD: $< 20\%$
- Integrated dusk-to-dawn photocell with ON/OFF selector
- Factory default setting: photocell ON, maximum wattage and 5000K
- Operating temperature: -40°F to 122°F
- Operating temperature with emergency backup: 32°F to 104°F
- Surge protection: 6kV line-to-neutral / 6kV line-to-ground
- Class 2 auxiliary output for compatible sensor controls

MECHANICAL:

- Die-cast aluminum housing
- Polycarbonate lens
- Dual-lens design
- IP65 rated
- Suitable for wet locations
- Wall mount only
- Toolless adjustable lighting head
- Adjustable head range: -15° to 210°
- Four 1/2" knockouts for installation
- Silicone-gasketed housing construction
- Bottom drain openings for moisture management
- Fixture dimensions: 9.4"W x 10.1"H x 6.3"D
- Fixture weight: 5.07 lb
- Available finishes: Bronze, Black, Silver and White


LIGHTING:

- 3CCT selectable: 3000K / 4000K / 5000K
- Lumen output: 9,000 / 12,000 / 15,000 / 18,000 lumens
- Up to 150 LM/W
- 80 CRI
- Type III light distribution
- SMD2835 LED technology
- Adjustable optical assembly for directional illumination
- 70,000-hour rated life

PERFORMANCE TABLE

MODEL NO.	WATTAGE	LUMEN	COLOR TEMP	LPW
LW360-60-120W-MCTP-PSR LW360-60-120W-MCTP-PSR-BK LW360-60-120W-MCTP-PSR-SIL LW360-60-120W-MCTP-PSR-WH	60W 80W 100W 120W	9000LM 12000LM 15000LM 18000LM	30K/40K/50K	150

ACCESSORIES

MODEL NO.	DESCRIPTION	IMAGE
OPT-EM-LW360-LG	Internal emergency backup	
OPT-CLR-85(BK/GR/SR/WH)	Powder-coat finish option	
OPT-CLR-MC	Custom color, setup fee per project	
WEC-3PR-78-AJ-WH WEC-3PBT-78-AJ-WH	PIR Sensor 1-Pin Audio Jack Contact 600W 40Ft 120-277V 0-10V Bi-Level Bluetooth App Ready	

MORE VIEWS



Bronze




White



Black



Silver



Bronze




White




Black




Silver




Bronze



White



Black



Silver