




LWA-20-WW
LWA-20-NW
LWA-20-CW

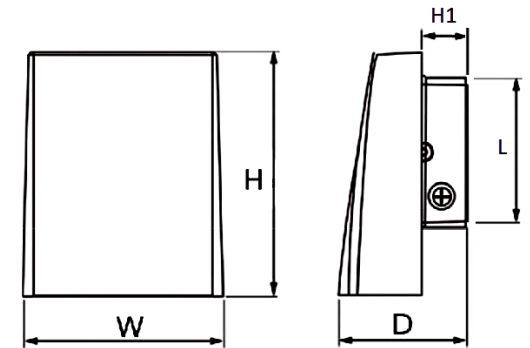

9"(W) x 12"(H) x 6"(D) x 2.70"(H1) x 5.25"(L)

LED CUTOFF & ADJUSTABLE WALL PACK

Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas. Great for use with motion sensors or other instant on/off controls.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 20W
- Input current: 0.3A Max
- Other wattages: 12W, 30W, 50W, 80W, 120W
- Power factor: >0.95

HOUSING SPECIFICATIONS:

- Die-cast aluminum with powder coat finish (Dark Bronze)
- Operating temperature: -4°F ~ 104°F
- Lifespan: 50000 Hrs.
- IP rating: IP65, Wet Locations
- High light transmittance, anti-UV and fire resistant PC lens

CERTIFICATIONS: UL, DLC



OPTIONAL ACCESSORIES:



MODEL	DESCRIPTION
LWA-SH2	shroud (Bronze) for LWA 20W

LIGHTING SPECIFICATIONS:

- LED type/brand: SMD 3030/ Philips Lumileds LEDs
- Total lumens: 2000 LM and 2200 LM
- Color temperature: 3000K/4000K/5000K
- Color rendering index: >80
- Beam angle: 80° x 100°

WARRANTY: 5 years

