




DIMENSIONS:

9"(W) x 12"(H) x 6"(D)

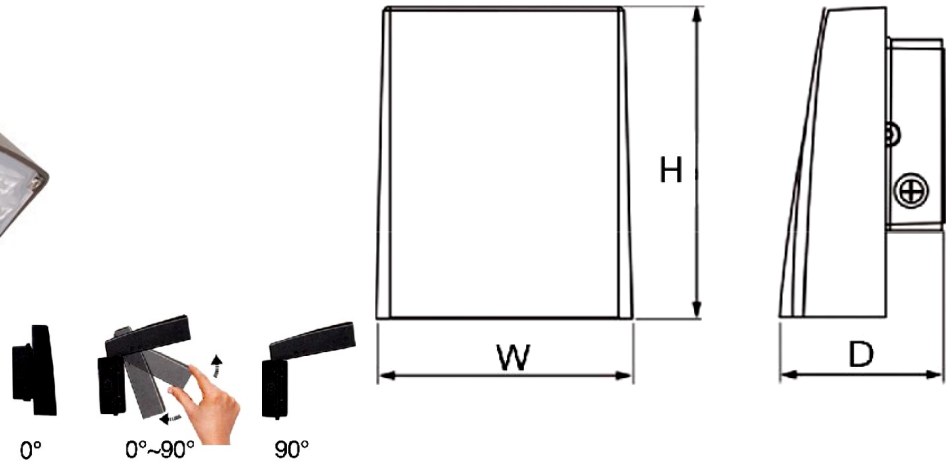

LWA-30-CW
LWA-30-NW
LWA-30-WW

LED CUTOFF & ADJUSTABLE WALL PACK

Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas. Great for use with motion sensors or other instant on/off controls.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 30W
- Input current: 0.38A Max
- Other wattages: 12W, 20W, 50W, 80W, 120W
- Power factor: >0.95

HOUSING SPECIFICATIONS:

- Die-cast aluminum with powder coat finish (Dark Bronze)
- Operating temperature: -4°F ~ 104°F
- Lifespan: 50000 Hrs.
- IP rating: IP65, Wet Locations
- High light transmittance, anti-UV and fire resistant PC lens

CERTIFICATIONS: UL, DLC



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LWA-30-CW	30W	120~277V AC	3200 LM	5000K
LWA-30-NW	30W	120~277V AC	3200 LM	4000K
LWA-30-WW	30W	120~277V AC	3000 LM	3000K

OPTIONAL ACCESSORIES:



MODEL	DESCRIPTION
LWA-SH2	shroud (Bronze) for LWA 30W

LIGHTING SPECIFICATIONS:

- LED type/brand: SMD 3030/ Philips Lumileds LEDs
- Total lumens: 3000 LM and 3200 LM
- Color temperature: 3000K /4000K/5000K
- Color rendering index: >80
- Beam angle: 80° x 100°

WARRANTY: 5 years

