LWAX SERIES Outdoor Lighting

LWAX-SM-12W-30K-P LWAX-SM-12W-40K-P LWAX-SM-12W-50K-P


GEN. 2 ADJUSTABLE WALL PACK, WATTAGE & CCT SELECT. WITH PHOTOCELL



Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas. Great for use with motion sensors or another instant on/off controls.



Customer Name:	
Project Name:	
Note:	Type:



5" (W) x 6" (H) x 4" (D)

Features

- High Light Transmittance, Anti-UV and Fire Resistant PC Lens
- Four 1/2" Knockouts: 1 Top. 1 on Each Side, 1 Back
- Die-Cast Aluminum With Powder Coat Finish (Dark Bronze)
- 7-Year Warranty

Technical Specifications

Electrical:

Voltage: 120-277VAC 60Hz

Wattage: 12WPower Factor: >0.95Efficacy: 125 LPW

Mechanical:

- Die-Cast Aluminum With Powder Coat Finish
- DC Button Photocell Included
- High Light Transmittance, Anti-UV and Fire Resistant Shatterproof PC Lens
- Light Head Can Be Adjusted From 0° to 90°
- Can Be Installed Facing Up (As An Uplight)
- Full Cutoff, Dark Sky Compliant
- Four 1/2" Knockouts: 1 Top. 1 on Each Side, 1 Back
- Operating Temperature: -4°F -104°F
- IP65 , Suitable for Wet Location
- 7-Year Warranty

Lighting:

- Dimming: 0~10V Dimmable
- Multi CCT and Power (Switches are inside fixture)
- The Type II Distribution is Used For Wide Walkways, On Ramps and Entrance Roadways, As Well As Other Long, Narrow Lighting
- Total Lumens: 1500LM
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam angle: 80° x 100°
 Rated life: 70,000 Hrs

Applications:

- · General site Lighting
- Allevs
- Loading docks
- Doorways
- Pathways
- Parking areas

Other Models:

- 12W | 1500LM | LWAX-SM-12W-30K-WH • 12W | 1500LM | LWAX-SM-12W-50K-WH
- 30W | 3900LM | LWAX-MD-30W-30K-P
- 30W | 3900LM | LWAX-MD-30W-40K-P
- 30W | 3900LM | LWAX-MD-30W-50K-P
















Photometrics: LWAX-SM-12W-P





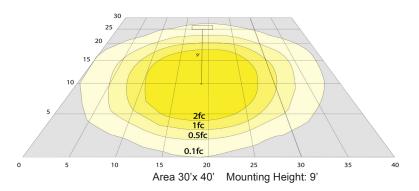

Other Views:







Side View

Front View

Performance Table: LWAX-SM-12W-P

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LWAX-SM-12W-30K-P	12W	120~277V	1500LM	3000K	B1-U2-G0	125
LWAX-SM-12W-40K-P				4000K		
LWAX-SM-12W-50K-P				5000K		

Sample Ordering

Model		Size		Wattage	Colo	r Temp.l	Photoce	II
LWAX	_	SM]_	12W	_	_	Р	1
			_			= 3000K		

50K = 5000K

Accessories:

Blank = No Option For Accessories

Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-FM10D = EXTERNAL EMERGENCY BACKUP BATTERY

OPT-SEN-3MRLV-5 = PROGRAMMABLE MICROWAVE BI-LEVEL

OPT-CLR-85 = COLOR PAINT

OPT-PC-B = BUTTON

OPT-TRS-T120 = TAMPER RESISTANT SCREW

WEC-8RC = OPTIONAL REMOTE

ACCESSORIES:



FACTORY-INSTALLED OPTIONS:



OPT-EM-FM10D (Shown with EM/Sensor extended box, can be painted)







OPT-PC-B

OPT-SEN-3MRLV-5

WEC-8RC



COLOR CHART: * Choose from one of our Premium Colors with no set-up fee.

Gloss:



SILVER METALLIC 70 GLOSS T357-GR105



SILVER METALLIC 30 GLOSS T353-GR06



DARK RED 90 **GLOSS** P009-RD02



INTERNATIONAL **ORANGE 90** GLOSS T009-OG26



SAFETY ORANGE 90 GLOSS T009-OG01



YELLOW 90 GLOSS T009-YL14



YELLOW 90 GLOSS T009-YL01



TRAFFIC GREEN 70 GLOSS T007-GN16



GREEN 70 GLOSS T007-GN13



GREEN 60 GLOSS C006-GN03



BLUE 90 GLOSS T009-BL01



DARK BLUE 80 GLOSS T008-BL20



RAL 8028 TERRA **BROWN 90 GLOSS** C209-BR358

Hammer:



WHITE HAMMER T013-WH09



BEIGE HAMMER T013-BG38



GREY HAMMER C013-GR08



SILVER HAMMERTONE T064-GR05



BLACK HAMMER T013-BK62



RED HAMMER T013-RD15



GREEN HAMMER T013-GN220



BLUE HAMMER T013-BL468



BRONZE HAMMER T012-BR161

Texture:



WHITE TEXTURE C031-WH120



FLINT GRAY **TEXTURE** T243-GR522



BLACK TEXTURE C241-BK109



RED TEXTURE T241-RD129



BLUE TEXTURE C241-BL544



OIL RUBBED **BRONZE TEXTURE** T291-BR251

Vein:



BLACK/WHITE VEIN T075-WH34



SILVER VEIN T375-BK26



COPPER VEIN **EXTERIOR** T075-BK211



GOLD VEIN T375-BK10

3



COPPER VEIN T375-BK07



