

WML-HL SERIES LED OUTDOOR LIGHTING

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

WML-HL-60W-30K
WML-HL-60W-40K
WML-HL-60W-50K




Customer Name: _____

Project Name: _____

Note: _____

Type: _____

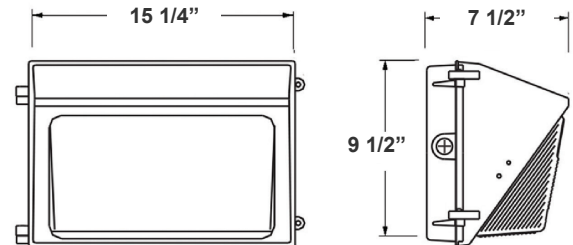

15 1/4"(W) x 9 1/2"(H) x 7 1/2"(D)

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

Features

- Die-Cast Aluminum with Powder Coat Finish (Dark Bronze), Optimized for LED
- Connect One End or Both Ends (Dual Function)
- 7-year warranty
- Prismatic Borosilicate Glass Lens
- High-Lumen, 145 L/W

Technical Specifications

Electrical:

- Input Wattage: 60W
- Input Voltage: 120-277VAC 50/60Hz
- Input current: 0.52A
- Power factor: >0.95
- Efficacy: 145 LPW

Mechanical:

- Die-cast aluminum with powder coat finish (Dark Bronze)
- Same Footprint as Traditional HID Wall Packs
- Four 1/2" Hubs: 1 top, 1 on Each Side, 1 Rear
- Mounting: Wall Mounting
- Operating Temperature: -4°F ~ 104°F
- Lifespan: 70000 Hrs.
- IP rating: IP65, Wet Locations

Lighting:

- Dimming: 0-10V Dimming
- Lens: Prismatic Borosilicate Glass Lens
- Chip: Philips Lumileds LEDs
- Total Lumens: 8700LM
- Color Temperature: 3000K/4000K/5000K
- CRI: >80

Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID wall packs
- Great for use with photocell

Other Models:

• 30W | 4200LM | MWL-HL-30W-30K • 50W | 7100LM | MWL-HL-50W-30K • 80W | 11600LM | MWL-HL-80W-30K • 100W | 14800LM | MWL-HL-100W-30K • 120W | 17100LM | MWL-HL-120W-30K
• 30W | 4200LM | MWL-HL-30W-40K • 50W | 7100LM | MWL-HL-50W-40K • 80W | 11600LM | MWL-HL-80W-40K • 100W | 14800LM | MWL-HL-100W-40K • 120W | 17100LM | MWL-HL-120W-40K
• 30W | 4200LM | MWL-HL-30W-50K • 50W | 7100LM | MWL-HL-50W-50K • 80W | 11600LM | MWL-HL-80W-50K • 100W | 14800LM | MWL-HL-100W-50K • 120W | 17100LM | MWL-HL-120W-50K





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com | www.westgatecontrols.co




WG-Z7-2D-22

Photometrics: WML-HL-60W



BUG Rating: B1-U4-G5

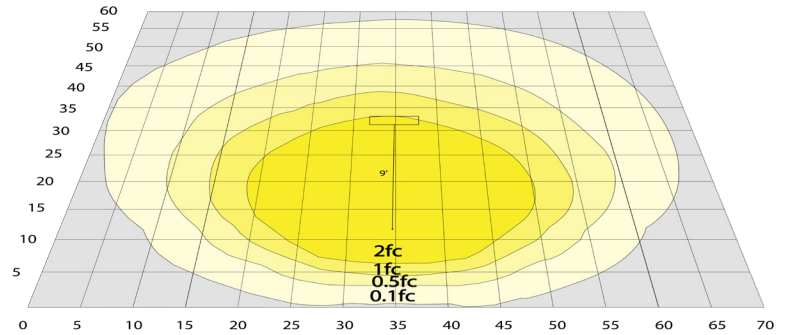

Area 60'x 70' Mounting Height: 9'


Other Views:



Side View



Front View



Back View

Performance Table: WML-HL-60W

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WML-HL-60W-30K	60W	120-277V	8700LM	3000K	B1-U4-G5	145
WML-HL-60W-40K	60W	120-277V	8700LM	4000K	B1-U4-G5	145
WML-HL-60W-50K	60W	120-277V	8700LM	5000K	B1-U4-G5	145

Sample Ordering

Model Watt Color Temp.

WML - HL - 60W -

30K = 3000K
40K = 4000K
50K = 5000K

Accessories:

Blank = No Option For Accessories
WML-SH2= SHIELD FOR WML 60W

Factory-Installed Options:

Blank = No Option For Accessories
OPT-EM-OD1HEXT= EXTERNAL EMERGENCY BACKUP BATTERY
OPT-PC-B= 120-277V
OPT-CLR-85= COLOR PAINT
OPT-SEN-3MRLV-5= PROGRAMMABLE MICROWAVE BI-LEVEL SENSOR
WEC-7RC= REMOTE CONTROL

ACCESSORY:



WML-SH2

FACTORY-INSTALLED OPTIONS:



OPT-EM-OD1HEXT



OPT-PC-B



OPT-SEN-3MRLV-5



WEC-7RC

Example:

1. WML-HL-50W-30K (FOR 50W 3000K FIXTURE 120-277V)
OPT-EM-OD1HEXT (EXTERNAL EMERGENCY BACKUP BATTERY)

WESTGATE

