




**DIMENSIONS:**

3.13" D X 0.23"

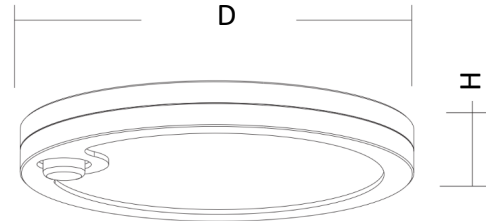

**PL12-MCT5-PIR-BN  
PL12-MCT5-PIR-WH**

**12V PUCK 5CCT WITH PIR SENSOR**

Ideal for under cabinet, display cases or in low profile areas.

**ELECTRICAL SPECIFICATIONS:**

- Working Voltage: 12VDC
- Wattage: 5W
- Efficacy: 60LM/W

**HOUSING SPECIFICATIONS:**

- PC Housing with white/ brushed-Nickel finish
- 3.3 ft. cord with male socket
- Mounting: Recessed
- Screwless Trim

**LIGHTING SPECIFICATIONS:**

- Total lumens: 300LM
- color temperature: 2700K/3000K/3500K/4000K/5000K
- Beam Angle: 120°

**CERTIFICATIONS:**



**WARRANTY: 3 years**

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
PL12-MCT5-PIR-BN	5W	12VDC	300LM	MCT5
PL12-MCT5-PIR-WH	5W	12VDC	300LM	MCT5

**OPTIONAL ACCESSORIES:**



MODEL	DESCRIPTION
PL12-SPLIT3-WH	3-Hole mini splitter with female socket & 40" cord, white
PL12-SPLIT3-BK	3-Hole mini splitter with female socket & 40" cord, Black
PL12-SPLIT6-WH	6-Hole mini splitter with female socket & 40" cord, white
PL12-SPLIT6-BK	6-Hole mini splitter with female socket & 40" cord, Black
PL12-SPLIT10-WH	10-Hole mini splitter with female socket & 40" cord, white
PL12-SPLIT10-BK	10-Hole mini splitter with female socket & 40" cord, Black
PL12-PF-WH	6" Power feed cord, White
PL12-PF-BK	6" Power feed cord, Black
PL12-PIDR-12W-WH	12W Plug-in driver with switch, white
PL12-PIDR-12W-BK	12W Plug-in driver with switch, Black
PL12-PIDR-24W-WH	24W Plug-in driver with switch, white
PL12-PIDR-24W-BK	24W Plug-in driver with switch, Black
PL12-ILDMR-WH	In-Line dimming control, White
PL12-ILDMR-BK	In-Line dimming control, Black
PL12-HWDR-25W-D	Dimmable driver, 100-240V

