

POL SERIES Outdoor Lighting

POL-D1-144-3PC-BR
DECORATIVE 3-PIECE LIGHT POLE

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!


Customer Name: _____
 Project Name: _____
 Note: _____ | Type: _____



Avail Finishes:



Components:

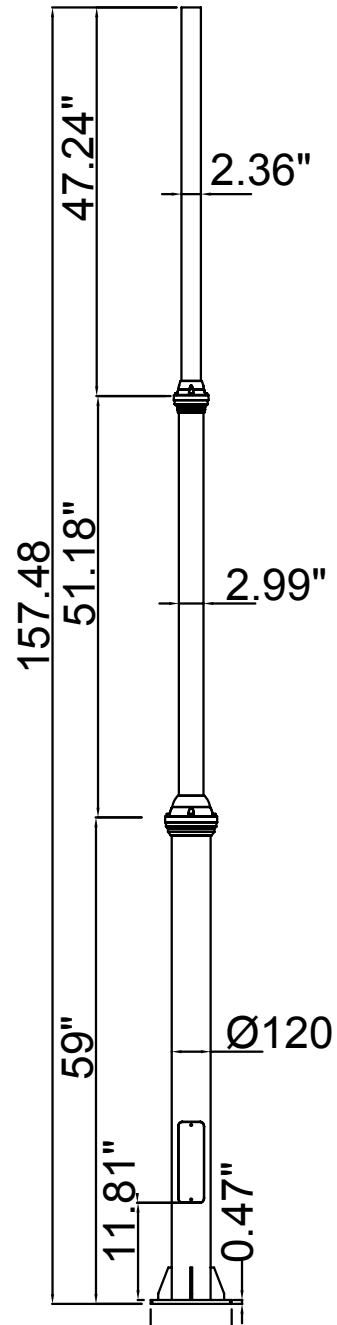

9.84" x 9.84"

This stylish and durable 3-piece light pole is designed to enhance outdoor lighting projects with a blend of aesthetics and functionality. Engineered for stability and corrosion resistance, it's perfect for commercial and residential landscapes. The modular design ensures easy installation and maintenance, while its compatibility with a wide range of luminaire fixtures makes it a versatile choice for various applications. Ideal for walkways, streetscapes, and parking lots, this light pole provides long-lasting performance while complementing the surrounding architecture.



Phone: (877) 805-2252 | Fax: (877) 805-2252
 www.westgatemfg.com |



WG-09052024

DECORATIVE 3-PIECE LIGHT POLE:

MODEL NO.	Descriptions
POL-D1-144-3PC-BR	144In Decorative Pole D1 Series, 3Pc, 2.36In Tenon, Bronze

Accessories:

Blank = No Option For Accessories

POL-D1-ABK = D1 Series Pole Anchor Bolt Kit 9/16 (M14)



POL-D1-BASECVR-BR = D1 Series Pole 2-Pc Cube Base Cover, Bronze

POL-D1-BASECVR-BK = D1 Series Pole 2-Pc Cube Base Cover, Black

ACCESSORIES:





POL-D1-ABK

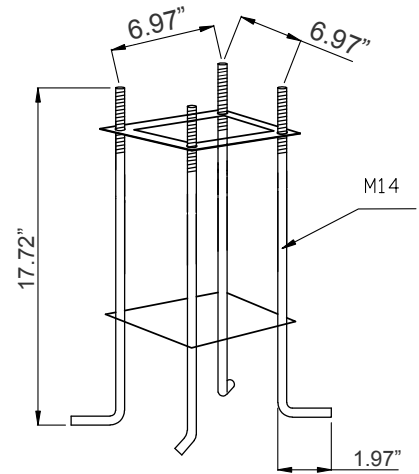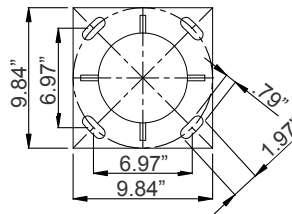

17.72" (H) x 9.84" (W) x 9.84" (D)



POL-D1-BASECVR-BR
POL-D1-BASECVR-BK

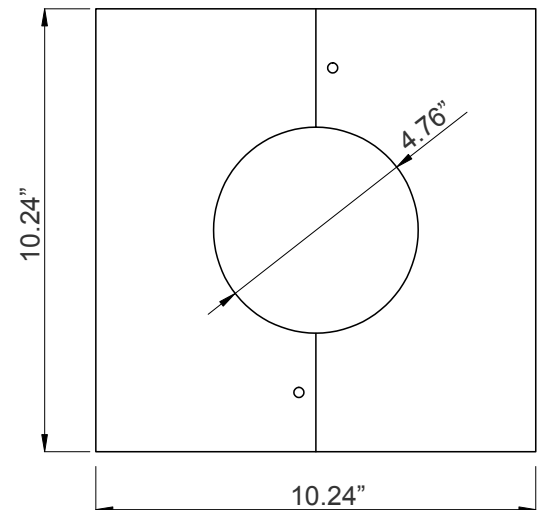
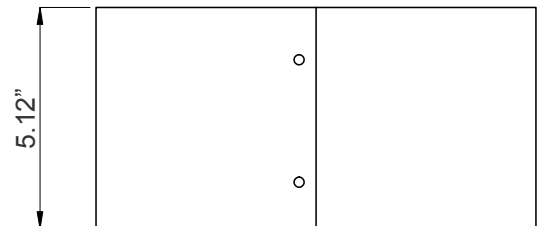


10.24" (H) x 10.24" (W) x 5.12" (D)




DECORATIVE 3-PIECE LIGHT POLE:


- Die-casting Aluminum
- Powder-Coated
- Corrosion Resistant Aluminum for Exterior

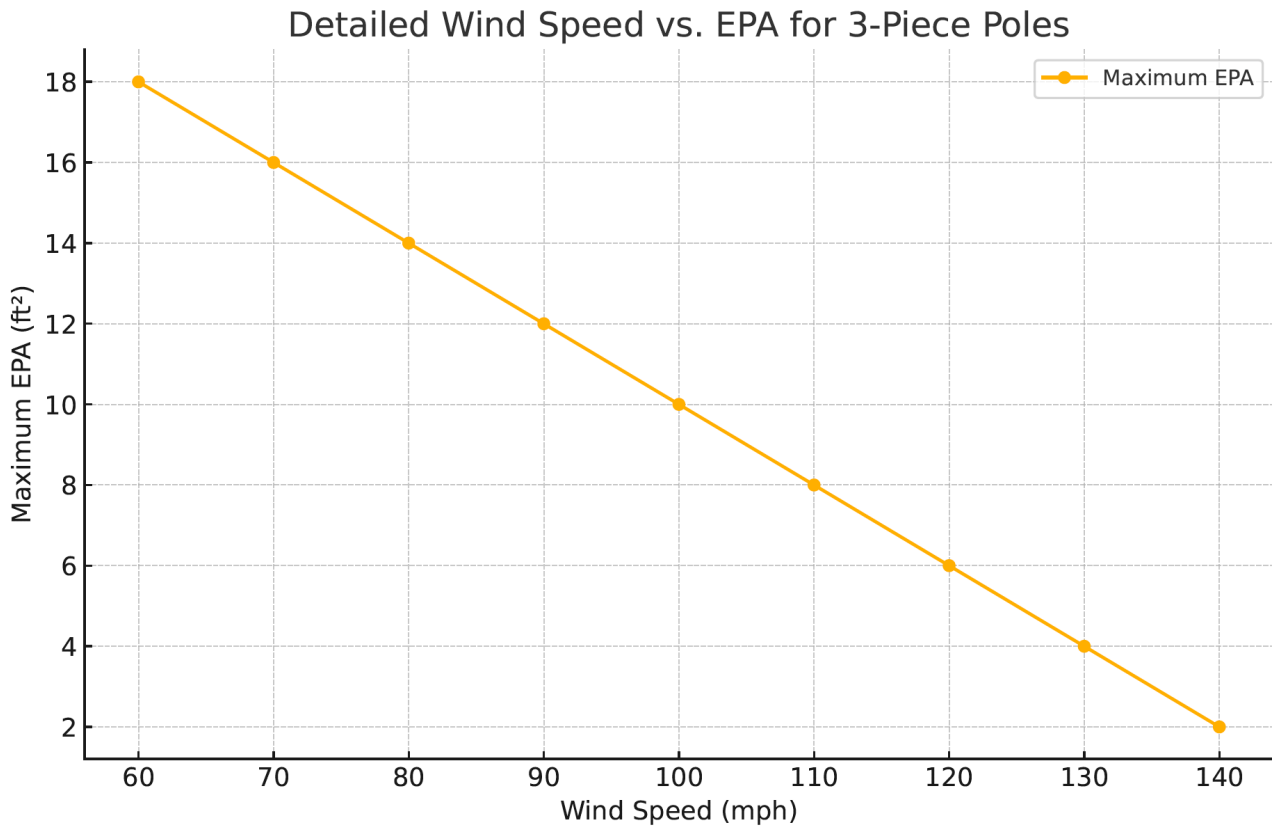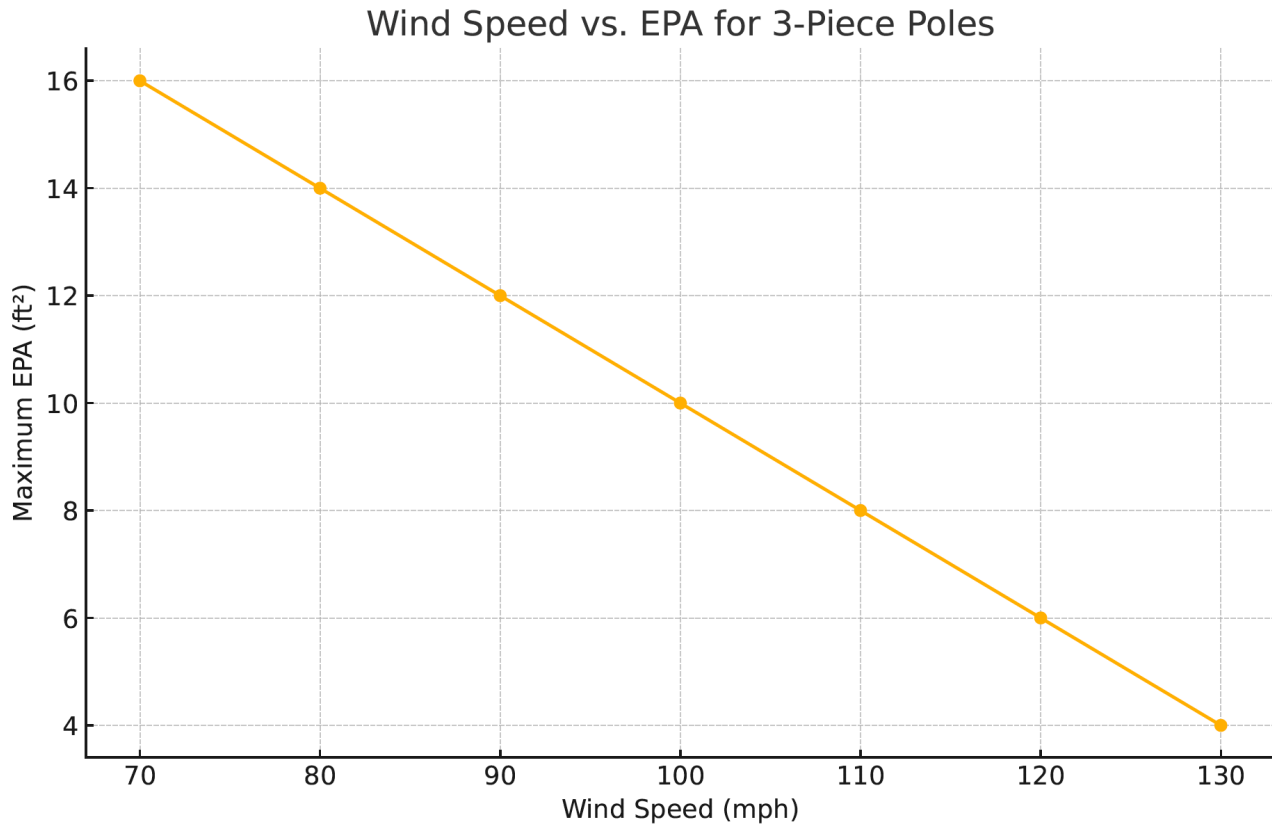

Wind Speed vs. EPA and Weight for 3-Piece Poles

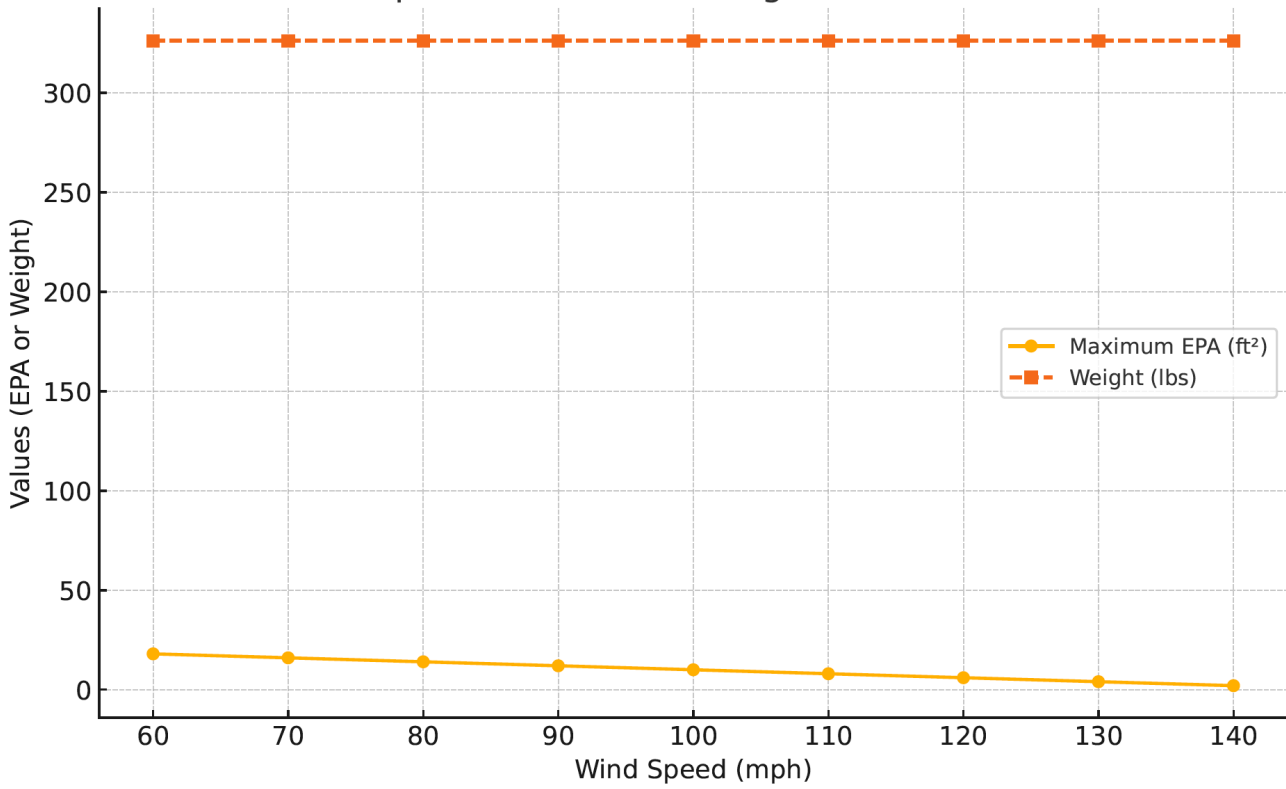

Wind Speed vs. EPA for Different Fixture Configurations

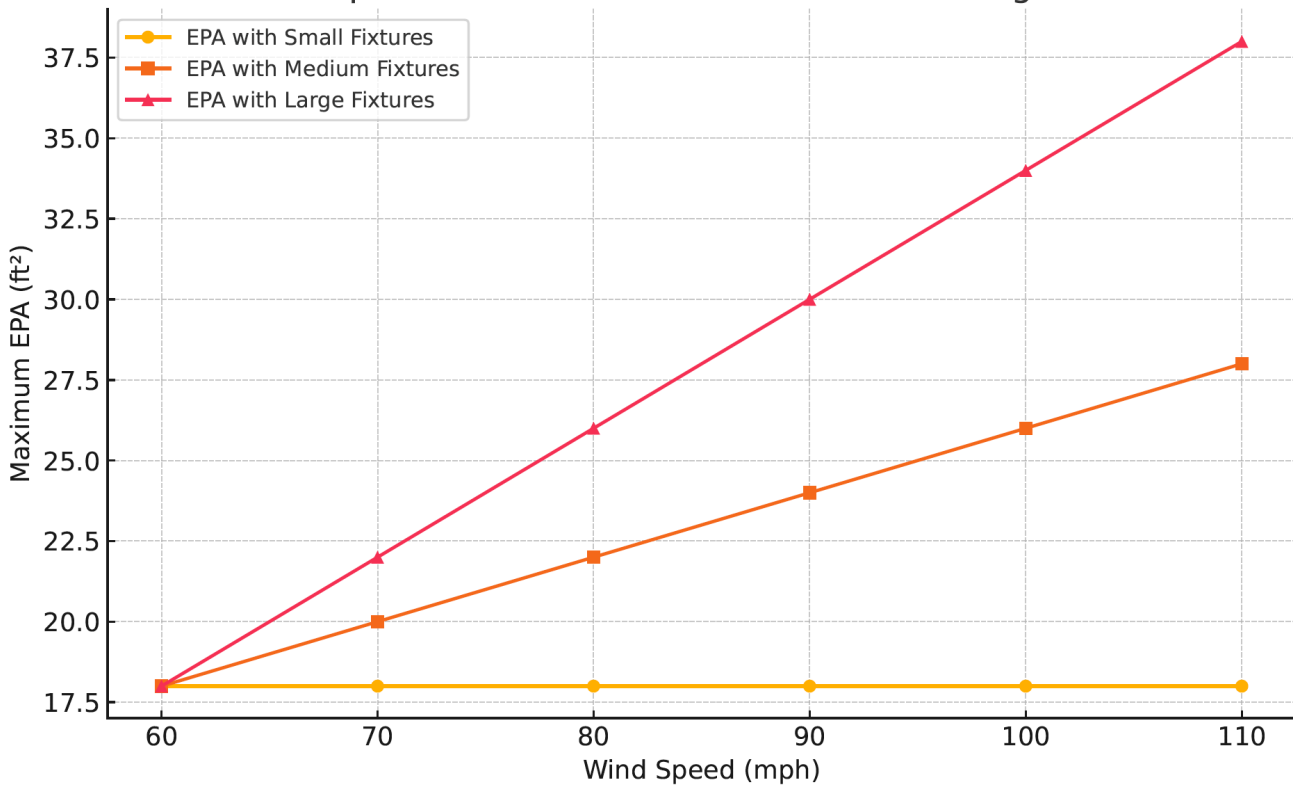

Wind Speed (mph)	Base EPA (ft-≤)	EPA with Small Fix- tures (ft-≤)	EPA with Medium Fixtures (ft-≤)	EPA with Large Fix- tures (ft-≤)	Weight (lbs)
60	18	18	18	18	326.24
70	16	18	20	22	326.24
80	14	18	22	26	326.24
90	12	18	24	30	326.24
100	10	18	26	34	326.24
110	8	18	28	38	326.24
120	6	18	30	42	326.24
130	4	18	32	46	326.24
140	2	18	34	50	326.24

