

RD2TL SERIES

RESIDENTIAL LIGHTING

RD2TL-MCT5

RD2TL-MCT5-BK

MCT5



2" Round Trimless Recessed Light



Black



White



Front View

The RD2TL-MCT5 Series is a 2" round trimless recessed downlight designed for clean architectural ceiling applications. The fixture installs with a mud-in trim for a seamless finished appearance and includes a remote driver box with an integrated 5CCT selector. With CRI 90 color quality, deep regress optics, and wet location/IC-rated construction, it is ideal for residential, hospitality, restaurant, corridor, and finished ceiling applications requiring compact low-glare illumination.

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

FEATURES:

- Clean trimless ceiling appearance
- 5CCT selectable for field flexibility
- Remote driver box for easier installation and service access
- Deep regress design helps reduce glare
- IC rated for insulated ceilings
- Wet location rated
- JA8-2025 compliant
- Conforms to UL 1598
- cETLus listed
- FCC compliant
- 5-year limited warranty

SPECIFICATIONS:

ELECTRICAL:

- 120 VAC, 60 Hz
- 9W
- TRIAC/ELV dimming
- Remote driver box included
- CCT selectable switch located on remote driver box
- Class 2 isolated low-voltage driver
- Power factor: >0.9
- Total harmonic distortion: <25%
- FT4 rated cable with male/female quick connector
- Minimum 194°F supply conductors required

MECHANICAL:


- 2" round trimless recessed downlight
- White and black finishes available
- Trimless mud-in installation
- Canless recessed design
- Remote driver/J-box included
- Die-cast aluminum heatsink
- Round mud-in plate for simplified installation
- Ceiling cutout: 2-13/16" round
- Suitable for 0.5" to 1" ceiling thickness
- IC rated for direct contact with insulation
- Wet location rated for covered ceiling mount only
- Package includes fixture, trim, driver box, screws, and template

LIGHTING:

- 600 lumens
- 5CCT selectable:
2700K/3000K/3500K/4000K/5000K
- CRI 90
- COB LED light source
- Deep regress optical design
- Round aperture
- Polycarbonate lens

APPLICATIONS:

- Ideal for residential, hospitality, retail, galleries, museums, and other high-end architectural lighting applications.

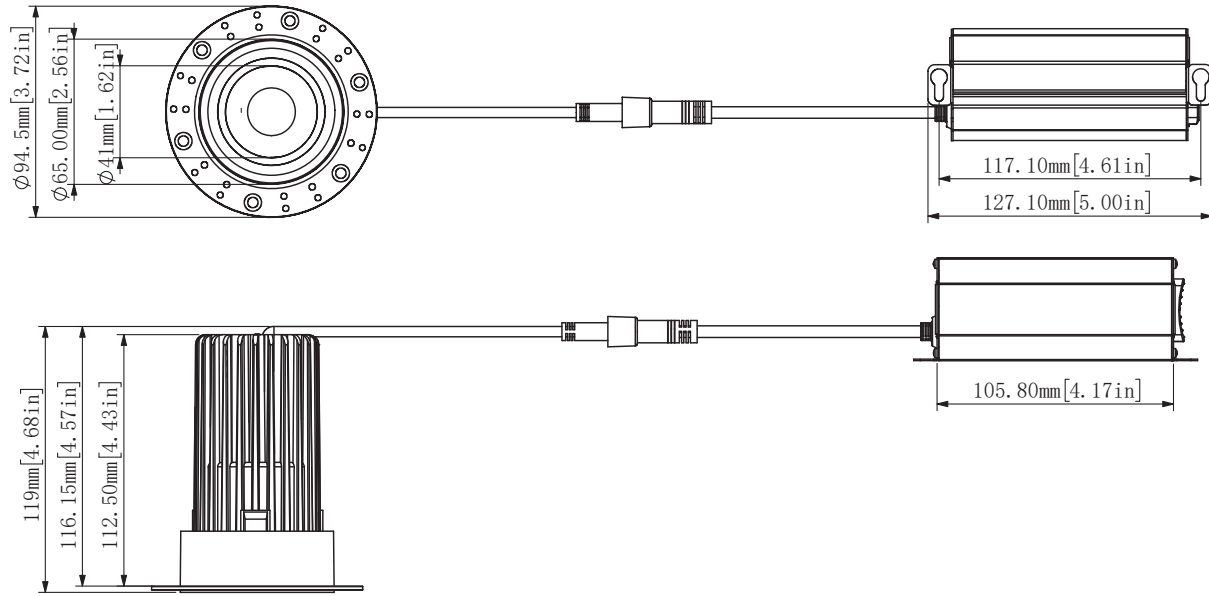

Technical Drawing: 3.72" (D) x 4.68" (W)

PERFORMANCE TABLE

MODEL NO.	WATTAGE	LUMEN	COLOR TEMP	LPW
RD2TL-MCT5 RD2TL-MCT5-BK	9W	600LM	27K/30K/35K/40K/50K	66LM/W