


RDL SERIES RESIDENTIAL LIGHTING

RDL4-ST-MCT5-12V
12V LOW-VOLTAGE LED REPLACEMENT TRIMS FOR MR16 HOUSINGS

MCT5 Multi Color Temperature (Selectable)



Customer Name: _____
Project Name: _____
Note: _____ | Type: _____

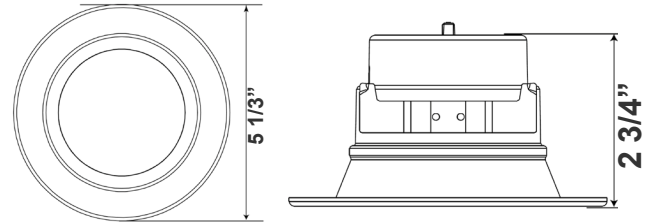

LED DOWNLIGHTS (SMOOTH TRIM) - 4" ROUND Ideal for New as well as old residential and commercial constructions.

5 1/34" x 2 3/4"

Features

- 4" Smooth Trim
- Multi CCT (Selectable Switch on the Back of the driver)
- Isolated Driver for Improved Thermal Management
- 5-Year Warranty
- Spun Aluminum with White Powder Coat Finish

Technical Specifications

Electrical:

- Voltage: 12V AC
- Output Voltage: 36VDC
- Power Factor: >0.90
- Wattage: 11W
- Efficacy: 77 LPW
- Total Harmonic Distortion: ≤15 %

Mechanical:

- Spun Aluminum With White Powder Coat Finish
- Includes 8" Bi-Pin Adapter That Fits any Standard MR16 lamp Base
- Maximum Ambient Temperature: 104°F
- Fits in Standard 4" Recessed Housings
- Wet Location
- 5-Year Warranty

Lighting:

- Multi CCT (Selectable Switch On The Back Of The Driver)
- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Can Rotate After Installation to Align
- Optics: White Translucent Acrylic Lens
- Total Lumens: 847LM Max.
- Color Rendering Index: CRI ≥ 90
- Rated life: 50,000 hrs

Applications:



- LED retrofit trim have been designed to be a flexible lighting solution for retrofit and new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications

Other Models:


- 11W | 847LM | RDL4-BF-MCT5-12V




Photometrics: RDL4-BF-MCT5-12V

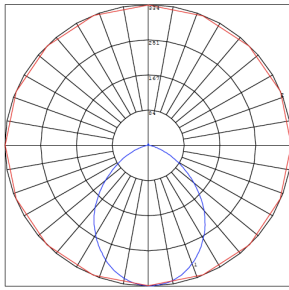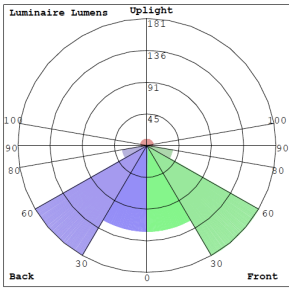


BUG Rating: B1-U1-G0

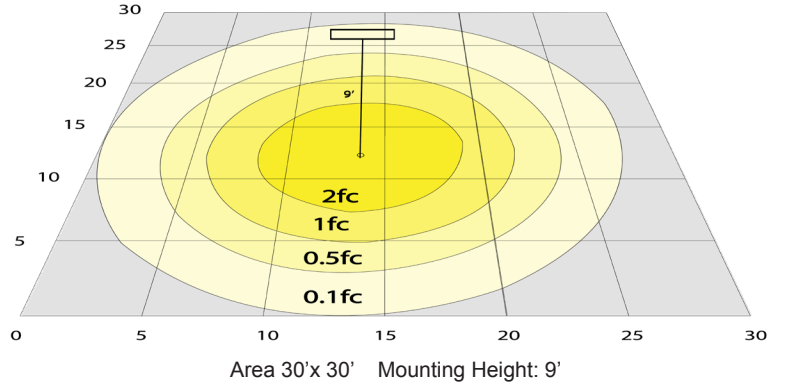


Other Views:

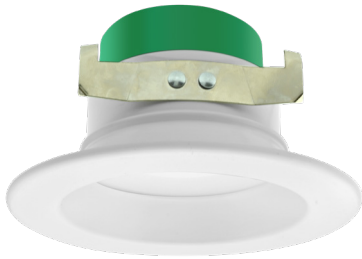

Side View

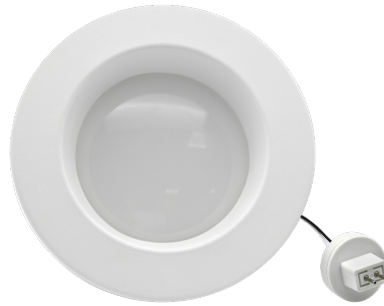

Front View

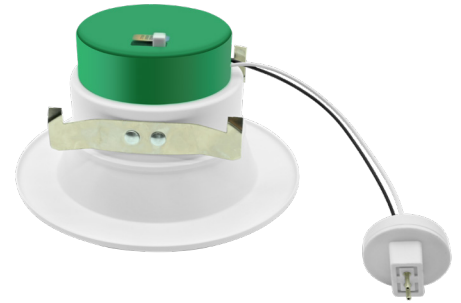

Back View

Performance Table: RDL4-ST-MCT5-12V

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
RDL4-ST-MCT5-12V	11W	12V	847LM	2700K	B1-U1-G0	77
				3000K		
				3500K		
				4000K		
				5000K		

Sample Ordering

Model	Trim	Color Temp.	Volt
RDL4	ST	MCT5	12V

