

RDL4S SERIES

RESIDENTIAL LIGHTING

WESTGATE

THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

RDL4S-SB-MCT5-BK

4" LED SNAP-IN RECESSED LIGHTS SMOOTH AND BAFFLE TRIMS INCL.


MCT5 Multi Color Temperature (Selectable)

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

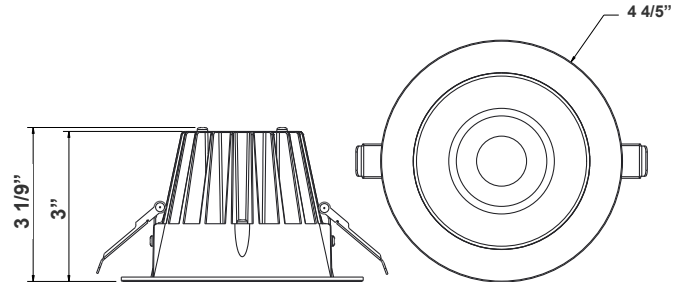

4 4/5" (D) x 3 1/9" (H)

LED DOWNLIGHTS (SMOOTH and BAFFLE TRIM) - 4" LED Anti-glare Downlight Comes Complete With An External Driver In a Junction Box. Commercial Grade Quality With Architectural Design

Features

- Smooth Trim, Baffle Trim Insert Included. Multi CCT (Selectable Switch on the Back of the driver)
- 5-Year Warranty
- Durable, Die-Cast Aluminum Alloy For Optimal Heat Dissipation

Technical Specifications

Electrical:

- Voltage: 120V AC
- Output Voltage: 36VDC
- Power Factor: >0.90
- Wattage: 15W
- Efficacy: 90 LPW
- Total Harmonic Distortion: ≤15 %

Mechanical:

- Smooth Trim, Baffle Trim Insert Included.
- Up to 9 AWG18 Wires
- Durable, Die-Cast Aluminum Alloy For Optimal Heat Dissipation
- Junction box Included, Install Directly in Insulated Ceilings (IC) Without Any Thermal Housing
- Maximum Ambient Temperature: -40°F to 104°F
- Damp Location
- 5-Year Warranty

Lighting:

- Multi CCT (Selectable Switch on the Back of the driver)
- Dimming: Dimmable Down to 10% Using a Standard TRIAC LED Dimmer
- Can Rotate after Installation to Align
- LED: High Brightness COB LED
- Optics: White Translucent Acrylic
- Total Lumens: 1350LM
- Color Temperatures: 2700K/ 3000K/ 3500K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 90
- Beam Angle: 36°
- Rated Life: 50,000 hrs

Applications:

- LED recessed trims have been designed to be a flexible lighting solution for new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications

Other Models:

- 15W | 1350LM | SDL4S-SB-MCT5-BK





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-03212023

Photometrics: RDL4S-SB-MCT5-BK

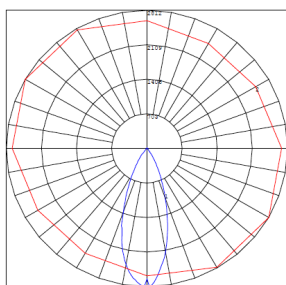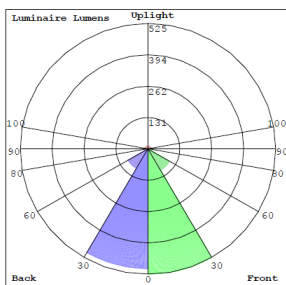

BUG Rating: B2-U2-G0

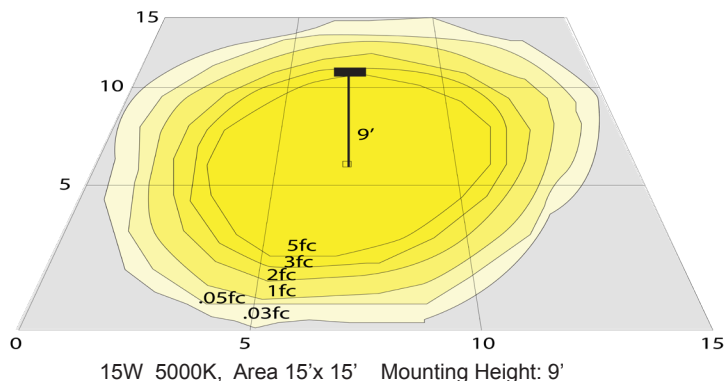


15W 5000K, Area 15'x 15' Mounting Height: 9'

Other Views:



Side View



Baffle Front View



Smooth Front View



Junction box 1-1/4" thick included with fixtures
Back View

Performance Table: RDL4S-SB-MCT5-BK

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
RDL4S-SB-MCT5-BK	15W	120V	1350LM	2700K	B2-U2-G0	90
				3000K		
				3500K		
				4000K		
				5000K		

Sample Ordering

Model	Trim	Color Temp.	Color
RDL4S	SB	MCT5	BK

Accessories:

Blank = No Option For Accessories

RSL4-RI-13 = 4" ROUND ROUGH-IN PLATE, 13" LONG

RSL4-RI = 4" ROUND ROUGH-IN PLATE, 26" LONG

RSL-346-RIBH = 3", 4", 6" (ADJUSTABLE) ROUND GALVANIZED PLATE WITH BAR HANGERS

RSL4-GR = GOOF RING FOR 4IN LIGHTS WITH BUTTERFLY WINGS

Factory-Installed Option:

Blank = No Option For Accessories

OPT-EM-DL1EXT = EXTERNAL BATTERY BACKUP

ACCESSORIES:



RSL-346-RIBH
3", 4", 6" (Adjustable) Round Galvanized plate with Bar Hangers



RSL4-RI-13
4" Round Rough-in Plate, 13" Long



RSL4-RI
4" Round Rough-in Plate, 26" Long



RSL4-GR

Goof Ring For 4in Lights With Butterfly Wings

FACTORY-INSTALLED OPTION:



OPT-EM-DL1EXT
EXTERNAL BATTERY BACKUP



Compatible Dimmer List:

MODEL NO.	BRAND
6631-1LT	LEVITON
MACL-153MLH-AL	LUTRON
TGCL-153PH-LA	LUTRON
DVW-603PGH-WH	LUTRON
CT-600PR-WH	LUTRON
LGCL-153PHL-IV	LUTRON
TGCL-153PH-LA	LUTRON
LSLV603PWV	LUTRON
6674-POW	LEVITON
DVCL-153P	LUTRON
MSCL-OP153P	LUTRON
CTCL-153P	LUTRON
MACL-153M	LUTRON
HCL453PTCCCV6	PASS & SEYMOUR
LSLV603PWV	PASS & SEYMOUR

