

# RDMF SERIES RESIDENTIAL LIGHTING


RDMF4-MCT5  
RDMF4-MCT5-BK  
RDMF4-MCT5-ORB

WESTGATE SIGNATURE DEEP BAFFLE RETROFIT METAL LED  
RECESSED TRIM 5CCT

**MCT5** Multi Color Temperature (Selectable)



The Westgate Signature Deep Baffle Retrofit Trim is designed for efficient and versatile LED lighting. Featuring a metal construction, it offers durability and a sleek appearance. This recessed trim is equipped with a deep baffle design to minimize glare and improve visual comfort. The 5CCT (Correlated Color Temperature) feature allows for customizable color temperature selection, ranging from warm to cool white, making it adaptable to various lighting needs and environments. Ideal for retrofitting existing fixtures, it provides an energy-efficient and modern lighting solution for residential and commercial spaces.

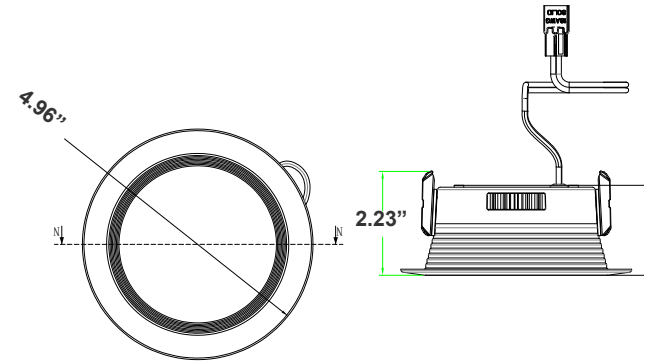

2.23"(H) x 4.96"(D)

## Features

- 4" Baffle Trim
- Multi CCT (Selectable Switch on the Back of the driver )
- Isolated Driver for Improved Thermal Management
- 5-Year Warranty
- Spun Aluminum with White Powder Coat Finish

## Technical Specifications

### Electrical:

- Voltage: 12V AC
- Output Voltage: 36VDC
- Power Factor: >0.90
- Wattage: 6W/7W/9.5W
- Efficacy: 84 LPW
- Total Harmonic Distortion: ≤15 %

### Mechanical:

- Spun Aluminum With White, Black and Oil-rubbed bronze Powder Coat Finish
- Includes 8" Bi-Pin Adapter That Fits any Standard MR16 lamp Base
- Maximum Ambient Temperature: 104°F
- Fits in Standard 4" Recessed Housings
- 5-Year Warranty

### Lighting:

- Multi CCT (Selectable Switch On The Back Of The Driver)
- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Can Rotate After Installation to Align
- Optics: White Translucent Acrylic Lens
- Total Lumens: 550LM, 650LM, 800LM Max.
- Color Rendering Index: CRI ≥ 90
- Rated life: 50,000 hrs

### Applications:




- LED retrofit trim have been designed to be a flexible lighting solution for retrofit and new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications

### Other Models:

- 13W | 1100LM | RDMF6-MCT5



## Photometrics: RDMF4-MCT5

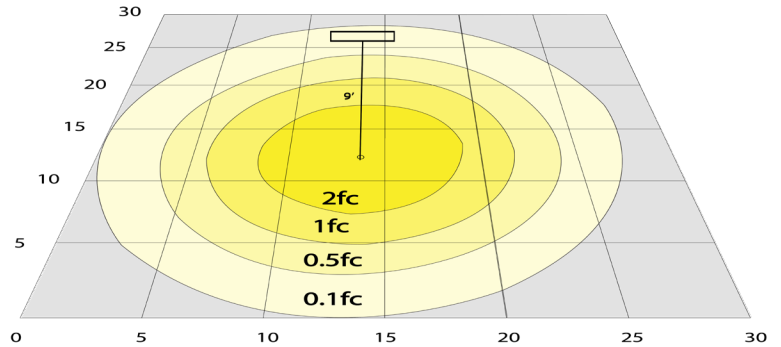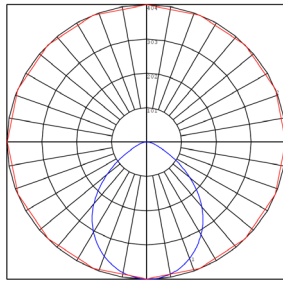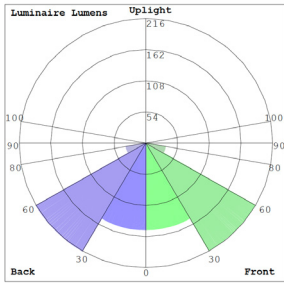

BUG Rating: B1-U0-G0

Area 30'x 30' Mounting Height: 9'

## Other Views:

RDMF4-MCT5



Side View



Back View

RDMF4-MCT5-BK



Side View



Back View

RDMF4-MCT5-ORB



Side View



Back View

## Performance Table: RDMF4-MCT5

| MODEL NO.      | Wattage | Voltage | Lumens | Color Temp. | BUG Rating | LPW |
|----------------|---------|---------|--------|-------------|------------|-----|
| RDMF4-MCT5     | 6W      | 12V     | 550LM  | 2700K       | B1-U0-G0   | 92  |
| RDMF4-MCT5-BK  | 7W      |         | 650LM  | 3000K       |            |     |
| RDMF4-MCT5-ORB | 9.5W    |         | 800LM  | 3500K       |            |     |
|                |         |         |        | 4000K       |            |     |
|                |         |         |        | 5000K       |            | 84  |

## Sample Ordering

Model Color Temp. Finish

RDMF4 - MCT5 -

WH = White  
BK = Black  
ORB = Oil-Rubbed Bronze

## Accessory:

Blank = No Option For Accessories  
ELB-0895= FIELD-INSTALLED EMERGENCY BALLAST FOR ALL LED RECESSED TRIMS; INPUT VOLTAGE:100~277VAC, 50~60Hz; OUTPUT: 8W MAXIMUM FOR 90 MINUTES

## ACCESSORY:



ELB-0895

