

RDMF SERIES RESIDENTIAL LIGHTING

RDMF6-MCT5
RDMF6-MCT5-BK
RDMF6-MCT5-ORB

WESTGATE SIGNATURE DEEP BAFFLE RETROFIT METAL LED
RECESSED TRIM 5CCT

MCT5 Multi Color Temperature (Selectable)




The Westgate Signature Deep Baffle Retrofit Trim is designed for efficient and versatile LED lighting. Featuring a metal construction, it offers durability and a sleek appearance. This recessed trim is equipped with a deep baffle design to minimize glare and improve visual comfort. The 5CCT (Correlated Color Temperature) feature allows for customizable color temperature selection, ranging from warm to cool white, making it adaptable to various lighting needs and environments. Ideal for retrofitting existing fixtures, it provides an energy-efficient and modern lighting solution for residential and commercial spaces.

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

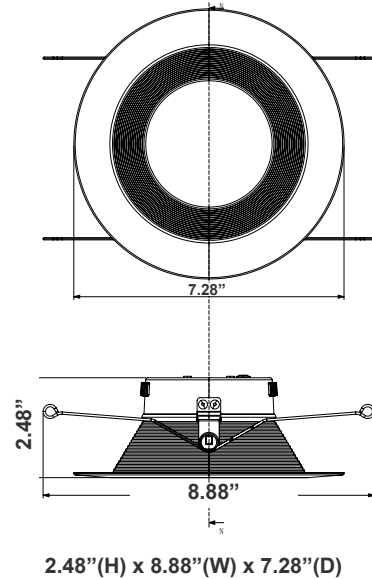

Features

- 6" Baffle Trim
- Multi CCT (Selectable Switch on the Back of the driver)
- Isolated Driver for Improved Thermal Management
- 5-Year Warranty
- Spun Aluminum with White Powder Coat Finish

Technical Specifications

Electrical:

- Voltage: 120V AC
- Output Voltage: 36VDC
- Power Factor: >0.90
- Wattage: 8W/10W/13W
- Efficacy: 85 LPW
- Total Harmonic Distortion: ≤15 %

Mechanical:

- Spun Aluminum With White, Black and Oil-rubbed bronze Powder Coat Finish
- Includes 8" Bi-Pin Adapter That Fits any Standard MR16 lamp Base
- Maximum Ambient Temperature: 104°F
- Fits in Standard 4" Recessed Housings
- 5-Year Warranty

Lighting:

- Multi CCT (Selectable Switch On The Back Of The Driver)
- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Can Rotate After Installation to Align
- Optics: White Translucent Acrylic Lens
- Total Lumens: 750LM/900LM/1100LM Max.
- Color Rendering Index: CRI ≥ 90
- Rated life: 50,000 hrs

Applications:



- LED retrofit trim have been designed to be a flexible lighting solution for retrofit and new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications

Other Models:


- 9.5W | 800LM | RDMF4-MCT5



Photometrics: RDL6-BF-MCT5

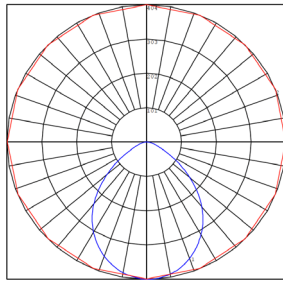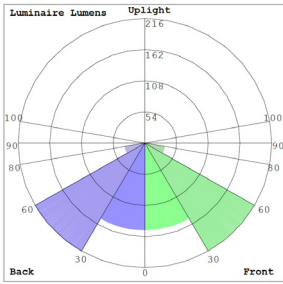

BUG Rating: B1-U0-G0

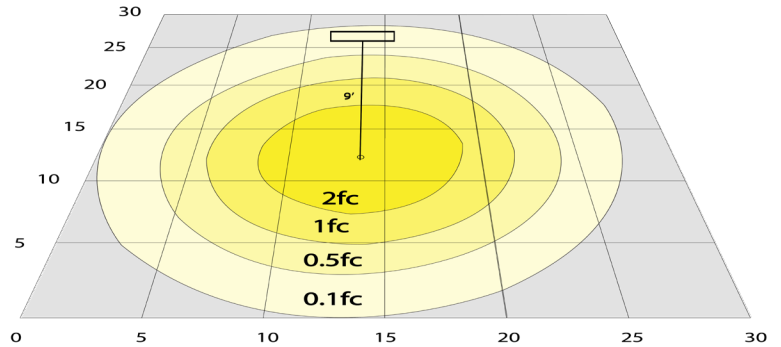

Area 30'x 30' Mounting Height: 9'

Other Views:

RDMF4-MCT5




Side View



Back View

RDMF4-MCT5-BK




Side View



Back View

RDMF4-MCT5-ORB



Side View



Back View

Performance Table: RDMF6-MCT5

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
RDMF6-MCT5	8W	120V	750LM	2700K	B1-U0-G0	94
RDMF6-MCT5-BK	10W		900LM	3000K		
RDMF6-MCT5-ORB	13W		1100LM	3500K		
				4000K		
				5000K		

Sample Ordering

Model Color Temp. Finish

RDMF6 - MCT5 -

WH = White
BK = Black
ORB = Oil-Rubbed Bronze

Accessory:

Blank = No Option For Accessories
ELB-0895= FIELD-INSTALLED EMERGENCY BALLAST FOR ALL LED RECESSED TRIMS; INPUT VOLTAGE:100~277VAC, 50~60Hz; OUTPUT: 8W MAXIMUM FOR 90 MINUTES

ACCESSORY:



ELB-0895

