

RD TL SERIES

RESIDENTIAL LIGHTING

RDS3TL-MCT5

RDS3TL-MCT5-BK


MCT

3" Square Trimless Recessed Light



Black

White

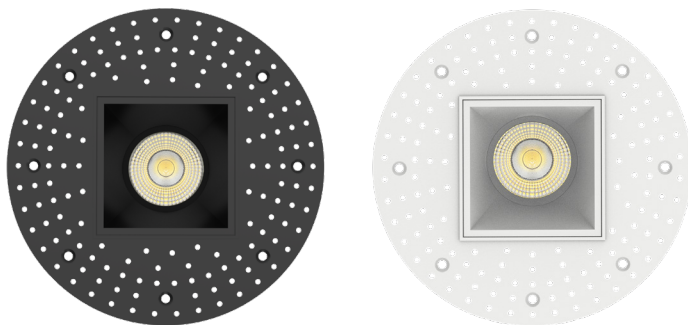

Front View

The RDS3TL-MCT5 Series is a 3" square trimless recessed downlight designed for architectural interiors requiring a clean square aperture. The round mud-in plate simplifies the ceiling cutout while maintaining a refined square finish. The fixture includes a remote driver box with 5CCT selection, CRI 90 LED performance, and wet location/IC-rated construction for reliable use in finished ceiling applications.

Customer Name:

Project Name:

Note:

Type:

FEATURES:

- 3" square trimless recessed downlight
- White and black finishes available
- Trimless mud-in installation
- Canless recessed design
- Remote driver/J-box included
- Die-cast aluminum heatsink
- Round mud-in plate for simplified ceiling preparation
- Ceiling cutout: 4-3/8" round
- Suitable for 0.5" to 1" ceiling thickness
- IC rated for direct contact with insulation
- Wet location rated for covered ceiling mount only
- Package includes fixture, trim, driver box, screws, and template

SPECIFICATIONS:

ELECTRICAL:

- 120 VAC, 60 Hz
- 15W
- TRIAC/ELV dimming
- Remote driver box included
- CCT selectable switch located on remote driver box
- Class 2 isolated low-voltage driver
- Power factor: >0.9
- Total harmonic distortion: <25%
- FT4 rated cable with male/female quick connector
- Minimum 194°F supply conductors required

MECHANICAL:


- 3" square trimless recessed downlight
- White and black finishes available
- Trimless mud-in installation
- Canless recessed design
- Remote driver/J-box included
- Die-cast aluminum heatsink
- Round mud-in plate for simplified ceiling preparation
- Ceiling cutout: 4-3/8" round
- Suitable for 0.5" to 1" ceiling thickness
- IC rated for direct contact with insulation
- Wet location rated for covered ceiling mount only
- Package includes fixture, trim, driver box, screws, and template

LIGHTING:

- 1000 lumens
- 5CCT selectable:
2700K/3000K/3500K/4000K/5000K
- CRI 90
- COB LED light source
- Deep regress optical design
- Square aperture
- Polycarbonate lens

APPLICATIONS:

- Ideal for residential, hospitality, retail, galleries, museums, and other high-end architectural lighting applications.

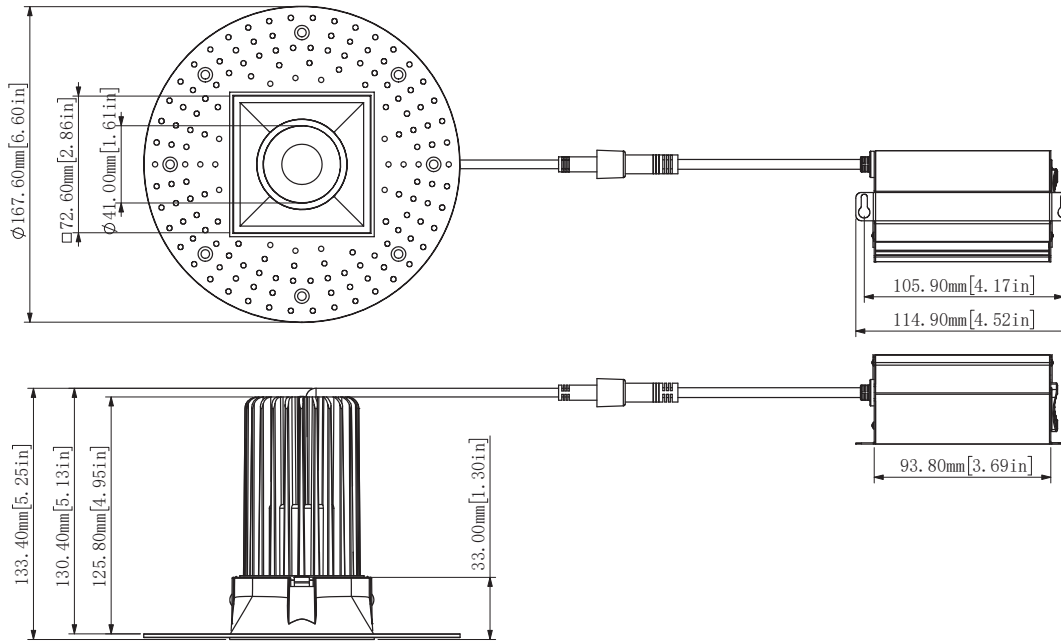

Technical Drawing: 6.6" (D) x 5.25" (W)

PERFORMANCE TABLE

MODEL NO.	WATTAGE	LUMEN	COLOR TEMP	LPW
RDS3TL-MCT5 RDS3TL-MCT5-BK	15W	1000LM	27K/30K/35K/40K/50K	66LM/W