

RSL SERIES RESIDENTIAL LIGHTING

RSL4-APD-MCT5

4" LED 5CCT ADJUSTABLE PULL-DOWN ULTRA SLIM CANLESS RECESSED LIGHT

MCT5 Multi Color Temperature (Selectable)


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

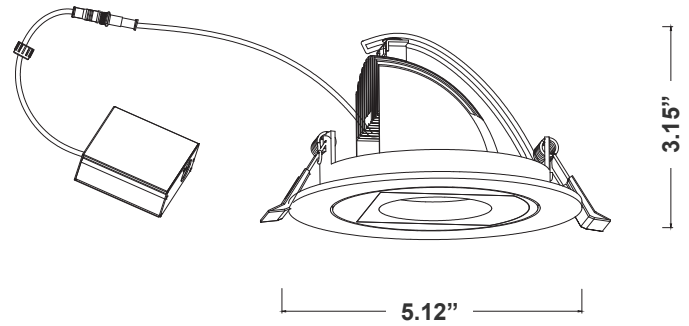

LED DOWNLIGHTS (SMOOTH TRIM) - 4" ROUND Ideal for New As Well As Old Residential And Commercial Constructions.

5.12"(W) x 3.15"(H)

Features

- 4" Smooth Recessed Trim
- Multi CCT (Selectable Switch on the Back of the driver)
- Isolated Driver for Improved Thermal Management
- 5-Year Warranty
- Spun Aluminum with White Powder Coat Finish

Technical Specifications

Electrical:

- Voltage: 120V AC
- Output Voltage: 36VDC
- Power Factor: >0.90
- Wattage: 10W
- Efficacy: 70 LPW
- Total Harmonic Distortion: ≤15 %

Mechanical:

- 1/4" Thick
- Up to 9 AWG18 Wires
- Die-cast Aluminum with white powder coat finish
- Pot Light Housing is Not Required Even for Insulated Ceiling
- Junction box 1" Thick Included with Fixture
- Type1 Crated: Approved for direct contact with insulation
- Maximum Ambient Temperature: -40°F to 104°F
- Suitable for Damp Location
- 5-Year Warranty

Lighting:

- Dimming: Dimmable Down to 10% Using a Standard TRIAC LED Dimmer
- Lens: 0.125" White Translucent Acrylic
- Can Rotate after Installation to Align
- LED: Seoul DOB (Driver On Board) Technology
- Optics: White Translucent Acrylic
- Total Lumens: 700LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Multi CCT (Selectable Switch on the Back of the driver)
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 100°-110°
- Rated life: 50,000 hrs

Applications:

- LED recessed trims have been designed to be a flexible lighting solution for new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-Z8-2F-2Z

Photometrics: RSL4-APD-MCT5

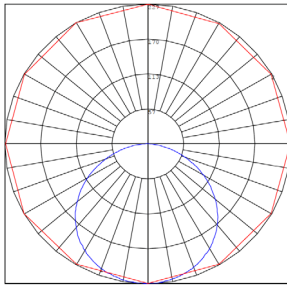

BUG Rating: B2-U1-G0

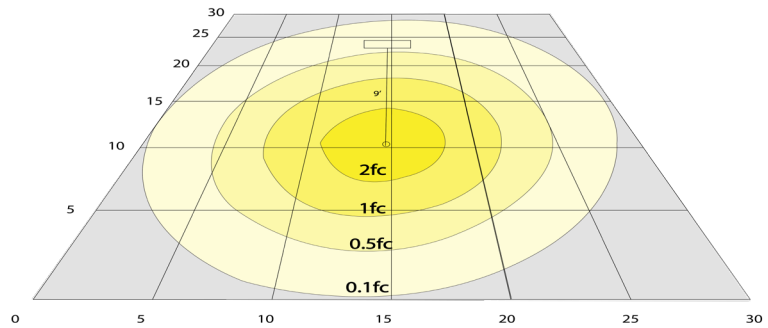

9W 5000K, Area 30'x 30' Mounting Height: 9'

Other Views:



Side View



Front View



Junction box 1-1/4" thick included with fixtures

Back View

Performance Table: RSL4-APD-MCT5

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
RSL4-APD-MCT5	10W	120V	700LM	2700K 3000K 3500K 4000K 5000K	B2-U1-G0	70

Sample Ordering

Model Style Color Temp.

RSL4 - APD - MCT5

Accessories:

- Blank = No Option For Accessories
- RSL-EXT-10FT-MCT = 10 FT. EXTENSION CABLE FOR USE WITH ALL SLIM LIGHT
- RSL4-RI-13 = 4" ROUND ROUGH-IN PLATE, 13" LONG
- RSL4-RI = 4" ROUND ROUGH-IN PLATE, 26" LONG
- RSL-346-RIBH = 3", 4", 6" (ADJUSTABLE) ROUND GALVANIZED PLATE WITH BAR HANGERS
- E26-CONVERTER = SCREW-IN ADAPTER THAT FITS ANY STANDARD
- RSL4-GR = GOOF RING FOR 4IN LIGHTS WITH BUTTERFLY WINGS
- RSL4-TRM-BK = 4" Black Clip-on Trim
- RSL4-TRM-ORB = 4" Oil-rubbed Bronze Clip-on Trim
- RSL4-TRM-CU = 4" Copper Clip-on Trim
- RSL4-TRM-BZ = 4" Bronze Clip-on Trim
- RSL4-TRM-BN = 4" Brushed Nickel Clip-on Trim
- RSL4-TRM-CH = 4" Chrome Clip-on Trim

Factory-Installed Option:

- Blank = No Option For Accessories
- OPT-EM-DL1EXT = EXTERNAL BATTERY BACKUP

ACCESSORIES:



E26-CONVERTER
Includes Medium Base E-26
Screw-in Adapter That Fits Any
Standard



RSL4-RI-13
4" Round Rough-in Plate,
13" Long



RSL-EXT-10FT-MCT
10 Ft. Extension Cable For use
with all Slim Light



RSL-346-RIBH
3", 4", 6" (Adjustable) Round Galvanized
plate with Bar Hangers



RSL4-RI
4" Round Rough-in Plate,
26" Long




Clip-on Trims
BK ORB CU BZ BN CH

FACTORY-INSTALLED OPTION:



OPT-EM-DL1EXT
EXTERNAL BATTERY BACKUP

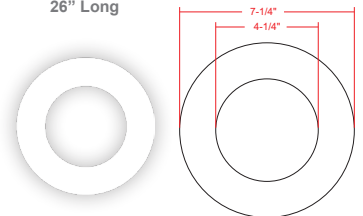

RSL4-GR
Goof Ring For 4in Lights With Butterfly
Wings



Compatible Dimmer List:

MODEL NO.	BRAND
6631-1LT	LEVITON
MACL-153MLH-AL	LUTRON
TGCL-153PH-LA	LUTRON
DVW-603PGH-WH	LUTRON
CT-600PR-WH	LUTRON
LGCL-153PHL-IV	LUTRON
TGCL-153PH-LA	LUTRON
LSLV603PWV	LUTRON
6674-POW	LEVITON
DVCL-153P	LUTRON
MSCL-OP153P	LUTRON
CTCL-153P	LUTRON
MACL-153M	LUTRON
HCL453PTCCCV6	PASS & SEYMOUR
LSLV603PWV	PASS & SEYMOUR

