# RSL SERIES RESIDENTIAL LIGHTING




1/2"

S

2/5"

RSLC6-BF-30K RSLC6-BF-40K RSLC6-BF-50K

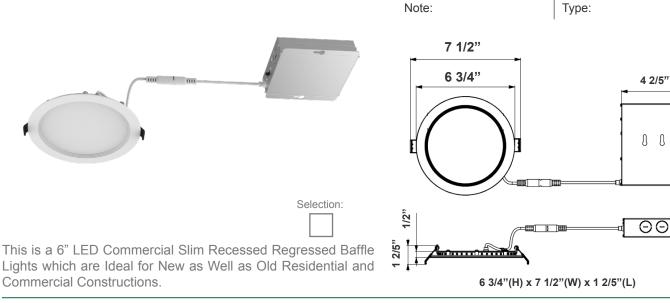

### Features

- Optics: White Translucent Acrylic
- **Die-Cast Aluminum With Powder Coat Finish**

## **Technical Specifications**

### **Electrical:**

- Voltage: 120-277V
- Wattage: 15W
- Power Factor: >0.9
- Efficacy: 80 LPW

### Mechanical:

- Die-Cast Aluminum With White Powder Coat Finish
- Junction Box Included With Fixture
- Junction Box thickness: 1-3/8"
- Cut-out Hole Diameter: 6-1/4"
- 24" DC cord from driver box to fixture .
- Operating Temperature: -4°F to 104°F
- **Recessed Mounting**
- 5-Year Warranty
- Suitable for Damp location

#### Other Models:

- 24W | 1900LM | RSLC8-BF-30K
- 24W | 1900LM | RSLC8-BF-40K
- 24W | 1900LM | RSLC8-BF-50K

### Lighting:

- Dimming: 0-10V Dimmable
- **Optics: White Translucent Acrylic** •

Junction Box Included With Fixture

Total Lumens: 1200LM •

7-Year Warranty

Customer Name:

Project Name:

- Color Temperatures: 3000K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 90
- Rated life: 50,000 Hrs
- Beam Angle: 110°


### **Applications:**

- New as well as Old Residential
- **Commercial Constructions**







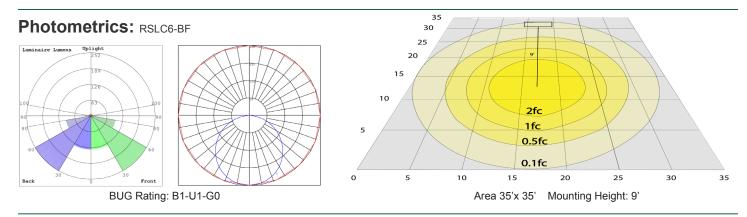

### **Other Views:**



Front View

Back View

#### Performance Table: RSLC6-BF

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	<b>BUG</b> Rating	LPW	
RSLC6-BF-30K RSLC6-BF-40K RSLC6-BF-50K	15W	120~277V	1200LM	3000K 4000K 5000K	B1-U1-G0	80	
Sample Ord	dering		ACCESSORIES	ACCESSORIES:			
Model Baffle Color Temp.   RSLC6 = BF =   3000K 3000K 3000K   4000K 5000K							
			<b>RSL6-R</b> 26" x 8 1/4"	RSL6-RI     RSL6-RI-13       26" × 8 1/4"     13 1/4" × 9"			
Blank = No Option For Accessories RSL6-RI = 6" Round Rough-in Plate, 26" Long RSL6-RI-13 = 6" Round Rough-in Plate, 13" Long RSL-BF-EXT-6IN= RSL-BF 6ID CC extension cord RSL-BF-EXT-10IN = RSL-BF 10ID CC extension cord RSL-BF-EXT-20IN= RSL-BF 20ID CC extension cord RSL-346-RIBH = 3", 4", 6" (Adjustable) Galvanized plate with Bar Hangers RSL6-GR = Goof Ring For 6in Lights with Butterfly Wings			RSL-BF-EX RSL-BF-EX RSL-BF-EX	T-6IN F-10IN F-20IN RSL	RSL6-GR 71/4" RSL6-RIBH		

## **WESTGATE**

