

RSL SERIES

RESIDENTIAL LIGHTING

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

RSLC8-BF-30K
RSLC8-BF-40K
RSLC8-BF-50K

Customer Name: _____

Project Name: _____

Note: _____


Type: _____



Selection:



This is a 8" LED Commercial Slim Recessed Regressed Baffle Lights which are Ideal for New as Well as Old Residential and Commercial Constructions.

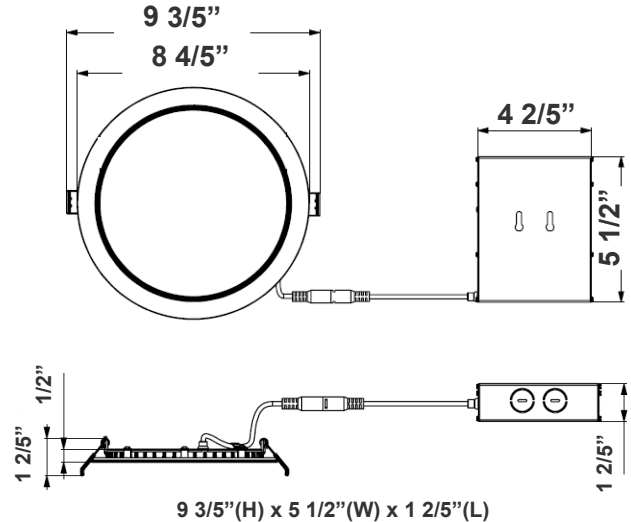

Features

- Optics: White Translucent Acrylic
- Die-Cast Aluminum With Powder Coat Finish
- Junction Box Included With Fixture
- 7-Year Warranty

Technical Specifications

Electrical:

- Voltage: 120-277V
- Wattage: 24W
- Power Factor: >0.9
- Efficacy: 79 LPW

Mechanical:

- Die-Cast Aluminum With White Powder Coat Finish
- Junction Box Included With Fixture
- Junction Box thickness: 1-3/8"
- Cut-out Hole Diameter: 8-3/8"
- 24" DC cord from driver box to fixture
- Operating Temperature: -4°F to 104°F
- Recessed Mounting
- 5-Year Warranty
- Suitable for Wet location

Lighting:

- Dimming: 0-10V Dimmable
- Optics: White Translucent Acrylic
- Total Lumens: 1900LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 90
- Rated life: 50,000 Hrs
- Beam Angle: 110°

Applications:

- New as well as Old Residential
- Commercial Constructions

Other Models:

- 12W | 900LM | RSLC6-BF-30K
- 12W | 900LM | RSLC6-BF-40K
- 12W | 900LM | RSLC6-BF-50K




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com | www.westgatecontrols.co




WG-Z9-Z9-Z2Z


Photometrics: RSLC8-BF

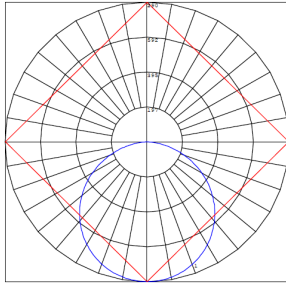


BUG Rating: B1-U2-G1

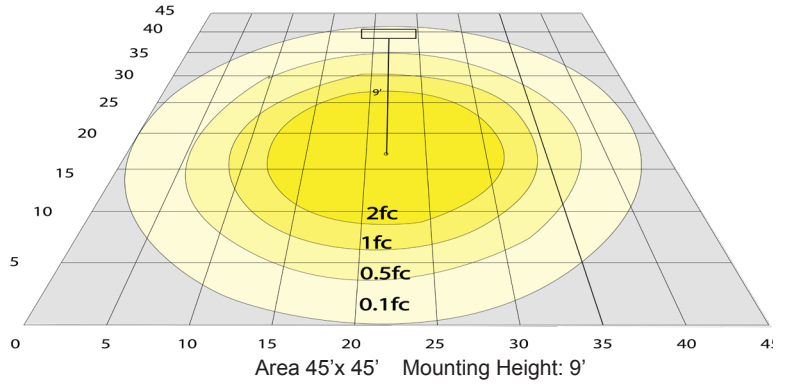

Other Views:

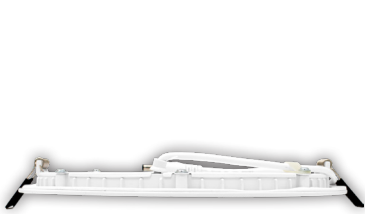

Side View

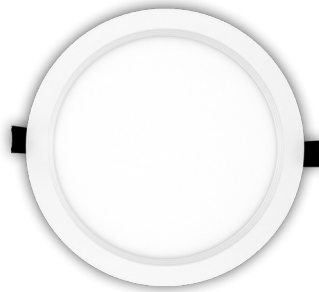

Front View



Back View

Performance Table: RSLC8-BF

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
RSLC8-BF-30K	24W	120~277V	1900LM	3000K	B1-U2-G1	75
RSLC8-BF-40K	24W	120~277V	1900LM	4000K	B1-U2-G1	75
RSLC8-BF-50K	24W	120~277V	1900LM	5000K	B1-U2-G1	75

Sample Ordering


Model Wattage Color Temp. Baffle

RSLC8 - 24W - - BF
 3000K
 4000K
 5000K

Accessories:

- Blank = No Option For Accessories
- RSL8-RI = 8" Round Rough-in Plate, 26" Long
- RSL-BF-EXT-6IN= RSL-BF 6in DC extension cord
- RSL-BF-EXT-10IN = RSL-BF 10in DC extension cord
- RSL-BF-EXT-20IN= RSL-BF 20in DC extension cord
- RSL8-GR = GOOF RING FOR 8in LIGHTS WITH BUTTERFLY WINGS


ACCESSORIES:

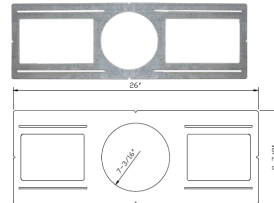

RSL8-RI
26" x 9 7/8"



RSL-BF-EXT-6IN
RSL-BF-EXT-10IN
RSL-BF-EXT-20IN



RSL8-GR
11 1/8"

Example:

- RSLC8-24W-BF-30K
- RSLC8-24W-BF-30K
RSL-BF-EXT-6IN

(FOR RSLC8 24W 3000K FIXTURE 120-277V)

(FOR RSLC8 24W 3000K FIXTURE 120-277V)
(RSL-BF 6in DC EXTENSION CORD)

