

RSLC8-BF-30K
RSLC8-BF-40K
RSLC8-BF-50K

Customer Name: _____

Project Name: _____

Note: _____



Type: _____



Selection:



This is a 8" LED Commercial Slim Recessed Regressed Baffle Lights which are Ideal for New as Well as Old Residential and Commercial Constructions.

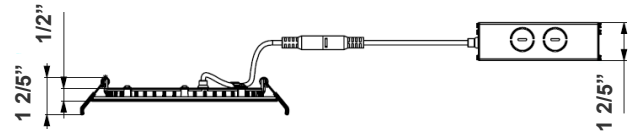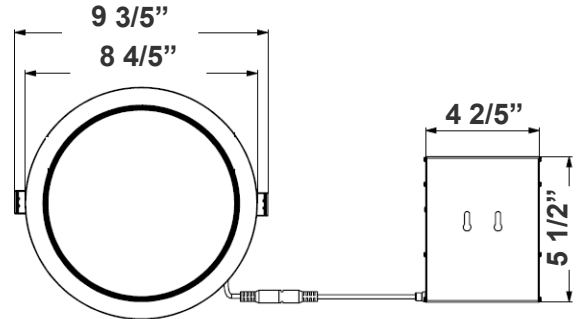

9 3/5" (H) x 5 1/2" (W) x 1 2/5" (L)

Features

- Optics: White Translucent Acrylic
- Die-Cast Aluminum With Powder Coat Finish
- Junction Box Included With Fixture
- 7-Year Warranty

Technical Specifications

Electrical:

- Voltage: 120-277V
- Wattage: 18W
- Power Factor: >0.9
- Efficacy: 80 LPW

Mechanical:

- Die-Cast Aluminum With White Powder Coat Finish
- Junction Box Included With Fixture
- Junction Box thickness: 1-3/8"
- Cut-out Hole Diameter: 7-1/3"
- 24" DC cord from driver box to fixture
- Operating Temperature: -4°F to 104°F
- Recessed Mounting
- 5-Year Warranty
- Suitable for Damp location

Lighting:

- Dimming: 0-10V Dimmable
- Optics: White Translucent Acrylic
- Total Lumens: 1440LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 90
- Rated life: 50,000 Hrs
- Beam Angle: 110°

Applications:


- New as well as Old Residential
- Commercial Constructions

Other Models:


- 15W | 1200LM | RSLC6-BF-30K
- 15W | 1200LM | RSLC6-BF-40K
- 15W | 1200LM | RSLC6-BF-50K



Photometrics: RSLC8-BF

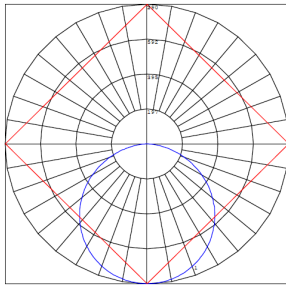


BUG Rating: B1-U2-G1

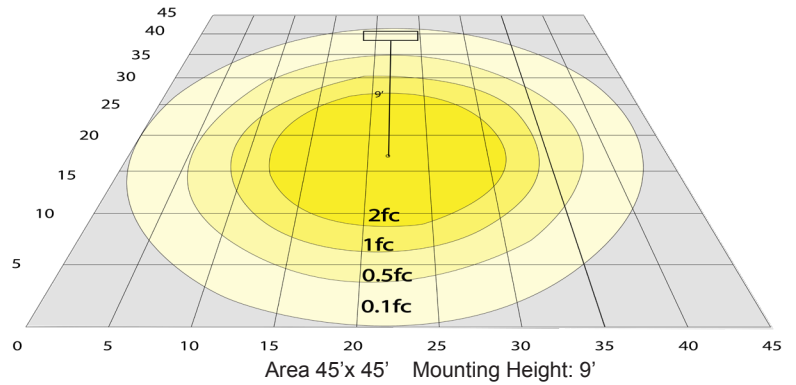

Other Views:



Side View

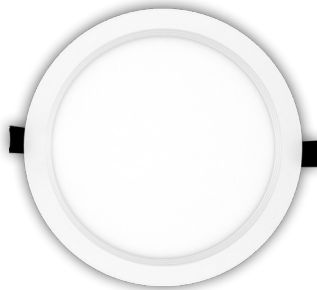

Front View



Back View

Performance Table: RSLC8-BF

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
RSLC8-BF-30K RSLC8-BF-40K RSLC8-BF-50K	18W	120~277V	1440LM	3000K 4000K 5000K	B1-U2-G1	75

Sample Ordering

Model Baffle Color Temp.


RSLC8 - BF -

3000K
4000K
5000K

Accessories:

Blank = No Option For Accessories
 RSL8-RI = 8" Round Rough-in Plate, 26" Long
 RSL-BF-EXT-6IN= RSL-BF 6in DC extension cord
 RSL-BF-EXT-10IN = RSL-BF 10in DC extension cord
 RSL-BF-EXT-20IN= RSL-BF 20in DC extension cord
 RSL8-GR = GOOF RING FOR 8in LIGHTS WITH BUTTERFLY WINGS


ACCESSORIES:

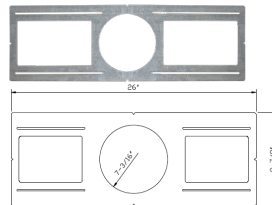

RSL8-RI
26" x 9 7/8"



RSL-BF-EXT-6IN
RSL-BF-EXT-10IN
RSL-BF-EXT-20IN



RSL8-GR
11 1/8"

