




**DIMENSIONS:**

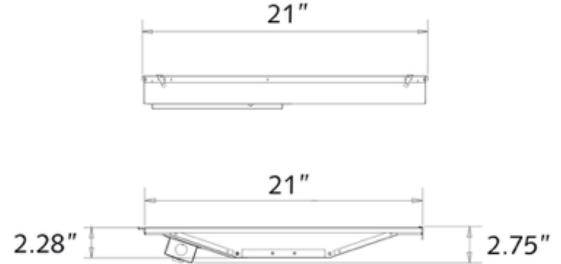

**RTR-2X2-40W-35K-D**  
**RTR-2X2-40W-40K-D**  
**RTR-2X2-40W-50K-D**

**LED DOOR FRAME TROFFER RETROFITS**

Replaces prismatic lens on standard fluorescent troffer retrofits to an LED troffer

**ELECTRICAL SPECIFICATIONS:**

- Voltage: 120~277VAC 50/60Hz
- Wattage: 40W
- Other available wattage: 52W for 2x4 Troffer Retrofit
- Lumen Output: 4000LM
- Color Temperature: 3500K, 4000K and 5000K
- 0~10V dimmable
- CRI: Ra>80
- Housing: Steel base with white powder coating
- Application: Indoor Only
- Lens: Frosted diffuse PC lens
- Operating Temp: -4°F ~ 131°F
- IP Rating: IP20
- Life Span: 50,000 hours
- Item Weight: 4.1 Kg (9.02 lbs)
- Retrofit brackets included


**WARRANTY:** 5 years

**CERTIFICATIONS:**




MODEL	WATTS	VOLTS	LUMENS	COLOR TEMP
RTR-2X2-40W-35K-D	40W	120~277VAC	4000LM	3500K
RTR-2X2-40W-40K-D	40W	120~277VAC	4000LM	4000K
RTR-2X2-40W-50K-D	40W	120~277VAC	4000LM	5000K

**Lux Chart:**

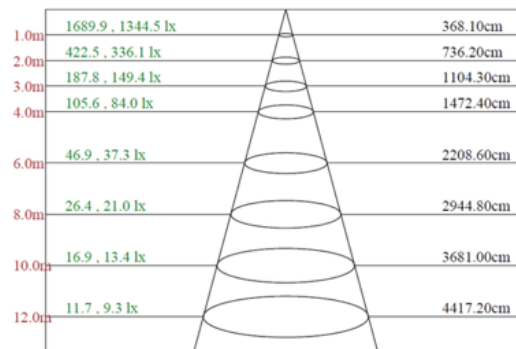

Max , Ave Beam angle of C225plane120.64

**Photometrics:**

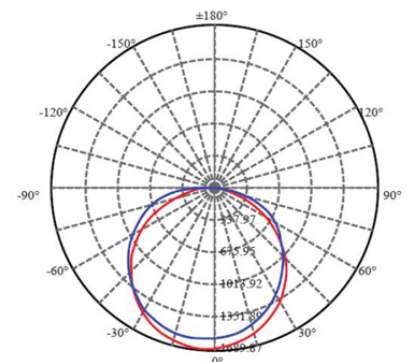

**RTR-2X2-40W-35K-D**

**RTR-2X2-40W-40K-D**

**RTR-2X2-40W-50K-D**

## LED DOOR FRAME TROFFER RETROFITS

MODEL	WATTS	VOLTS	LUMEN	COLOR TEMP
RTR-2X2-40W-35K-D	40W	120~277VAC	4000LM	3500K
RTR-2X2-40W-40K-D	40W	120~277VAC	4000LM	4000K
RTR-2X2-40W-50K-D	40W	120~277VAC	4000LM	5000K

### PHOTO METRICS