




DIMENSIONS:

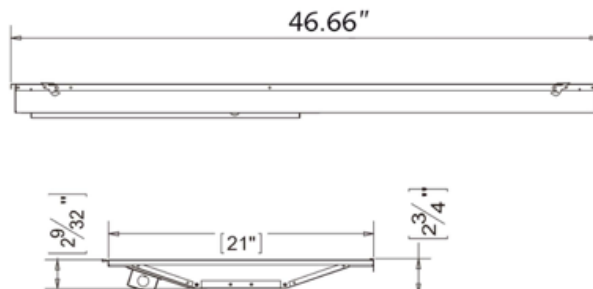

RTR-2X4-52W-35K-D RTR-2X4-52W-40K-D RTR-2X4-52W-50K-D

LED DOOR FRAME TROFFER RETROFITS

Replaces prismatic lens on standard fluorescent troffer retrofits

ELECTRICAL SPECIFICATIONS:

- Voltage: 120~277VAC 50/60Hz
- Wattage: 52W
- Other available wattage: 40W for 2x2 Troffer Retrofit
- Lumen Output: 5200LM
- Color Temperature: 3500K, 4000K and 5000K
- 0~10V dimmable
- CRI: Ra>80
- Housing: Steel base with white powder coating
- Application: Indoor Only
- Lens: Frosted diffuse PC lens
- Operating Temp: -4°F ~ 131°F
- IP Rating: IP20
- Life Span: 50,000 hours
- Item Weight: 4.1 Kg (9.02 lbs)
- Retrofit brackets included


WARRANTY: 5 years

CERTIFICATIONS:




MODEL	WATTS	VOLTS	LUMENS	COLOR TEMP
RTR-2X4-52W-35K-D	52W	120~277VAC	5200LM	3500K
RTR-2X4-52W-40K-D	52W	120~277VAC	5200LM	4000K
RTR-2X4-52W-50K-D	52W	120~277VAC	5200LM	5000K

Lux Chart:

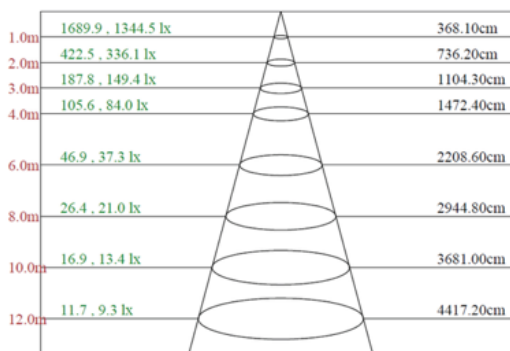

Max, Ave Beam angle of C225plane120.64

Photometrics:

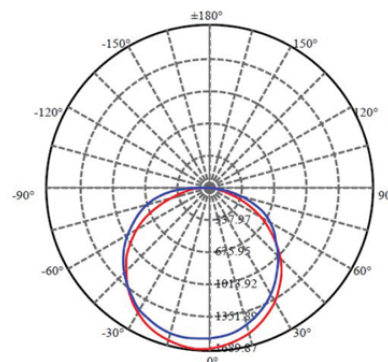

RTR-2X2-40W-35K-D

RTR-2X2-40W-40K-D

RTR-2X2-40W-50K-D

LED DOOR FRAME TROFFER RETROFITS

MODEL	WATTS	VOLTS	LUMEN	COLOR TEMP
RTR-2X2-40W-35K-D	40W	120~277VAC	4000LM	3500K
RTR-2X2-40W-40K-D	40W	120~277VAC	4000LM	4000K
RTR-2X2-40W-50K-D	40W	120~277VAC	4000LM	5000K

PHOTO METRICS