SCE SERIES

Commercial Lighting

SCE-4FT-40W-MCTP-D ADJUSTABLE BUILDER SERIES LINEAR LIGHT


Multi Color Temperature & Multi Power/Wattage (Selectable)



The SCE series offers the best and the most comprehensive selection for linear lighting. The various available lengths and widths allow the creation of the desired shape to elevate the areas aesthetics to a unique and modern look while providing an impressive illumination for the occupants. Ideal for, retail locations, offices, lobbies, conference rooms, reception areas, hallways, educational facilities, hotels, and restaurants. FEATURES: Superior Architectural Look Energy-efficient: Low Wattage Consumption & High Lumen Output Easier Wire Management & Install Variety of Mounting Options Multi Color Temperature (Selectable Switch Inside Fixture) Variety Of Factory Customizations Available



Customer Name:	
Project Name:	
Note:	Type:



2"(D) x 48"(W) x 2 1/4"(H)

Features

- Opal Polycarbonate Lens-Direct (DOWN) Lighting
- 5-Year Warranty

- 50,000 Hours Rated Life
- Lens Type: Opal Polycarbonate Lens

Technical Specifications

Electrical:

Voltage: 120-277VAC 50/60Hz
 Wattage: 30W/35W/40W
 Power Factor: >0.95
 LPW: 110LM/W

Mechanical:

- Low Profile Modern Design
- Aluminum Housing With Matte White Finish
- Custom Colors Available
- Lens Snaps into Housing
- Make Different Connections Via T/L/X Joints on Both Ends
- Optional Suspension Cable Kits Available. Suspension Cables are not Included
- Mounting Options: Surface, Suspended
- IP Rating: IP54
- Operating Temperature: -13°F~104°F

Lighting:

- Dimmable: 0~10V Dimming
 Total Lumens: 4400LM Max.
- Color Temperatures: 3500K/400DK/5000K
- Color Rendering Index: CRI ≥ 80
- Up Light Option Available
- Beam Angle: 104.8°(H) x 100.5°(V)

Applications:

- Ideal for offices, hotels, corridors, saloons, libraries, meeting rooms, conference halls, and the best solution for modern lighting solutions
- It can be used in any indoor applications

Other Models:

• 50W | 5500LM | SCE-6FT-50W-MCTP.D














Photometrics: SCE-4FT-40W-MCTP-D





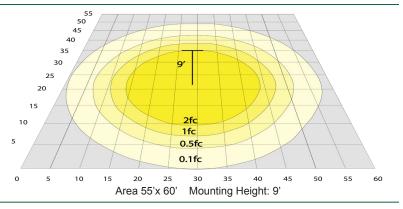

BUD Rating: B3-U3-G1

Other Views:







Front View

Performance Table: SCE-4FT-40W-MCTP-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
	30W		3300LM	3500K		
SCE-4FT-40W-MCTP-D	35W	120~277V	3850LM	4000K	B3-U3-G1	110
	40W		4400LM	5000K		

Sample Ordering

Model	Size	Wattage	Color Temp.	Feature

40W MCTP

Accessories:

Blank = No Option For Accessories

SCL-CS1-6FT = ADJ, 6FT 1/16in SINGLE SUSPENSION CANOPY SET WITH KEYHOLE END CON-NECTOR, NON-POWER SIDE

SCL-CS1P-6FT = ADJ. 6FT 1/16in SINGLE SUSPENSION CANOPY SET WITH KEYHOLE END CON-NECTOR, POWER SIDE WITH SJTW18/5 WHITE CORD

SCL-CS1P-6FT-NC = ADJ. 6FT 1/16in SINGLE SUSPENSION CANOPY SET WITH KEYHOLE END CONNECTOR

SCL-GS10 = ADJ. 10FT 1/16IN DOUBLE SUSPENSION CABLE WITH SINGLE KEYHOLE CONN., LOOP GRIPPER ON TOP SCL-GS20 = ADJ. 20FT 1/16IN DOUBLE SUSPENSION CABLE WITH SINGLE KEYHOLE CONN.,

LOOP GRIPPER ON TOP SCL-6FT-SJTW18/5 = 6ft White Cord, SJTW 18 AWG 5-Conductor (Black, White, Green + Purple &

Gray for 0-10V Dimming) SCL-6FT-SJTW18/5-100FT = 100ft Roll of White Cord, SJTW 18 AWG 5-Conductor (Black, White,

Green + Purple & Gray for 0-10V Dimming)

SCL-6FT-SJTW18/5-100FT-BK = 100ft Roll of Black Cord, SJTW 18 AWG 5-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming)

SCL-6FT-SJTW18/6-100FT = 100ft Roll of Black Cord, SJTW 18 AWG 6-Conductor (Black, White,

Green + Purple & Gray for 0-10V Dimming + Red for Backup Invertor) SCL-AH = Heavy-Duty Auxiliary Hook for Up To 1/16" Aircraft Cable

SCL-ASC-500FT = 1/16" 500 ft. Steel Aircraft Cable Suspension

OPT-FWH-63/65/66 = This is a 6FT 3/5/6-Wire Whip option

SCE-WM-KIT-SIL = Field-Installed Wall-Mounting Kit for SCE, Set of 2

* More Mounting Options Refer to page 4

Factory-Installed Options:

Blank = No Option For Accessories

OPT-HBC-125BS-WH = 10FT, 15A, 125V, 18/3 STR, WHT

* More Factory-Installed Options Refer to page 4

SUSPENDED MOUNTING ACCESSORIES (NOT INCLUDED)









SCL-6FT-SJTW18/5-100FT SCL-6FT-SJTW18/6-100FT

SCL-6FT-SJTW18/5-100FT-BK SCL-ASC-500FT





SCL-AH

SCL-6FT-SJTW18/5

FACTORY-INSTALLED OPTIONS:




OPT-HBC-125BS-WH







MOUNTING AND LINKING OPTIONS:

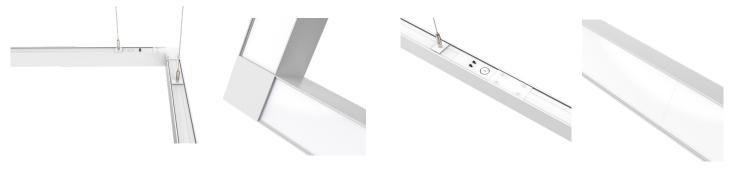

L Linking Bracket SCE-LB

Straight Linking Bracket SCE-SB



T Linking Bracket SCE-TB

X Linking Bracket SCE-XB



Up-Light SCE-ULM-4FT-MCTP-D



Field-Installed Wall-Mounting Kit for SCE SCE-WM-KIT-SIL





MOUNTING OPTIONS:

SUSPENSION ROD KITS (SET OF 2)

OCCI ENGICITITO (CET CI 2)		
Model	SIZE	9
SCL-RS-12	12 IN	
SCL-RS-18	18 IN	
SCL-RS-24	24 IN	9
SCL-RS-36	36 IN	
SCL-RS-48	48 IN	

LINKING Bracket

Model	DESCRIPTION		
SCE-SB	SCE Series Straight Linking Bracket		
SCE-TB	SCE Series T Linking Bracket		
SCE-LB	SCE Series L Linking Bracket		
SCE-XB	SCE Series X Linking Bracket		

INDIRECT (UP) LIGHTING

Model	SIZE	DESCRIPTION	Ţ
SCE-ULM-4FT-MCTP-D	4FT	4Ft SCE Series Uplight Module 35/40/50K Transfers 30% Power To Top	

WALL MOUNTING KIT

Model	SET	DESCRIPTION	
SCE-WM-KIT-SIL	2	Field-Installed Wall-Mounting Kit	





FACTORY-INSTALLED OPTIONS:

COLOR OF YOUR CHOICE

Model	DESCRIPTION	
OPT-CLR-SCX-4FT	Add this option and specify your desired color on your purchase order or provide a swatch to match.	

EMERGENCY BATTERY BACKUP

Model	DESCRIPTION	
OPT-EM-CM1INT	This is an option for a 90-minute backup battery installation. If you need to order this series for the fixture, please have your purchase order ready and call us or specify on the order which fixture to install this option and the test button.	+



