


SCE SERIES Commercial Lighting

SCE-8FT-70W-MCTP-D-SIL
BUILDER SERIES LINEAR LIGHT

MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)

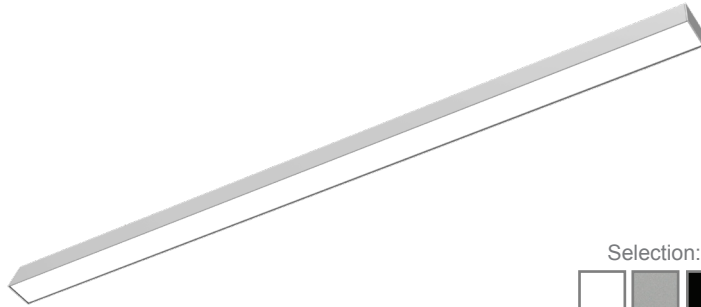

Selection:




The SCE series offers the best and the most comprehensive selection for linear lighting. The various available lengths and widths allow the creation of the desired shape to elevate the areas aesthetics to a unique and modern look while providing an impressive illumination for the occupants. Ideal for, retail locations, offices, lobbies, conference rooms, reception areas, hallways, educational facilities, hotels, and restaurants. FEATURES: Superior Architectural Look Energy-efficient: Low Wattage Consumption & High Lumen Output Easier Wire Management & Install Variety of Mounting Options Multi Color Temperature (Selectable Switch Inside Fixture) Variety Of Factory Customizations Available

Customer Name: _____

Project Name: _____

Note: _____ Type: _____

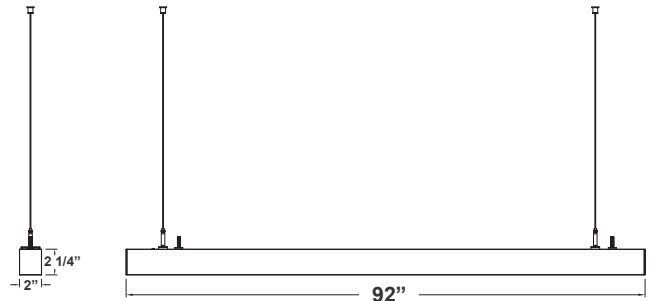

2"(D) x 92"(W) x 2 1/4"(H)

Features

- Opal Polycarbonate Lens-Direct (DOWN) Lighting
- 5-Year Warranty
- 50,000 Hours Rated Life
- Lens Type: Opal Polycarbonate Lens

Technical Specifications

Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 50W/60W/70W
- Power Factor: >0.95
- LPW: 110LM/W

Mechanical:

- Low Profile Modern Design
- Max daisy-chain length is 10 fixtures for SCE 8FT models. (Do not connect more than 10 units together.)
- Aluminum Housing With Matte White Finish
- Custom Colors Available
- Lens Snaps into Housing
- Make Different Connections Via T/L/X Joints on Both Ends
- Optional Suspension Cable Kits Available. Suspension Cables are not Included
- Mounting Options: Surface, Suspended
- IP Rating: IP54
- Operating Temperature: -13°F~104°F

Lighting:




- Dimmable: 0~10V Dimming
- Total Lumens: 7700LM Max.
- Color Temperatures: 3500K/400DK/5000K
- Color Rendering Index: CRI ≥ 80
- Up Light Option Available
- Beam Angle: 104.8°(H) x 100.5°(V)

Applications:

- Ideal for offices, hotels, corridors, saloons, libraries, meeting rooms, conference halls, and the best solution for modern lighting solutions
- It can be used in any indoor applications



Photometrics: SCE-8FT-70W-MCTP-D-SIL

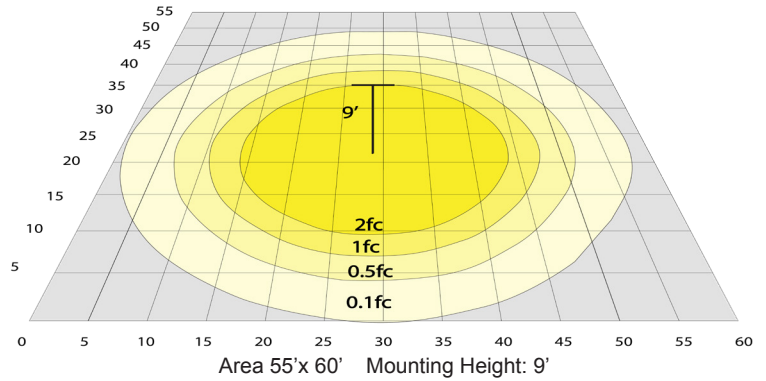

BUD Rating: B3-U3-G1


Other Views:



Front View



Bottom View



Back View

Performance Table: SCE-8FT-70W-MCTP-D-SIL

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SCE-8FT-70W-MCTP-D-SIL	50W	120~277V	5500LM	3500K	B3-U3-G1	110
	60W		6600LM	4000K		
	70W		7700LM	5000K		

Sample Ordering

Model	Size	Wattage	Color Temp.	Feature	Color
SCE	- 8FT	- 70W	- MCTP	- D	- SIL

Accessories:

- Blank = No Option For Accessories
- SCL-CS1-6FT = ADJ. 6FT 1/16IN SINGLE SUSPENSION CANOPY SET WITH KEYHOLE END CONNECTOR, NON-POWER SIDE
- SCL-CS1P-6FT = ADJ. 6FT 1/16IN SINGLE SUSPENSION CANOPY SET WITH KEYHOLE END CONNECTOR, POWER SIDE WITH SJTW18/5 WHITE CORD
- SCL-CS1P-6FT-NC = ADJ. 6FT 1/16IN SINGLE SUSPENSION CANOPY SET WITH KEYHOLE END CONNECTOR
- SCL-GS10 = ADJ. 10FT 1/16IN DOUBLE SUSPENSION CABLE WITH SINGLE KEYHOLE CONN., LOOP GRIPPER ON TOP
- SCL-GS20 = ADJ. 20FT 1/16IN DOUBLE SUSPENSION CABLE WITH SINGLE KEYHOLE CONN., LOOP GRIPPER ON TOP
- SCL-6FT-SJTW18/5 = 6ft White Cord, SJTW 18 AWG 5-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming)
- SCL-6FT-SJTW18/5-100FT = 100ft Roll of White Cord, SJTW 18 AWG 5-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming)
- SCL-6FT-SJTW18/5-100FT-BK = 100ft Roll of Black Cord, SJTW 18 AWG 5-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming)
- SCL-6FT-SJTW18/6-100FT = 100ft Roll of Black Cord, SJTW 18 AWG 6-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming + Red for Backup Inverter)
- SCL-AH = Heavy-Duty Auxiliary Hook for Up To 1/16" Aircraft Cable
- SCL-ASC-500FT = 1/16" 500 ft. Steel Aircraft Cable Suspension
- OPT-FWH-63/65/66 = This is a 6FT 3/5/6-Wire Whip option
- SCE-WM-KIT-SIL = Field-Installed Wall-Mounting Kit for SCE, Set of 3

* More Mounting Options Refer to page 4

Factory-Installed Options:

- Blank = No Option For Accessories
- OPT-HBC-125BS-WH = 10FT, 15A, 125V, 18/3 STR, WHT

* More Factory-Installed Options Refer to page 4


SUSPENDED MOUNTING ACCESSORIES (NOT INCLUDED)




FACTORY-INSTALLED OPTIONS:



MOUNTING AND LINKING OPTIONS:

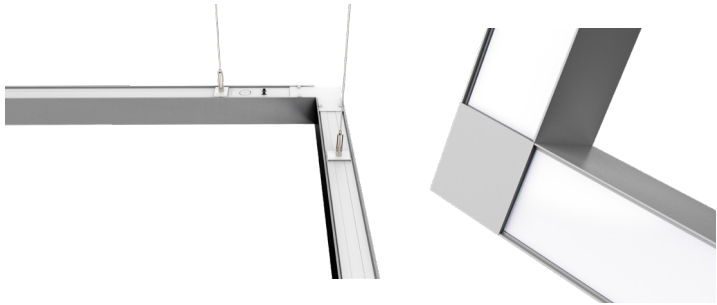

**L Linking Bracket
SCE-LB-SIL**

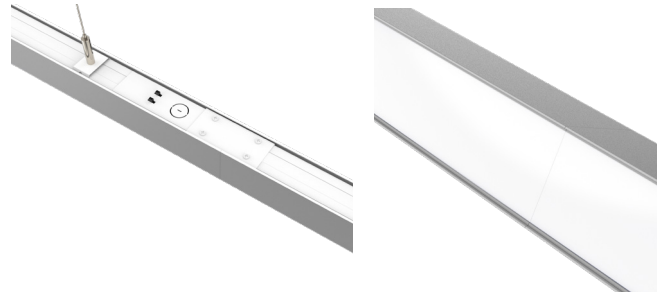

**Straight Linking Bracket
SCE-SB-SIL**




**T Linking Bracket
SCE-TB-SIL**



**X Linking Bracket
SCE-XB-SIL**



**Up-Light
SCE-ULM-6FT-MCTP-D-SIL**

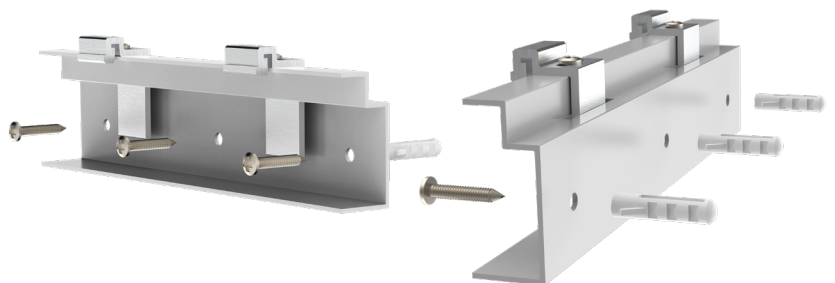


**Field-Installed Wall-Mounting
Kit for SCE
SCE-WM-KIT-SIL**



MOUNTING OPTIONS:

SUSPENSION ROD KITS (SET OF 2)

Model	SIZE
SCL-RS-12	12 IN
SCL-RS-18	18 IN
SCL-RS-24	24 IN
SCL-RS-36	36 IN
SCL-RS-48	48 IN

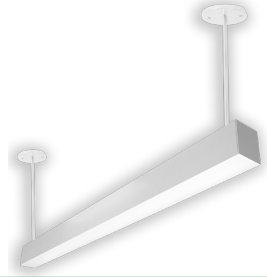


LINKING Bracket

Model	DESCRIPTION
SCE-SB-SIL	SCE Series Straight Linking Bracket
SCE-TB-SIL	SCE Series T Linking Bracket
SCE-LB-SIL	SCE Series L Linking Bracket
SCE-XB-SIL	SCE Series X Linking Bracket



INDIRECT (UP) LIGHTING

Model	SIZE	DESCRIPTION
SCE-ULM-6FT-MCTP-D-SIL	8FT	8Ft SCE Series Uplight Module 35/40/50K Transfers 30% Power To Top




WALL MOUNTING KIT

Model	SET	DESCRIPTION
SCE-WM-KIT-SIL	3	Field-Installed Wall-Mounting Kit




FACTORY-INSTALLED OPTIONS:

COLOR OF YOUR CHOICE

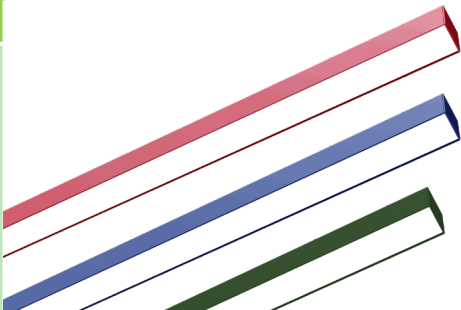Model	DESCRIPTION	
OPT-CLR-SCX-8FT	Add this option and specify your desired color on your purchase order or provide a swatch to match.	

EMERGENCY BATTERY BACKUP

Model	DESCRIPTION	
OPT-EM-CM1INT	This is an option for a 90-minute backup battery installation. If you need to order this series for the fixture, please have your purchase order ready and call us or specify on the order which fixture to install this option and the test button.	