
SCE SERIES

Commercial Lighting


SCE-8FT-70W-MCTP-D BUILDER SERIES LINEAR LIGHT

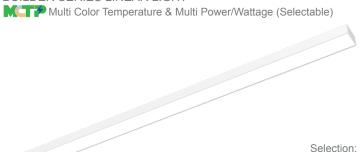

Selection:

The SCE series offers the best and the most comprehensive selection for linear lighting. The various available lengths and widths allow the creation of the desired shape to elevate the areas aesthetics to a unique and modern look while providing an impressive illumination for the occupants. Ideal for, retail locations, offices, lobbies, conference rooms, reception areas, hallways, educational facilities, hotels, and restaurants. FEATURES: Superior Architectural Look Energy-efficient: Low Wattage Consumption & High Lumen Output Easier Wire Management & Install Variety of Mounting Options Multi Color Temperature (Selectable Switch Inside Fixture) Variety Of Factory Customizations Available



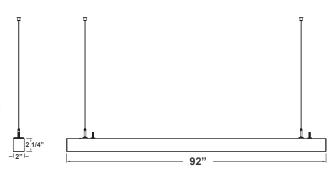

2"(D) x 92"(W) x 2 1/4"(H)

eatures

- Opal Polycarbonate Lens-Direct (DOWN) Lighting
- 5-Year Warranty

- 50.000 Hours Rated Life
- Lens Type: Opal Polycarbonate Lens

Technical Specifications

Electrical:

Voltage: 120-277VAC 50/60Hz Wattage: 50W/60W/70W Power Factor: >0.95 LPW: 110LM/W

Mechanical:

- Low Profile Modern Design
- Aluminum Housing With Matte White Finish
- Custom Colors Available
- Lens Snaps into Housing
- Make Different Connections Via T/L/X Joints on Both Ends
- Optional Suspension Cable Kits Available. Suspension Cables are not Included
- Mounting Options: Surface, Suspended
- IP Rating: IP54
- Operating Temperature: -13°F~104°F

Lighting:

- Dimmable: 0~10V Dimming Total Lumens: 7700LM Max.
- Color Temperatures: 3500K/400DK/5000K
- Color Rendering Index: CRI ≥ 80
- Up Light Option Available
- Beam Angle: 104.8°(H) x 100.5°(V)

Applications:

- Ideal for offices, hotels, corridors, saloons, libraries, meeting rooms, conference halls, and the best solution for modern lighting solutions
- It can be used in any indoor applications

Other Models:

40W | 4400LM | SCE-4FT-48W-MCTP-D














Photometrics: SCE-8FT-70W-MCTP-D





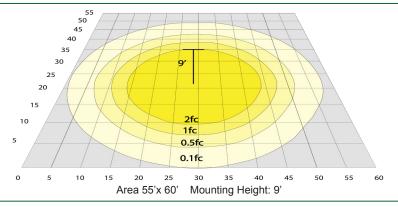

BUD Rating: B3-U3-G1

Other Views:







Front View

Back View

Performance Table: SCE-8FT-70W-MCTP-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SCE-8FT-70W-MCTP-D	50W 60W 70W	120~277V	5500LM 6600LM 7700LM	3500K 4000K 5000K	B3-U3-G1	110

Sample Ordering

Model	Size	Wattage	Color Temp.	Feature

70W MCTP

Accessories:

Blank = No Option For Accessories

SCL-CS1-6FT = ADJ. 6FT 1/16in SINGLE SUSPENSION CANOPY SET WITH KEYHOLE END CON-NECTOR, NON-POWER SIDE

SCL-CS1P-6FT = ADJ, 6FT 1/16in SINGLE SUSPENSION CANOPY SET WITH KEYHOLE END CON-NECTOR, POWER SIDE WITH SJTW18/5 WHITE CORD

SCL-CS1P-6FT-NC = ADJ. 6FT 1/16in SINGLE SUSPENSION CANOPY SET WITH KEYHOLE END

SCL-GS10 = ADJ. 10FT 1/16IN DOUBLE SUSPENSION CABLE WITH SINGLE KEYHOLE CONN., LOOP GRIPPER ON TOP

SCL-GS20 = ADJ. 20FT 1/16IN DOUBLE SUSPENSION CABLE WITH SINGLE KEYHOLE CONN., LOOP GRIPPER ON TOP

SCL-6FT-SJTW18/5 = 6ft White Cord, SJTW 18 AWG 5-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming) SCL-6FT-SJTW18/5-100FT = 100ft Roll of White Cord, SJTW 18 AWG 5-Conductor (Black, White,

Green + Purple & Gray for 0-10V Dimming) SCL-6FT-SJTW18/5-100FT-BK = 100ft Roll of Black Cord, SJTW 18 AWG 5-Conductor (Black, White,

Green + Purple & Gray for 0-10V Dimming) SCL-6FT-SJTW18/6-100FT = 100ft Roll of Black Cord, SJTW 18 AWG 6-Conductor (Black, White,

Green + Purple & Gray for 0-10V Dimming + Red for Backup Invertor)

SCL-AH = Heavy-Duty Auxiliary Hook for Up To 1/16" Aircraft Cable

SCL-ASC-500FT = 1/16" 500 ft. Steel Aircraft Cable Suspension OPT-FWH-63/65/66 = This is a 6FT 3/5/6-Wire Whip option

SCE-WM-KIT-SIL = Field-Installed Wall-Mounting Kit for SCE, Set of 3

* More Mounting Options Refer to page 4

Factory-Installed Options:

Blank = No Option For Accessories

OPT-HBC-125BS-WH = 10FT, 15A, 125V, 18/3 STR, WHT

* More Factory-Installed Options Refer to page 4

SUSPENDED MOUNTING ACCESSORIES (NOT INCLUDED)









SCL-6FT-SJTW18/5-100FT SCL-6FT-SJTW18/6-100FT

SCL-6FT-SJTW18/5-100FT-BK SCL-ASC-500FT







SCL-AH

SCL-6FT-SJTW18/5


FACTORY-INSTALLED OPTIONS:



OPT-HBC-125BS-WH



MOUNTING AND LINKING OPTIONS:

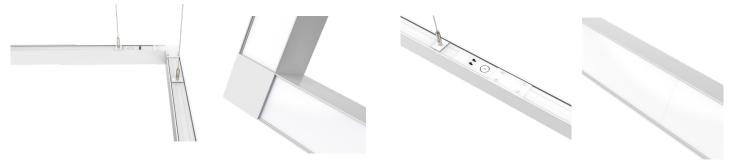

L Linking Bracket SCE-LB-SIL

Straight Linking Bracket SCE-SB-SIL



T Linking Bracket SCE-TB-SIL

X Linking Bracket SCE-XB-SIL



Up-Light SCE-ULM-6FT-MCTP-D-SIL

Field-Installed Wall-Mounting Kit for SCE SCE-WM-KIT-SIL





MOUNTING OPTIONS:

SUSPENSION ROD KITS (SET OF 2)

COOL ENGINE (CET OF 2)		
Model	SIZE	
SCL-RS-12	12 IN	
SCL-RS-18	18 IN	
SCL-RS-24	24 IN	•
SCL-RS-36	36 IN	
SCL-RS-48	48 IN	

LINKING Bracket

Model	DESCRIPTION		
SCE-SB	SCE Series Straight Linking Bracket		
SCE-TB	SCE Series T Linking Bracket	A	
SCE-LB	SCE Series L Linking Bracket		
SCE-XB	SCE Series X Linking Bracket		

INDIRECT (UP) LIGHTING

Model	SIZE	DESCRIPTION	1
SCE-ULM-8FT-MCTP-D-SIL	8FT	8Ft SCE Series Uplight Module 35/40/50K Transfers 30% Power To Top	

WALL MOUNTING KIT

WALL MOONTHOO KIT			
Model	SET	DESCRIPTION	
SCE-WM-KIT-SIL	3	Field-Installed Wall-Mounting Kit	





FACTORY-INSTALLED OPTIONS:

COLOR OF YOUR CHOICE

Model	DESCRIPTION	
OPT-CLR-SCX-8FT	Add this option and specify your desired color on your purchase order or provide a swatch to match.	

EMERGENCY BATTERY BACKUP

Model	DESCRIPTION	
OPT-EM-CM1INT	This is an option for a 90-minute backup battery installation. If you need to order this series for the fixture, please have your purchase order ready and call us or specify on the order which fixture to install this option and the test button.	+



