




SCLR-4FT-40W-50K-D
SCLR-4FT-40W-40K-D
SCLR-4FT-40W-35K-D



Down Light

DIMENSIONS:

47.2"(L) x 3.4"(W) x 3.4"(H)

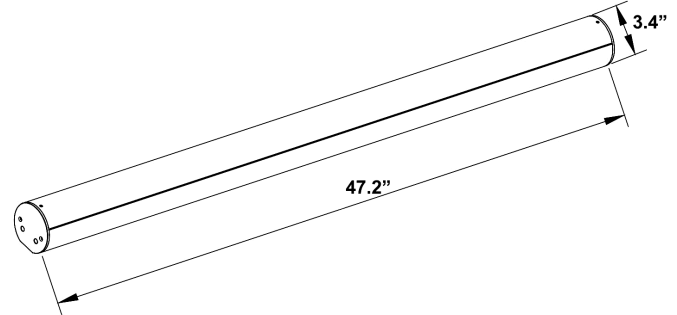

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
SCLR-4FT-40W-50K-D	40W	120~277VAC	4400LM	5000K
SCLR-4FT-40W-40K-D	40W	120~277VAC	4400LM	4000K
SCLR-4FT-40W-35K-D	40W	120~277VAC	4400LM	3500K

**LED ARCHITECTURAL ROUND SUPENDED
COMMERCIAL LIGHTS (4FT.)**

Ideal for hotel, offices, retail outlets, restaurant, parking garages, storage room, conference room, education facilities and more.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 40W
- Power factor: >0.95
- Efficacy: 110LM/W

HOUSING SPECIFICATIONS:

- White, Die-cast Aluminum
- No tandem connection
- Operating temperature: -13°F ~ 104°F
- Lifespan: 50,000 Hrs.
- IP rating: IP20

CERTIFICATIONS: UL, DLC



OPTIONAL ACCESSORIES:



SCL-6FT-SJTW18/5



SCL-CS

MODEL	DESCRIPTION
SCL-CS	Adjustable 6 Ft. Suspension Kit Select a Single-Connector Key Hole Set (Not Included)
SCL-6FT-SJTW18/5	6Ft. Cord SJTW 18 AWG 5-Conductor (Not Included)

LIGHTING SPECIFICATIONS:

- Dimming: 0~10V dimmable
- Lens: Prismatic Polycarbonate
- Total lumens: 4400LM
- Color temperature: 5000K/4000K/3500K
- Color rendering index: >80

WARRANTY: 5 years




SCLR-4FT-40W-50K-D
SCLR-4FT-40W-40K-D
SCLR-4FT-40W-35K-D

**LED ARCHITECTURAL ROUND SUPENDED
COMMERCIAL LIGHTS (4FT.)**

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
SCLR-4FT-40W-50K-D	40W	120~277VAC	4400LM	5000K
SCLR-4FT-40W-40K-D	40W	120~277VAC	4400LM	4000K
SCLR-4FT-40W-35K-D	40W	120~277VAC	4400LM	3500K

PHOTOMETRICS CHARTS:

Luminous Intensity Distribution Curve

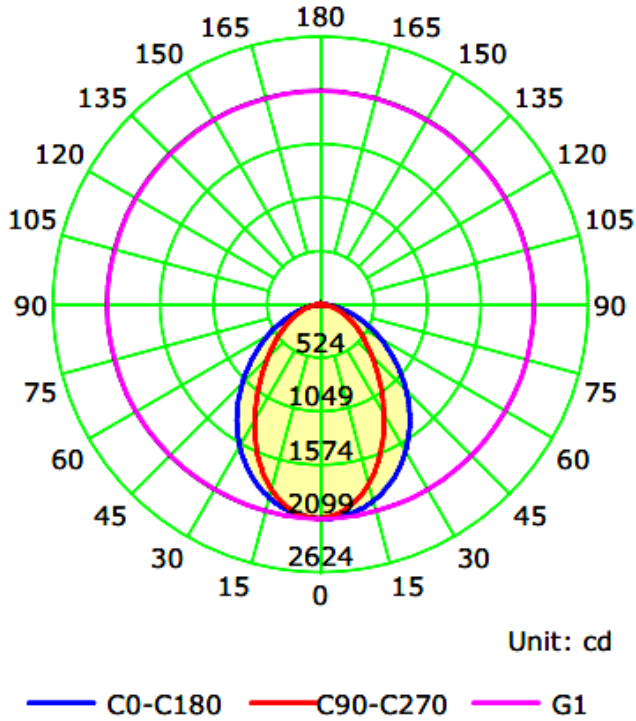

Illuminance at a Distance

