

SCLT SERIES

COMMERCIAL INDOOR LIGHTING

WESTGATE

THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

SCLT-4FT-40W-MCT-D

LED PARABOLIC SUSPENDED DOWN LIGHT

Customer Name: _____


Project Name: _____

Note: _____

Type: _____



MCT
Selection:

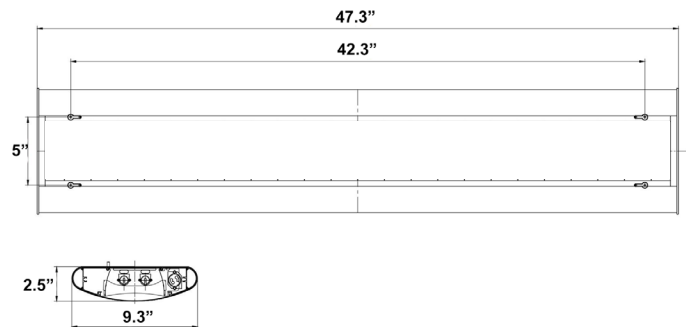

5" H x 2 1/2" D x 47.3" W

Ideal for Storage rooms, Offices Conference rooms, Retail Reception areas, Hallways Education facilities

Features

- Lens: Translucent Lens
- Housing: Anodized Aluminum
- 5-Year Warranty
- Rated Life: 50,000 Hrs
- Multi CCT: Switch Located Inside on the LED board

Technical Specifications

Electrical:

- Voltage: 120-277V AC 60Hz
- Wattage: 40W
- Power Factor: >0.95
- Efficacy: 115 LPW
- THD: <20%

Mechanical:

- Housing: Anodized Aluminum
- Polycarbonate End Caps
- Finish: Powder Coated White
- Ambient Temperature: -22°F to +104°F
- 5-year Warranty

Lighting:

- Multi CCT: Switch Located Inside on the LED board
- Lens: Translucent Lens
- High Quality LED Chips provide High Efficiency, Heat Dissipation, Stability, and Lumen Maintenance
- Dimmable: 0~10V Dimmable
- Lumens Range: 4600LM
- Color Temperatures: 3500K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 80
- Rated Life: 50,000 Hrs

Applications:

- Storage rooms
- Offices
- Conference rooms
- Retail
- Reception Areas
- Hallways
- Education Facilities





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |




WG-ZA-Z7-2Z

Photometrics: SCLT-4FT-40W-MCT-D



BUG Rating: B2-U2-G1

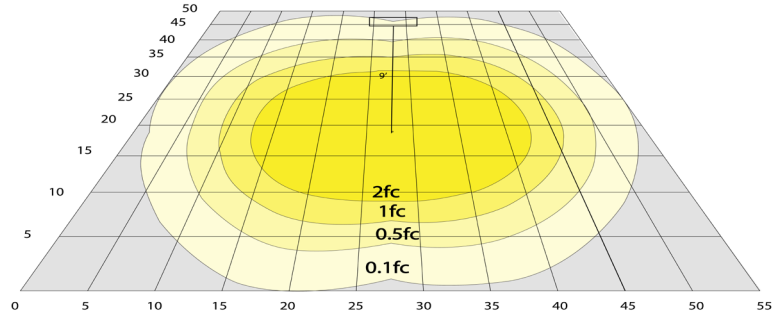

Area 50'x 55' Mounting Height: 9'


Other Views:



Side View



Front View



Back View

Performance Table: SCLT-4FT-40W-MCT-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SCLT-4FT-40W-MCT-D	40W	120~277V	4600LM	3500K	B2-U2-G1	115
				4000K		
				5000K		

Sample Ordering

Model	Size	Watt	Color Temp.	Dimming
SCLT	4FT	40W	MCT	D

Factory-Installed Options:

Blank = No Option For Accessories
 OPT-EM-SL1INT = EMERGENCY BACKUP INTERNAL BATTERY
 OPT-CLR-100 = COLOR PAINT
 WEC-3RC = REMOTE CONTROL
 OPT-SEN-2US = ULTRASONIC BI-LEVEL DIMMING (REMOTE NOT NEEDED)

FACTORY-INSTALLED OPTIONS:



OPT-EM-SL1INT



OPT-SEN-2US



WEC-3RC

Example:

- SCLT-4FT-40W-MCT-D
- SCLT-4FT-40W-MCT-D
OPT-EM-SL1INT

(FOR SCLT 40W MCT FIXTURE 120-277V)

(FOR SCLT 40W MCT FIXTURE 120-277V)
 (EMERGENCY BACKUP INTERNAL BATTERY)

