

SCR SERIES Commercial Lighting

SCR-48D-MCTP-D
LED ARCHITECTURAL 48in ROUND SUSPENDED LIGHT


MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____ Type: _____

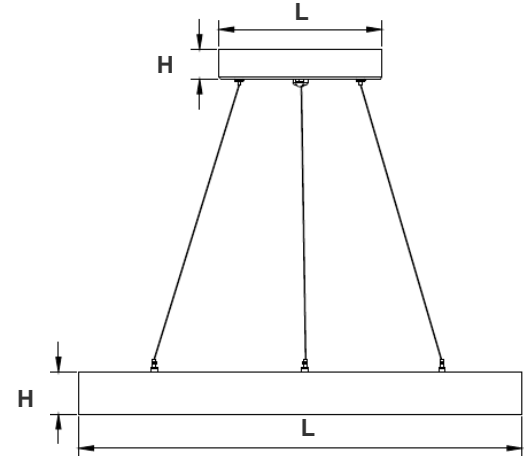

Canopy Dimension: 8 3/5"(L) x 2 1/2"(H)
Fixture Dimension: 48"(L) x 2 1/4"(H)

A modern decorative Euro-design suspended light suitable for conference tables, creative offices and department stores.

Features

- LED Superior Architectural Lights
- Aluminum Housing With Sandy White Finish
- MCTP: Multi Color Temperature and Power (Selectable, the switches are inside the Canopy)
- 5-Year Warranty

Technical Specifications

Electrical:

- Voltage: 120-277V AC 50/60Hz
- Wattage: 60W/80W/100W
- Power Factor: >0.98
- LPW: 110 LM/W
- Total Harmonic Distortion: ≤19 %

Mechanical:

- Aluminum Housing With Sandy White Finish
- Three 10FT Adjustable Suspension Cables
- Opal Polycarbonate Lens - Direct Down Light,
- Operating Temperature: -46°F to 104°F
- IP Rating: IP20
- 5-Year Warranty

Lighting:



- Dimmable: 0~10V Dimming
- Total Lumens: 11000LM
- Color Temperatures: 3000K/3500K/4000K
- MCTP: Multi Color Temperature and Power (Selectable, the switches are inside the Canopy)
- Color Rendering Index: CRI ≥ 80
- 50,000 Hours Rated Life
- Beam Angle: 114°(H) x 114°(V)

Applications:


- Ideal for offices, hotels, corridors, saloons, libraries, meeting rooms, conference halls, and the best solution for modern lighting solutions
- It can be used in any indoor applications



Photometrics: SCR-48D-MCTP-D

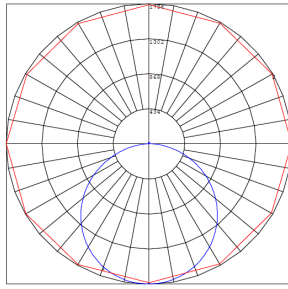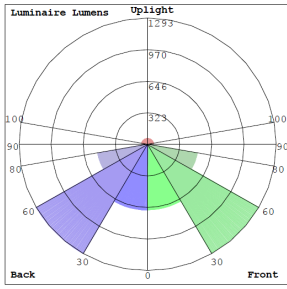

BUD Rating: B2-U3-G1

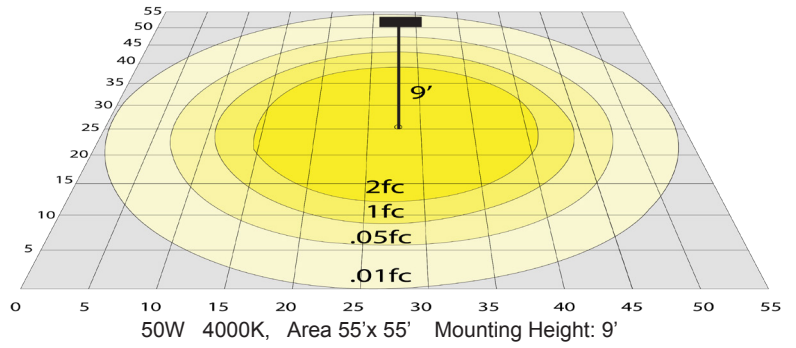


Other Views:

Direct:



Side View

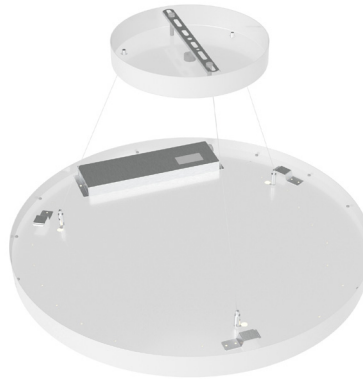

Top View



Bottom View

Performance Table: SCR-48D-MCTP-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SCR-48D-MCTP-D	60W 80W 100W	120~277V	6600 8800 11000	3000K 3500K 4000K	B2-U3-G1	110

Sample Ordering

Model **Size** **Color Temp.** **Dimming**

SCR - 48D - MCTP - D

Factory-Installed Options:

Blank = No Option For Accessories
 OPT-EM-SL1INT = EMERGENCY BACKUP INTERNAL BATTERY
 OPT-SEN-2MDR-36 = PROGRAMMABLE MICROWAVE BI-LEVEL
 WEC-3RC = REMOTE CONTROL
 OPT-SCR-ULK = FACTORY-INSTALLED UPLIGHT, 14" DIAMETER, 900LM, S30K/40K/50K SELECTABLE

FACTORY-INSTALLED OPTIONS:



OPT-SEN-2US



OPT-EM-SL1INT



WEC-3RC

