

SCRH SERIES Commercial Lighting

SCRH-UD-18-MCT5-DD-WH

SCRH-UD-18-MCT5-DD-BK

18" HOLLOW CIRCLE PENDANT WITH UPLIGHT

MCTP Multi Color Temperature (Selectable)



Avail Finishes:



The Hollow Circle Pendant with Uplight is a sleek and modern lighting fixture designed to provide both functional and ambient lighting. Featuring a minimalist hollow circle design, it delivers uplighting that enhances the ceiling while creating a soft, even glow. Perfect for contemporary spaces, it is ideal for residential, commercial, and hospitality settings, offering style and sophistication.

WESTGATE


THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

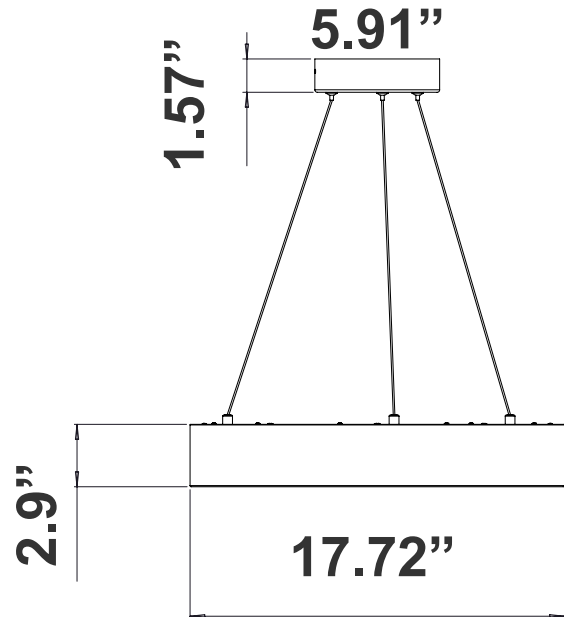

Canopy Dimension: 5.91"(W) x 1.57"(H)
Fixture Dimension: 17.72"(W) x 2.9"(H)

Features

- LED Superior Architectural Lights
- Aluminum Housing With Sandy White Finish
- MCTP: Multi Color Temperature and Power (Selectable, the switches are inside the Canopy)
- 5-Year Warranty

Technical Specifications

Electrical:

- Voltage: 120-277V AC 50/60Hz
- Wattage: 30W
- Power Factor: >0.98
- LPW: 50 LM/W
- Total Harmonic Distortion: ≤19 %

Mechanical:

- Aluminum Housing With Sandy White Finish
- Light Accent Functionality With a Removable Plate Covering the Lens
- Three 10FT Adjustable Suspension Cables
- Opal Polycarbonate Lens - Direct Down Light,
- Operating Temperature: -46°F to 104°F
- IP Rating: IP20
- 5-Year Warranty

Lighting:

- Dimming: (Dual Function) Triac Dimmable at 120V & 0-10V Dimming at 120-277V
- Total Lumens: 1500LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- MCTP: Multi Color Temperature and Power (Selectable, the switches are inside the Canopy)
- Color Rendering Index: CRI ≥ 90
- Beam Angle: 114°(H) x 114°(V)
- 50,000 Hours Rated Life

Applications:

- Ideal for offices, hotels, corridors, saloons, libraries, meeting rooms, conference halls, and the best solution for modern lighting solutions
- It can be used in any indoor applications





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatetmfg.com




WG-20250122

Photometrics: SCRH-UD-18-MCT5-DD



BUD Rating: B2-U3-G1

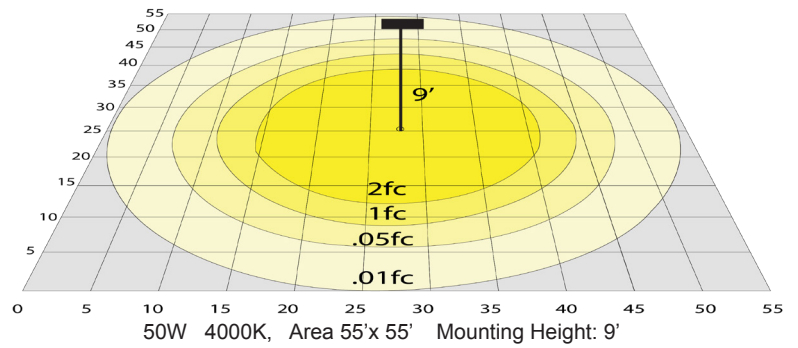


Other Views:

White:



Side View



Top View




Bottom View

Black:



Side View



Top View



Bottom View

Performance Table: SCRH-UD-18-MCT5-DD

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SCRH-UD-18-MCT5-DD-WH SCRH-UD-18-MCT5-DDBK	30W	120~277V	1500	2700K 3000K 3500K 4000K 5000K	B2-U3-G1	50

Sample Ordering

Model	Style	Size	Color Temp.	Dimming	Finish					
SCRH	-	UD	-	18	-	MCTP	-	DD	-	
WH = White BK = Black										

Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-SL1INT = EMERGENCY BACKUP INTERNAL BATTERY

OPT-SEN-2US = ULTRASONIC BI-LEVEL DIMMING

FACTORY-INSTALLED OPTIONS:



OPT-SEN-2US



OPT-EM-SL1INT

