SCRH SERIES Commercial Lighting

SCRH-WS-WH
SCRH-WS-BK
8" HOLLOW CIRCLE WALL SCONCE WITH UPLIGHT
MCTP Multi Color Temperature (Selectable)

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name:
Project Name:
Note: | Type:

Avail Finishes:

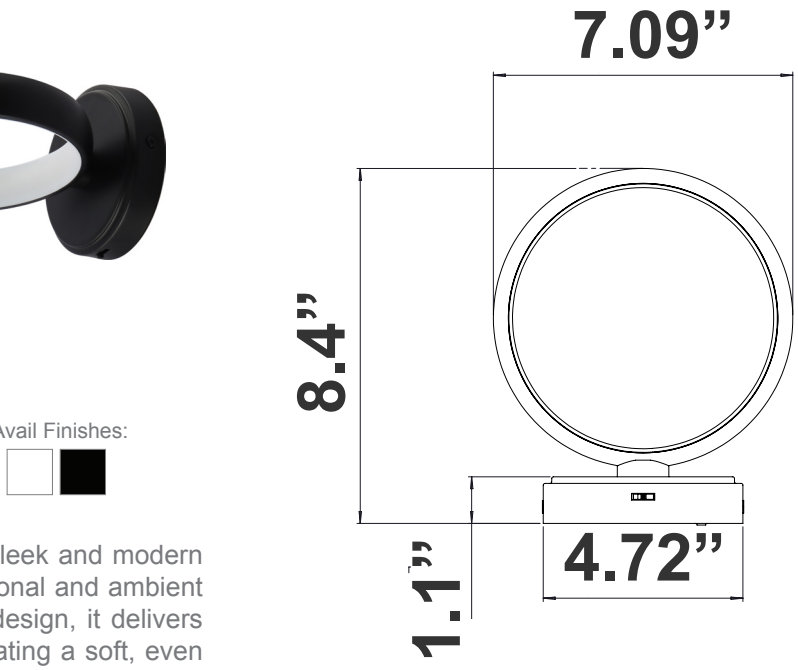

7.09"(W) x 8.4"(H) x 4.72"(D)

The Hollow Circle Pendant with Uplight is a sleek and modern lighting fixture designed to provide both functional and ambient lighting. Featuring a minimalist hollow circle design, it delivers uplighting that enhances the ceiling while creating a soft, even glow. Perfect for contemporary spaces, it is ideal for residential, commercial, and hospitality settings, offering style and sophistication.

Features

- LED Superior Architectural Lights
- Aluminum Housing With Sandy White Finish
- MCTP: Multi Color Temperature and Power (Selectable, the switches are inside the Canopy)
- 5-Year Warranty

Technical Specifications

Electrical:

- Voltage: 120-277V AC 50/60Hz
- Wattage: 10W
- Power Factor: >0.98
- LPW: 50 LM/W
- Total Harmonic Distortion: ≤19 %

Mechanical:

- Aluminum Housing With Sandy White Finish
- Operating Temperature: -46°F to 104°F
- IP Rating: IP20
- 5-Year Warranty

Lighting:

- Total Lumens: 500LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- MCTP: Multi Color Temperature and Power (Selectable, the switches are inside the Canopy)
- Color Rendering Index: CRI ≥ 90
- Beam Angle: 114°(H) x 114°(V)
- 50,000 Hours Rated Life

Applications:

- Ideal for offices, hotels, corridors, saloons, libraries, meeting rooms, conference halls, and the best solution for modern lighting solutions
- It can be used in any indoor applications

Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com

Photometrics: SCRH-WS

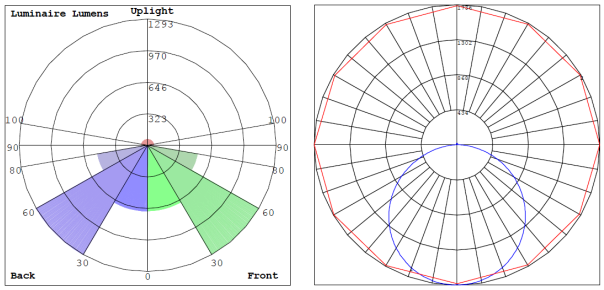

BUD Rating: B2-U3-G1

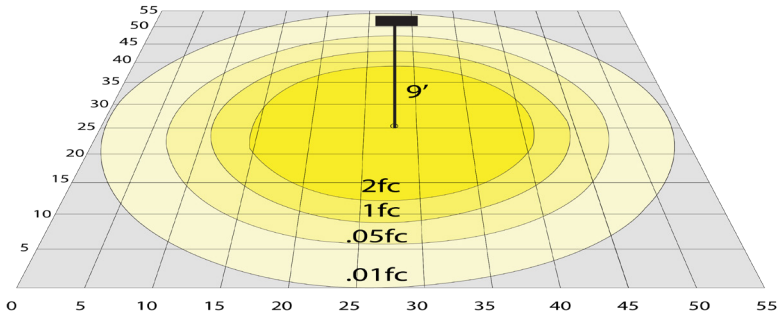

50W 4000K, Area 55'x 55' Mounting Height: 9'

Other Views:

White:

Side View

Top View

Bottom View

Black:

Side View

Top View

Bottom View

Performance Table: SCRH-WS

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SCRH-WS-WH SCRH-WS-BK	10W	120~277V	500LM	2700K 3000K 3500K 4000K 5000K	B2-U3-G1	50

Sample Ordering

Model	Style	Finish
SCRH	WS	

WH = White
BK = Black